Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Sweetcrispy SW-SZT

Sweetcrispy Vanity Desk with LED Mirror and Charging Station

INSTRUCTION MANUAL

Introduction

This manual provides comprehensive instructions for the assembly, operation, maintenance, and troubleshooting of your Sweetcrispy Vanity Desk (Model SW-SZT). Please read this manual thoroughly before assembly and use to ensure proper function and longevity of your product. Keep this manual for future reference.

Safety Information

- Always assemble the product on a clean, soft surface to prevent scratches.
- Ensure all screws and fasteners are securely tightened before use.
- Do not overload drawers or shelves.
- Keep electrical components (LED mirror, charging station) away from water.
- Use the included anti-rollover device to secure the vanity to a wall, preventing accidental tipping.
- Keep small parts away from children during assembly.

Package Contents

Verify that all components are present before beginning assembly. Refer to the included parts list for identification.

▶ **Watch video online**
All components of the Sweetcrispy Vanity Desk laid out for assembly

Image: All components of the Sweetcrispy Vanity Desk laid out for assembly, including wooden panels, hardware, and the LED mirror unit.

Setup and Assembly

Follow these steps carefully for assembly. It is recommended to have two people for certain steps, especially when handling the mirror.

▶ **Watch video online**
Sweetcrispy Vanity Desk with Mirror and Light Install Video

Video: Detailed assembly instructions for the Sweetcrispy Vanity Desk with LED Mirror and Charging Station.

1. **Prepare Panels:** Insert screws into the designated holes on the main base panel and side panels as indicated in the instructions.
2. **Attach Drawer Slides:** Secure the drawer slides to the side panels using the provided screws. Ensure they are aligned correctly for smooth drawer operation.
3. **Assemble Base Frame:** Connect the base frame pieces using the provided hardware, ensuring a sturdy and level foundation.
4. **Construct Cabinet Sections:** Assemble the individual cabinet sections, including the central support and side panels, using dowels and screws.
5. **Attach Top Panel:** Carefully place and secure the top panel onto the assembled base and cabinet sections.
6. **Assemble Drawers:** Construct the two drawers, attaching the handles and drawer slides. Ensure the drawer bottom is inserted correctly.
7. **Install Cabinet Door:** Attach the hinges to the cabinet door and then secure the door to the cabinet. Adjust hinges if necessary for proper alignment.
8. **Install LED Mirror:** Carefully place the LED mirror unit onto the top panel, aligning it with the pre-drilled holes. Secure it from the back.
9. **Connect LED Lights:** Pass the wires of the LED lights through the pre-drilled holes. Gently press the bulbs into place and secure them with nuts from the back. Ensure wire colors match when connecting.
10. **Install Charging Station:** Route the charging station cable through the designated opening and secure the charging station unit to the side panel with screws.
11. **Install Anti-Rollover Device:** Attach the anti-rollover straps to the back of the vanity using the short screws, and then secure the straps to a wall stud.

Operating Instructions

LED Mirror Lights

The integrated LED mirror features adjustable lighting modes and brightness.

- **Power On/Off:** Touch the power icon on the mirror surface to turn the lights on or off.
- **Change Color Temperature:** Briefly touch the mode icon to cycle through three lighting colors: Cold Light (6000K), Nature Light (4000K), and Warm Light (3000K).
- **Adjust Brightness:** Long-press the power icon to dim or brighten the lights. Release when the desired brightness is achieved.

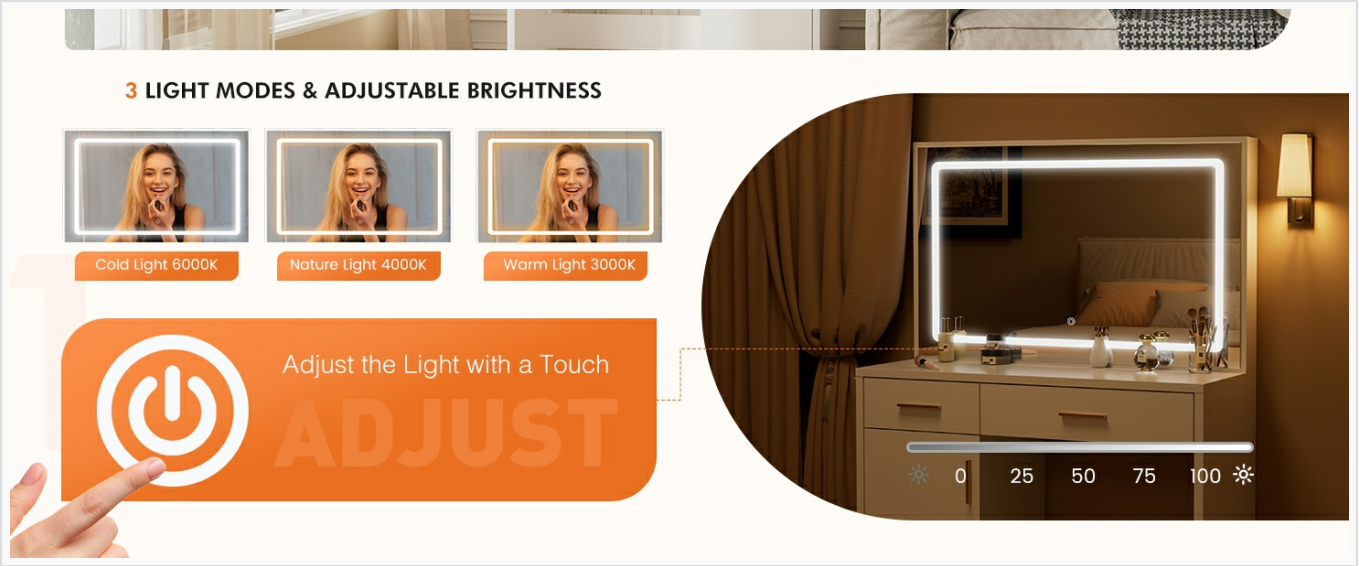

Image: The LED mirror displaying its three adjustable light color temperatures and touch control interface.

Charging Station

The vanity desk includes a built-in charging station with 2 AC outlets, 1 USB port, and 1 Type-C port.

- Plug the vanity's main power cord into a standard wall outlet.
- Connect your electronic devices to the available AC, USB, or Type-C ports for charging.



Image: The integrated power safety device with multiple charging ports for various electronic devices.

Maintenance

- **Cleaning:** Wipe surfaces with a soft, damp cloth. Avoid harsh chemicals or abrasive cleaners. For the mirror, use a glass cleaner and a lint-free cloth.
- **Dusting:** Regularly dust all surfaces to prevent buildup.
- **Hardware:** Periodically check all screws and fasteners to ensure they remain tight. Re-tighten if necessary.
- **Electrical Components:** Ensure the charging station and LED mirror wiring are free from damage. Do not attempt to repair electrical components yourself.

Troubleshooting

- **Lights Not Working:**
  - Check if the vanity's main power cord is securely plugged into a working wall outlet.
  - Ensure all LED bulb connections are secure and wires are correctly matched.
  - Verify the touch sensor is clean and unobstructed.
- **Charging Station Not Functioning:**
  - Confirm the vanity's main power cord is plugged in.
  - Test the charging station with a different device to rule out device-specific issues.
  - Check for any visible damage to the charging station unit or its wiring.
- **Drawers Stick or Don't Close Properly:**
  - Ensure the drawer slides are correctly installed and aligned.
  - Check for any obstructions within the drawer or on the slides.
  - Verify that the drawer box itself is assembled squarely.
- **Vanity Wobbles:**
  - Ensure all assembly screws are fully tightened.
  - Verify the vanity is placed on a flat, level surface.
  - Confirm the anti-rollover device is properly installed and secured to the wall.

Specifications

Feature	Detail
Model Number	SW-SZT
Dimensions (D x W x H)	15.67" x 35.43" x 54.76" (39.8 cm x 89.9 cm x 139.1 cm)
Mirror Size (W x H)	35.4" (89.9 cm) with 29.06" x 20.87" (73.8 cm x 53 cm) LED illuminated area
Weight	74.1 lbs (33.6 kg)
Material	Wood (MDF), Glass
LED Lighting	3 Color Modes (6000K, 4000K, 3000K), Adjustable Brightness
Charging Station	2 AC Outlets, 1 USB Port, 1 Type-C Port
Power Cord Length	4.92 FT (1.5 m)
Storage	2 Drawers, 1 Large Cabinet with adjustable shelf, Side Hair Dryer Hook



Image: Detailed dimensions and size information for the vanity desk components.

Warranty Information

Sweetcrispy products are manufactured with quality and durability in mind. This product is covered by a limited warranty against manufacturing defects. Please retain your proof of purchase for warranty claims. For specific warranty terms and conditions, refer to the product packaging or contact customer support.

Customer Support

If you have any questions, require assistance with assembly, or need to report a missing/damaged part, please contact Sweetcrispy customer support. Our team is available to help you.

- **Online Support:** Visit the official Sweetcrispy website for FAQs and support resources.
- **Email:** Refer to your purchase documentation for direct email support.

© 2025 Sweetcrispy. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0FPCJ7FL3

More documents and user manuals: **https://manuals.plus/**