



## Contents [ [hide](#) ]

- [1 LASER TECH K30 30W Optical Power Laser Module](#)
- [2 PRODUCT INTRODUCTION](#)
- [3 PRODUCT DESCRIPTION](#)
- [4 FAQs](#)
- [5 Documents / Resources](#)
  - [5.1 References](#)



## LASER TECH K30 30W Optical Power Laser Module



## PRODUCT INTRODUCTION


Model:	K30
Optical power:	28-32W
Input:	24V5A
Wavelength:	450nm ( $\pm 10$ nm)
Focus length:	40mm
Air assistance:	Built-in airway
Power adjustable:	TTL/PWM
PWM modulation:	0/3-12V, 0-5kHz
Fan speed:	9000rpm
Operating temperature:	0-60°C
Interface:	2EDG-3.81
Cable:	3PIN, 80cm
Material:	Aluminum & Copper
Module weight:	710g
Application:	Engraving & Cutting

**Outline dimension (Unit: mm)**






Laser module

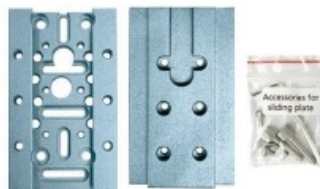

Sliding plate



2mm L-wrench

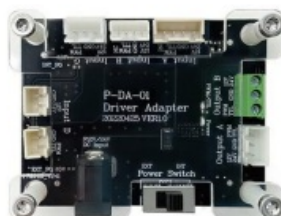

Driver adapter



24V5A power supply



Spare protective lens



1.5m Air tubex1





80cm Input cable




60cm Adapter cable

## PRODUCT DESCRIPTION

### Overview

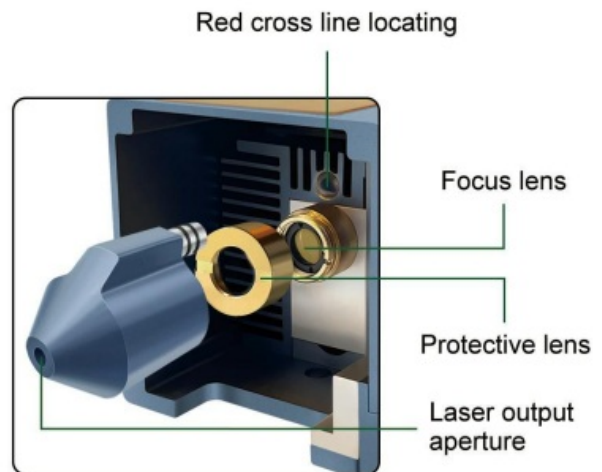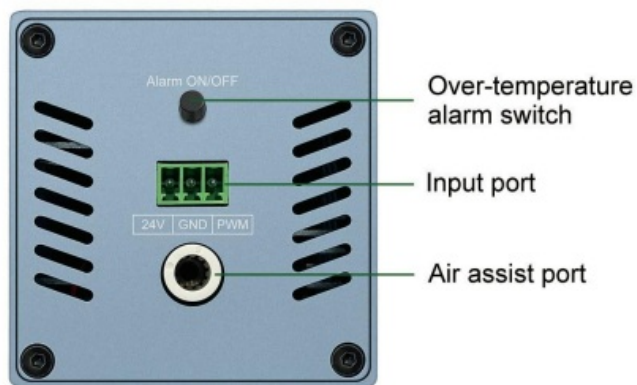

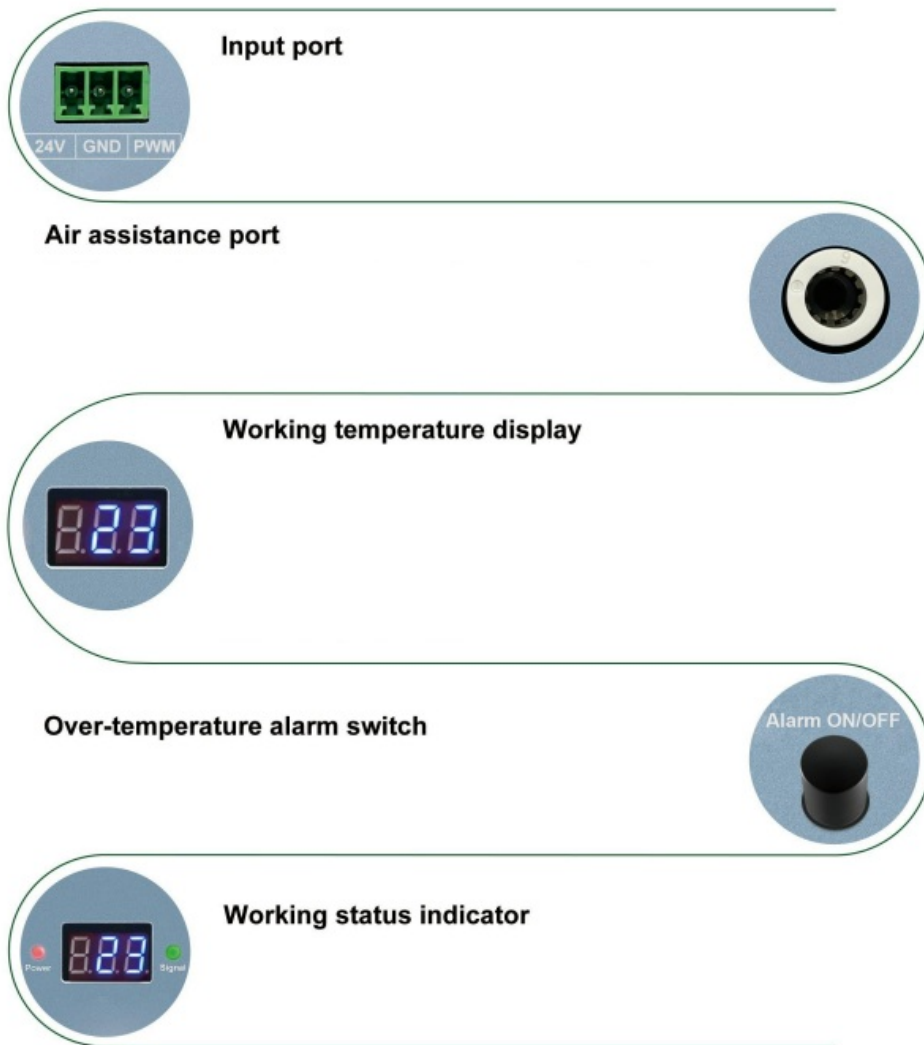

## Input port

Use 2EDG3.81 pluggable connector.

- VCC (24V5A DC)
- GND
- TTL/PWM in (0-5kHz)

## Air assistance port

Built-in air assist to get clean-cut edges and improve cutting performance.

## Air pump suggestion:

- Air pressure and capacity:  $\geq 0.027\text{kPa}$ , 27L/min
- Air tube: outer diameter 6mm and inner diameter  $\geq 4\text{mm}$

## Working temperature display

The output power stability and life time of laser module has strong relationship with working temperature of laser diode. K30 built-in a thermistor at the highest temperature point near the laser diode, the operating temperature of the diode can be displayed on the digital tube in real-time.

- We suggest the working temperature of the laser module is controlled below 55° C and the working environmental temperature below 35°C to get good power stability and durability.

### **Over-temperature alarm switch**


When the working temperature of the laser module is higher than 55° C, the buzzer will sound an alarm.

### **Working status indicator**

- Power indicator: it is red when power supply is connected.
- Signal indicator: it is green when signal is received.


### **+ Red cross line locating**

Help you to place the material to the position correctly.

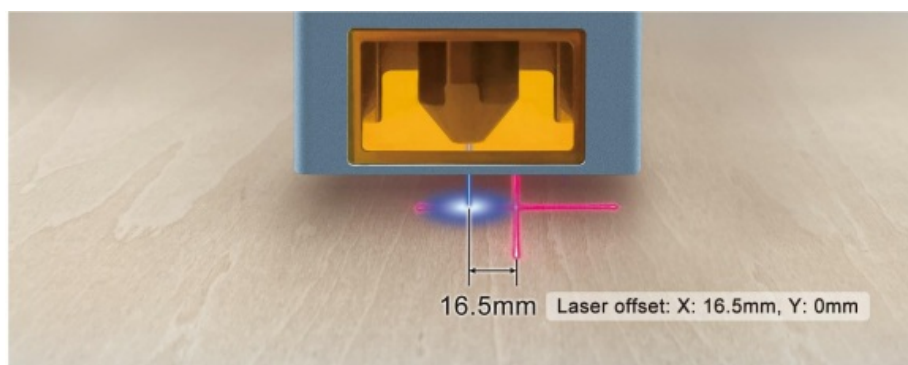


### **LightBurn settings**



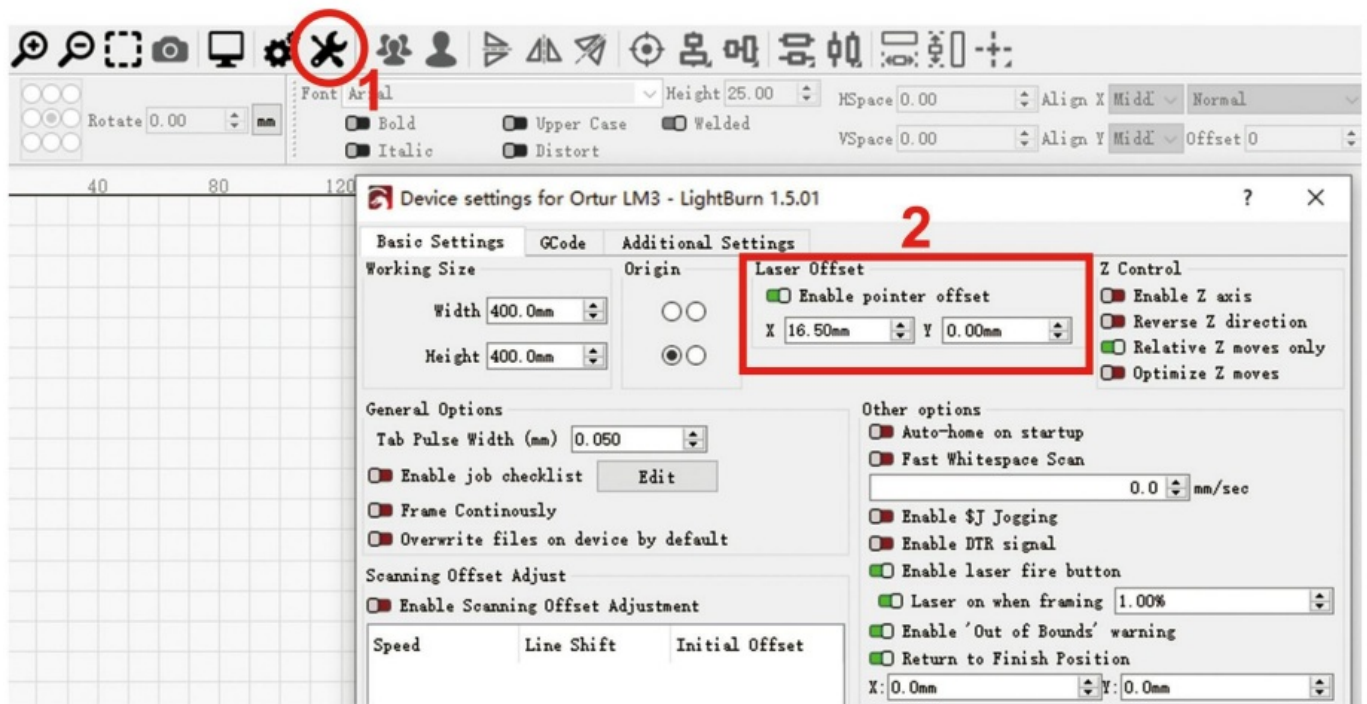

## Driver adapter (Model: P-DA-01)

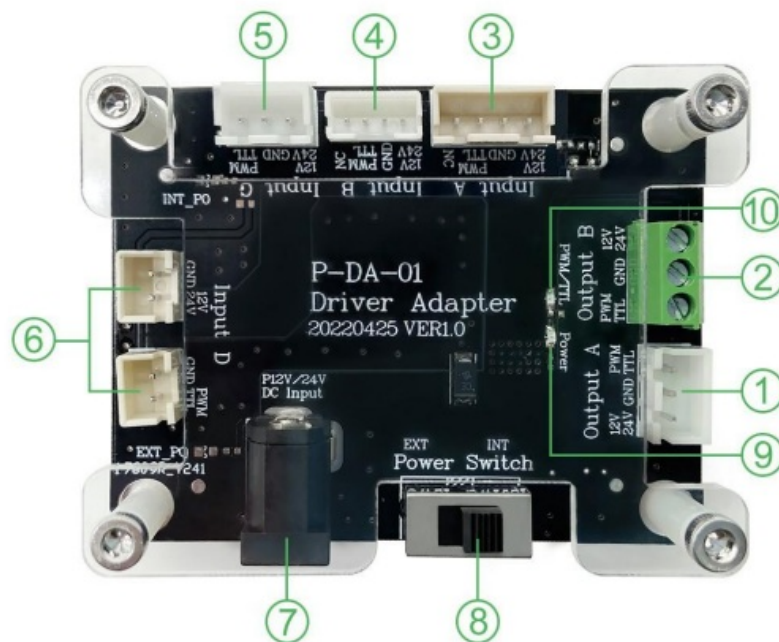

1 Output A: 3PIN connector	2 Output B: 3PIN connector
3 Input A: 4PIN connector	4 Input B: 4PIN connector
3 Input C: 3PIN connector	5 Input D: 2PIN connector
6 DC Input: 12V or 24V power adapter	



7 Power Switch: • EXT External power supply  
internal power supply


• INT i

8 Power indicator: It is red when the power cable is connected correctly.

9 TTL/PWM indicator: It is green when the TTL/PWM cable is connected correctly.

## Sliding plate

Multiple holes bring you widely installation compatibility.

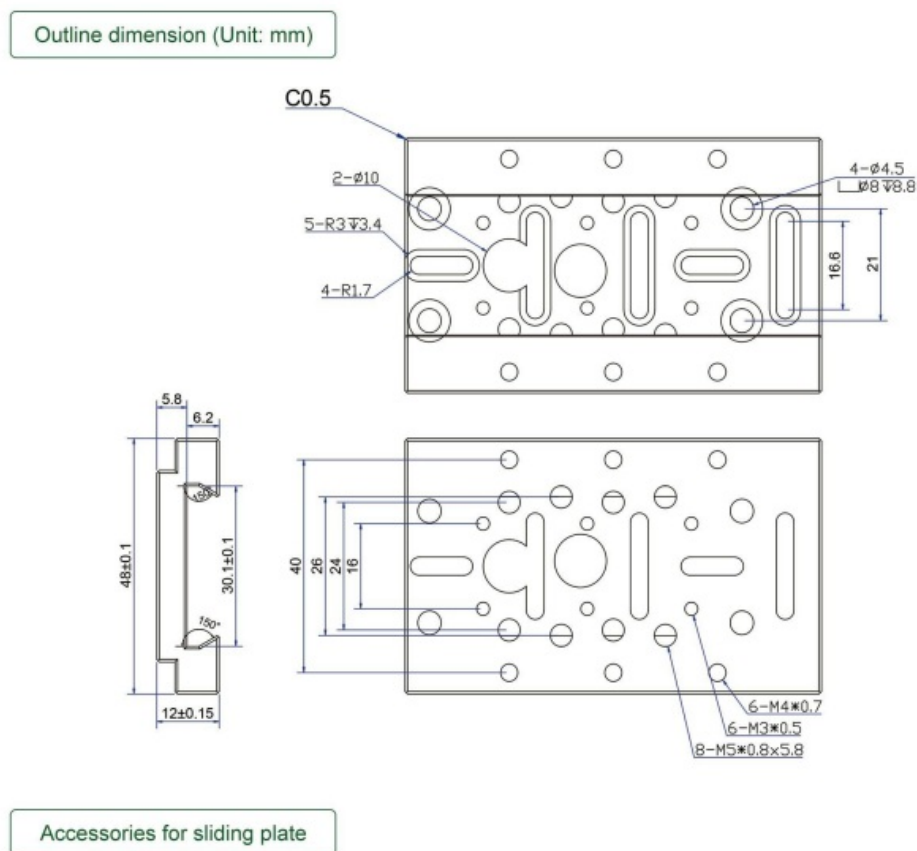

M3x6 Fasten screw\*4



M4x20 Fasten screw\*2



2.5mm L-wrench

## Installation for sliding plate



### ≡ PIN definition



80cm Input cable



60cm Adapter cable

Yellow wire: PWM

Black wire: GND

Red wire: Power (24V)


## CONNECTION DESCRIPTION

Please check whether the laser module is compatible with your engraving machine before connection.

- A. Check the voltage parameter of your engraving machine. Please ensure your engraving machine can provide at least 24V SA power supply.
- B. Check the port of the main control board on your engraving machine. Please find the PWM port, GND port and VCC port on the main board of your engraving machine. Then connect this laser module to the main board accordingly.

- "A" & "B" are both compatible.

Connect the laser module to the main board of your engraving machine directly.

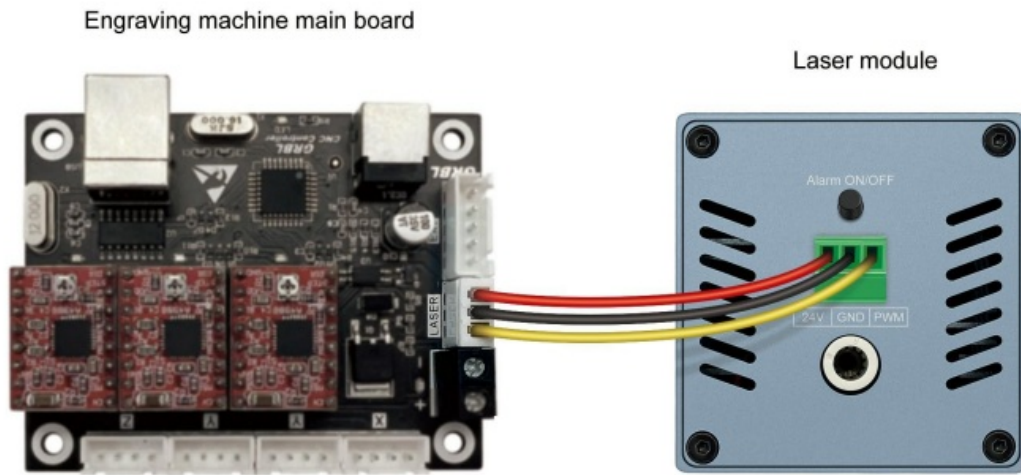


Reference picture

**Only voltage is not matched.**

The voltage parameter of your machine are not matched to the module.

Laser Module	Machine	Solutions
24V	12V	Driver Adapter + 24V Power Supply
	24V	Plug and Play

- Step1 Connect the cable of your engraving machine to the corresponding input connector on P-DA-01.
- Step2 Connect the cable of the laser module to the Output A connector on P-DA-01.
- Step3 Connect the 24V power adapter to the DC Input connector on P-DA-01. Push the switch to EXT position and the power is provided by external power adapter.

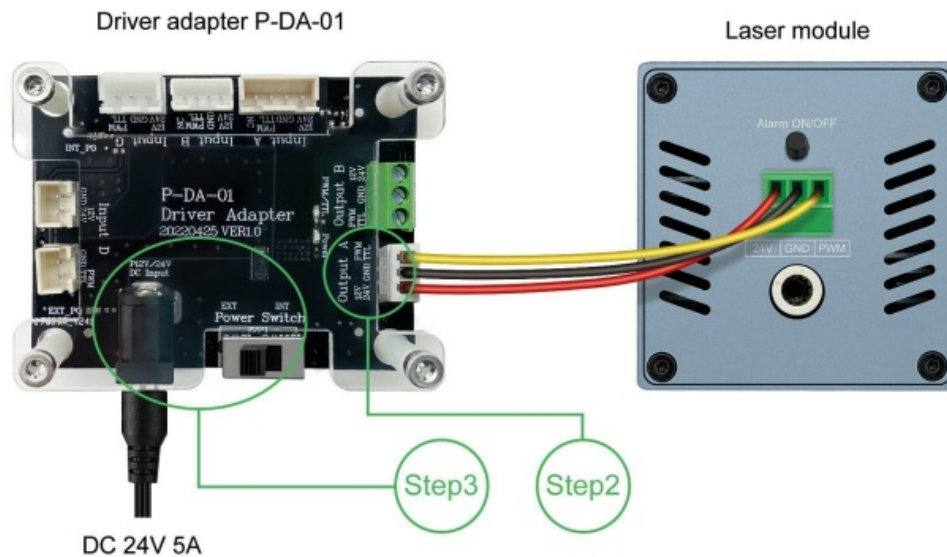

Reference picture

**Only control board pin definition is not matched.**

**Situation 1:** The definition of connector on the engraving machine main board is not pin-to-pin.

- Please rearrange the wire sequence of the cable to make each wire is well matched with the pin definition on the engraving machine main board.



Red wire and yellow wire connection error




Red wire and yellow wire connection correctly

**Situation 2:** Please use P-DA-01 if the main board of your engraving machine is not 3pin, such as 2pin.

Laser Module	Machine	Solutions
3PIN	2PIN	Driver Adapter
	Other pins	Driver Adapter

- **step1** Connect the cable of the your engraving machine to the corresponding input connector on P-DA-01.
- **Step2** Connect the cable of the laser module to the Output A connector on P-DA-01.

### Engraving machine main board

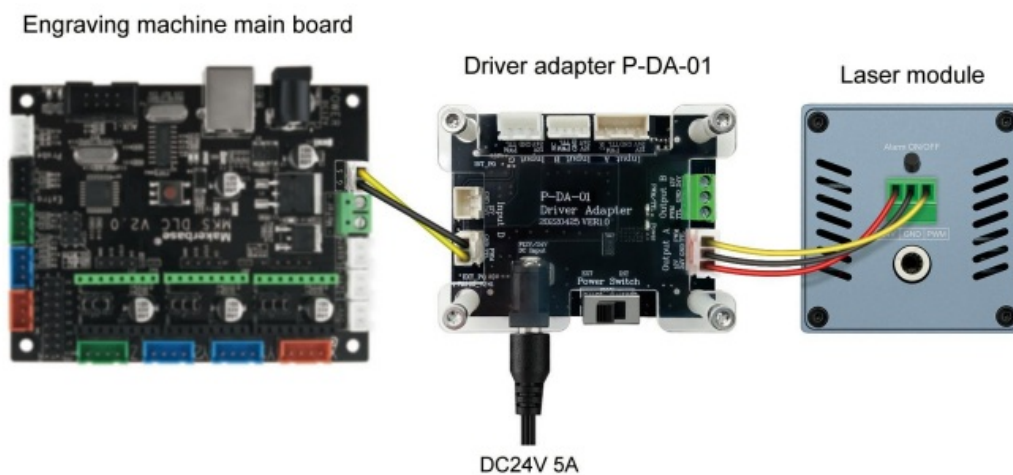

Reference picture

### FOCUS REFERENCE SETTINGS

The focal length of the K30 laser module is 40mm .

### For cutting

- Please make the focus locate lower than the cutting material surface according to the following.

### Reference settings for cutting




Fixed focus lever usage reference	
Material thickness	Fixed focus lever
< 5mm	0mm
5mm	2mm
6mm	3mm
8mm	3mm
10mm	4mm
12mm	5mm
15mm	6mm
≥ 20mm	7mm



## For engraving

- Please make the focus locate on the engraving material surface.

## Reference settings for engraving

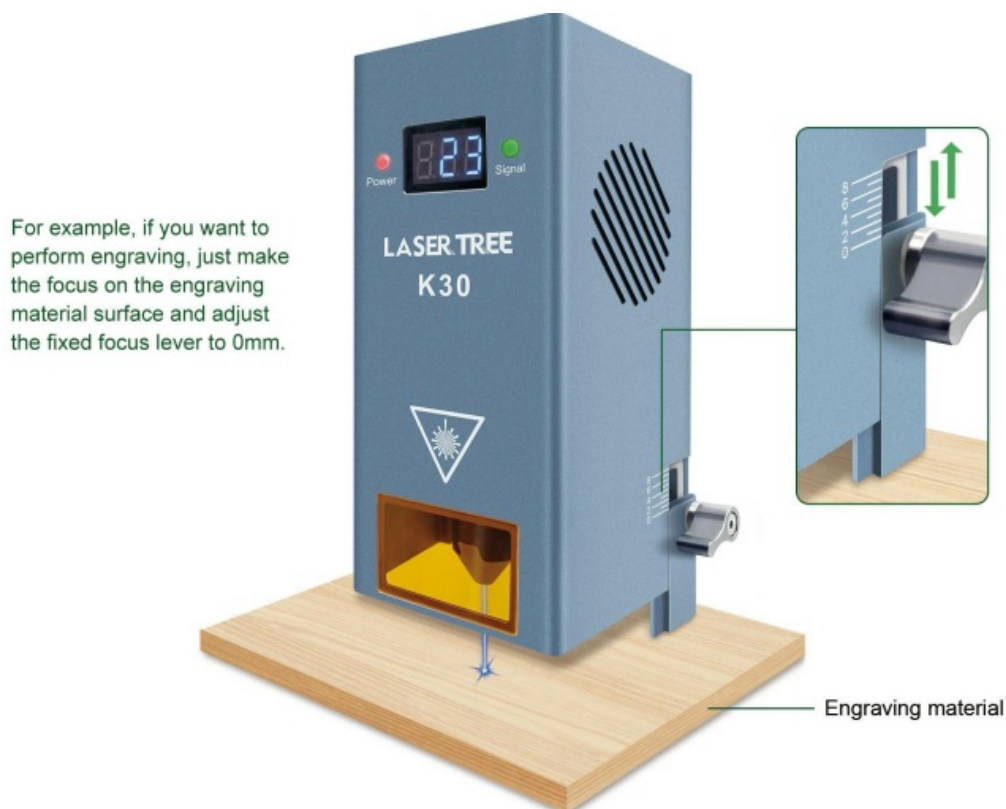

## PRECAUTIONS

- Laser may cause damage to your skin. Please do not expose your skin directly to the laser.
- Please wear laser goggles to protect your eyes when you use this laser module.
- Please ensure that the air pump is turned on before you start cutting. If not, the smoke will contaminate the lens.
- This laser module doesn't support hot plug. Hot plug may cause damage to the laser module.

## **MAINTENANCE**

- When the laser module is not used for a long time, please ensure that the lens is not polluted by dust.
- When you replace the air nozzle, please ensure that your operation will not pollute the lens. Finger prints or dust on the lens will weaken the output power of the laser module, or even damage the lens.
- When you find the cutting ability of laser module decreased, the lens might be not clean. Please use a clean alcohol swab to clean it according to the following figure.

For more information about maintenance, please contact us at [lasertree@micost-optotech.com](mailto:lasertree@micost-optotech.com).





Enjoy pleasure of DIY

## FAQS

### What materials can the LASER TECH K30 30W laser module cut or engrave?

The K30 30W laser module is capable of cutting through materials like plywood, acrylic, leather, and certain plastics. It can also engrave on wood, glass (with coating), metal (with coating or anodized), and ceramics.


### Is the LASER TECH K30 compatible with all CNC or laser engraving machines?

The module is generally compatible with most GRBL-based CNC and laser machines, but users should verify voltage input and mounting options. Always consult the manufacturer's documentation for integration requirements.

### Does the K30 laser module come with safety features?

Yes, the LASER TECH K30 often includes built-in cooling (typically a fan and heat sink) and overheat protection. However, users must wear appropriate laser safety goggles and operate it in a well-ventilated area.

# Documents / Resources


	<a href="#">LASER TECH K30 30W Optical Power Laser Module [pdf]</a> User Manual K30, K30 30W Optical Power Laser Module, 30W Optical Power Laser Module, Optical Power Laser Module, Power Laser Module, Laser Module , Module
---	--

## References

- [User Manual](#)

 LASER

TECH

 30W Optical Power Laser Module, K30, K30 30W Optical Power Laser Module, Laser Module, LASER TECH, Module, Optical Power Laser Module, Power Laser Module

---

## Leave a comment

Your email address will not be published. Required fields are marked \*

Comment \*

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

**Post Comment**

**Search:**

e.g. whirlpool wrf535swhz

**Search**

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.