


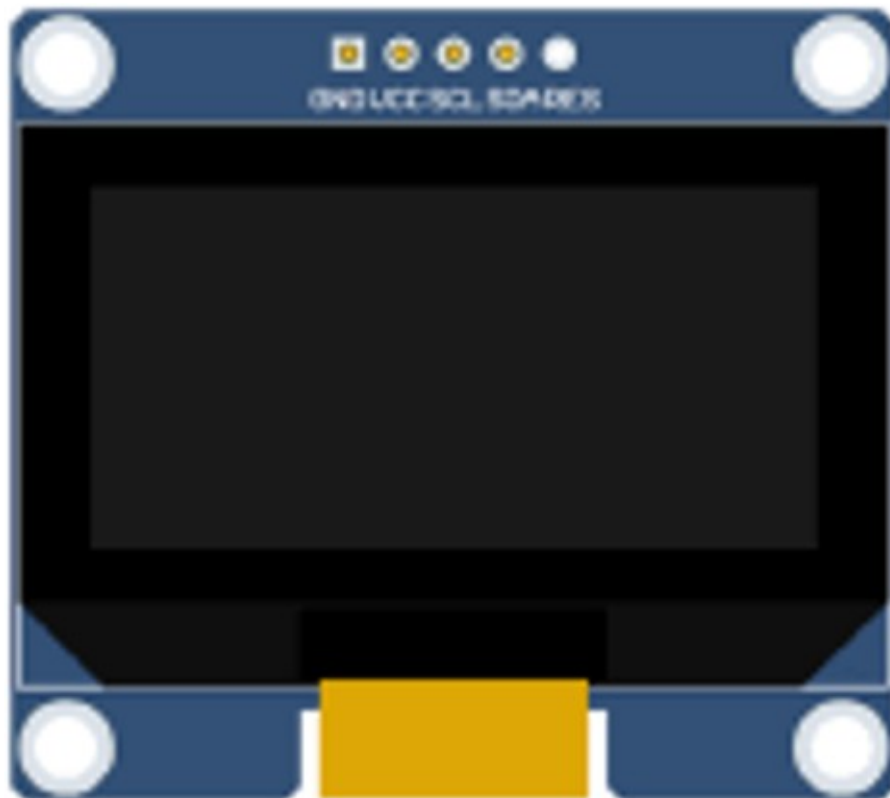
## LCD wiki MC154GX 1.54inch IIC OLED Module User Manual

[Home](#) » [LCD wiki](#) » LCD wiki MC154GX 1.54inch IIC OLED Module User Manual 

# LCD wiki

LCDWIKI

1.54inch OLED SSD1309 IIC Module MC154GX User Manual  
CR2022-MI4601



1.54inch OLED SSD1309 IIC Module  
MC154GW&MC154GB  
User Manual

## Contents

- [1 Introduction to OLED](#)
- [2 Product Description](#)
- [3 Product Features](#)
- [4 Product Parameters](#)
- [5 Interface Description](#)
- [6 Hardware Configuration](#)
- [7 Working principle](#)
- [8 Instructions for use](#)
- [9 Software Description](#)
- [10 Common software](#)
- [11 Documents / Resources](#)
  - [11.1 References](#)

## Introduction to OLED

OLED is an Organic Light-Emitting Diode (OLED). OLED display technology has the advantages of self-illumination, wide viewing angle, almost infinite contrast, low power consumption, high reaction speed, flexible panel, wide temperature range, simple structure and process, etc. A generation of flat panel display emerging application technology.

OLED display is different from traditional LCD display, it can self-illuminate, so no backlight is needed, which makes OLED display

The display is thinner than the LCD display and has a better display.

## Product Description

The OLED module has a display size of 1.54" and has a 128×64 resolution for black and white or black and blue. It adopts IIC communication mode and the internal driver IC is SH1106.


## Product Features

- 1.54 inch OLED screen with black and white or black and blue color display
- 128×64 resolution for clear display and high contrast
- Large viewing angle: greater than 160° (one screen with the largest viewing angle in the display)
- Wide voltage supply (3V~5V), compatible with 3.3V and 5V logic levels, no level shifting chip required
- With IIC bus, only a few IOs can be used to light up the display
- Ultra-low power consumption: normal display is only 0.06W (far below the TFT display)
- Military-grade process standards, long-term stable work
- Provides a rich sample program for STM32, C51, Arduino platforms
- Provide underlying driver technical support


## Product Parameters

| Name                           | Description              |
|--------------------------------|--------------------------|
| Display Color                  | Black white / black blue |
| SKU                            | MC154GW<br>MC154GB       |
| Screen Size                    | 1.54(inch)               |
| Type                           | OLED                     |
| Driver IC                      | SSD309                   |
| Resolution                     | 128*64(Pixel)            |
| Module Interface               | IIC interface            |
| Active Area                    | 35.052×17.516(mm)        |
| Touch Screen type              | No touch screen          |
| Touch IC                       | No touch IC              |
| Module PCB Size                | 42.40×38.00(mm)          |
| Visual angle                   | >160°                    |
| Operating Temperature          | -20℃~60℃                 |
| Storage Temperature            | -30℃~70℃                 |
| Operating Voltage              | 3.3V / 5V                |
| Power Consumption              | TDB                      |
| Product Weight(With packaging) | 12(g)                    |

## Interface Description

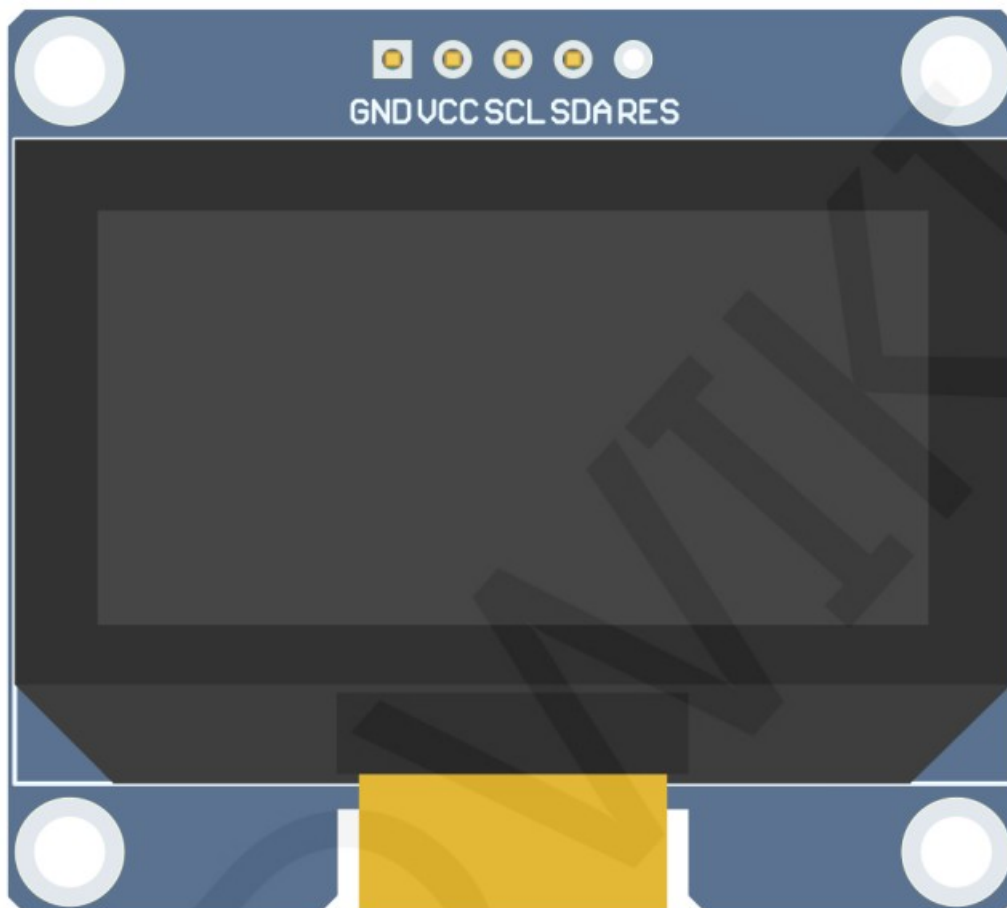

Picture 1. Module pin silk screen

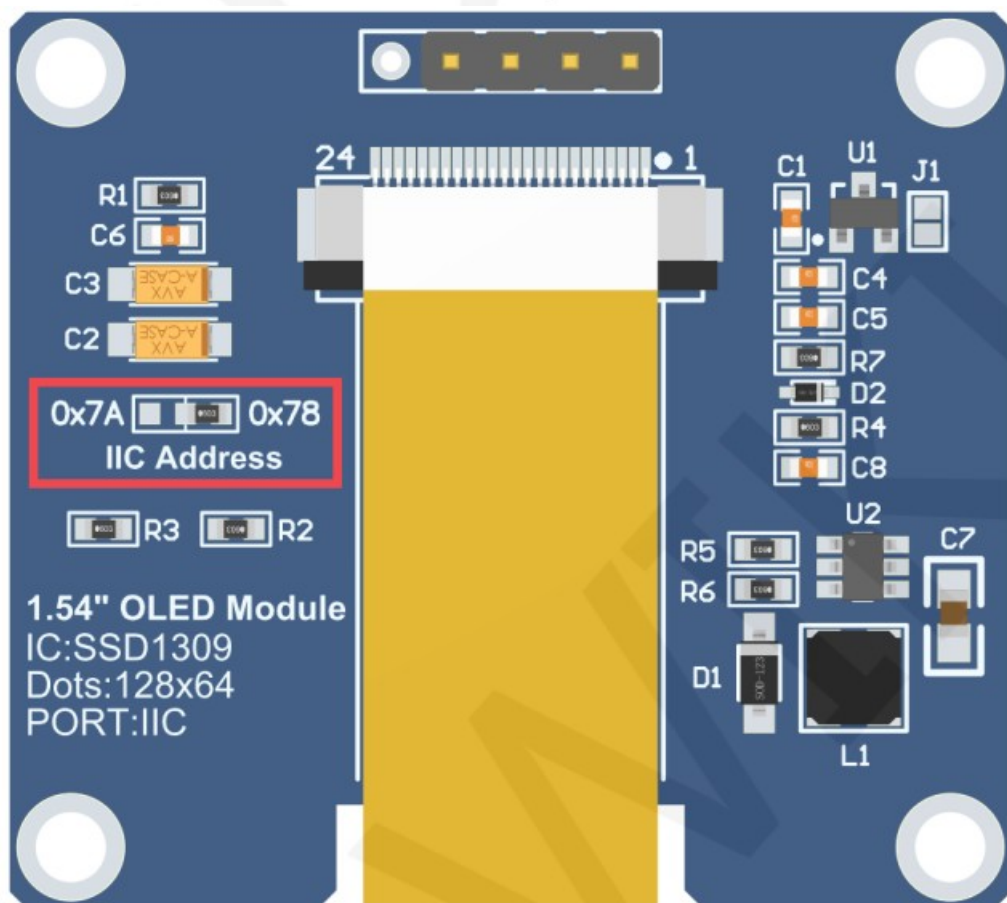

Picture 2. Rear view of the module

NOTE:

1. This module supports IIC slave device address switching (shown in red box in Picture 2), as follows:
  - A. Solder the 0x78 side resistance, disconnect the 0x7A side, then select the 0x78 slave address (default);
  - B. Solder the 0x7A side resistance, disconnect the 0x78 side, then select the 0x7A slave address;
2. The hardware switches the IIC from the set address, and the software also needs to be modified accordingly.  
For the specific modification method, see the following IIC slave device address modification instructions.

| Number | Module Pin | Pin description  |
|--------|------------|--|
| 1      | GND        | OLED power ground  |
| 2      | VCC        | OLED power positive (3.3V~5V)  |
| 3      | SCL        | OLED IIC bus clock signal  |
| 4      | SDA        | OLED IIC bus data signal   |
| 5      | RES        | OLED reset signal, low level reset (The module has a reset circuit, which can be powered on and reset) |

## Hardware Configuration

The hardware circuit of this module is composed of five parts: OLED display control circuit, OLED boost circuit, IIC slave device address selection circuit, pin array interface, and power supply voltage stabilizing circuit.

OLED display control circuit is mainly used to control OLED display, including chip selection, reset, data and command transmission control.

The IIC slave address selection control circuit is used to select different slave addresses.

The OLED boosting circuit is used to boost an input voltage to an OLED light emitting voltage.

The pin array interface is used for external connection of the main control development board.

The power supply voltage stabilizing circuit is used for 3.3V voltage stabilizing power supply.

The OLED module adopts IIC communication mode, and the hardware is configured with two pins: SCL (IIC data pin) and SDA (IIC clock pin). The IIC data transmission can be completed by controlling these two pins according to the IIC working timing.

## Working principle

### 1. Introduction to SSD1309 Controller

The SSD1309 is an OLED/PLED controller that supports a maximum resolution of 128\*64 and a 1024-byte GRAM. Support 8-bit 6800 and 8-bit 8080 parallel port data bus, also supports 3-wire and 4-wire SPI serial bus and I2C bus. Since parallel control requires a large number of IO ports, the most commonly used are the SPI serial bus and the I2C bus. It supports vertical scrolling and can be used in small portable devices such as mobile phones, MP3 players and more.


The SSD1309 controller uses 1 bit to control a pixel display, so each pixel can only display black and white or black and blue. The displayed RAM is divided into 8 pages, with 8 lines per page and 128 pixels per line. When setting pixel data, you need to specify the page address first, and then specify the column low address and column height address respectively, so set 8 pixels in the vertical direction at the same time. In order to be able to flexibly control the pixel points at any position, the software first sets a global one-dimensional array of the same size as the display RAM, first maps the pixel point data to the global array, and the process uses the OR or the operation to ensure that the global array is written before. The data is not corrupted, and the data of the global array is then written to the GRAM so that it can be displayed through the OLED.

### 2. Introduction to IIC Communication Protocol

The process of writing data on the IIC bus is shown in the following figure:





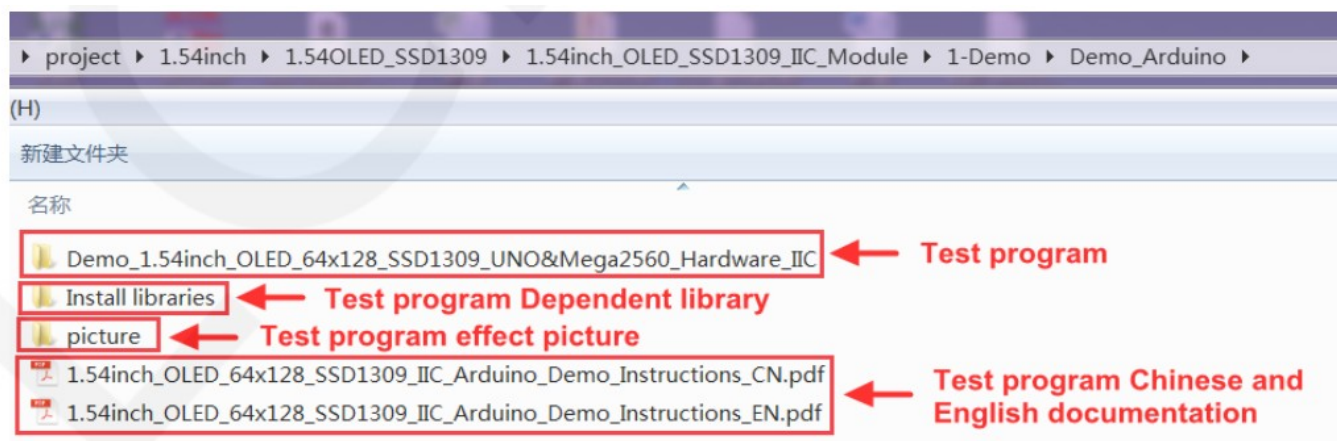

C. Open the selected sample project, compile and download.

The specific operation methods for the Arduino test program relying on library copy, compile and download are as follows:

[http://www.lcdwiki.com/res/PublicFile/Arduino\\_IDE\\_Use\\_Illustration\\_EN.pdf](http://www.lcdwiki.com/res/PublicFile/Arduino_IDE_Use_Illustration_EN.pdf)

D. If the OLED module displays characters and graphics normally, the program runs Successfully;

## 2. STM32 instructions

### Wiring instructions:

See the interface description for pin assignments.

| Number | Module Pin | Corresponding to the STM32F103C8T6 development board wiring pin |
|--------|------------|---|
| 1      | GND        | GND   |
| 2      | VCC        | 5V/3.3V   |
| 3      | SCL        | PA5   |
| 4      | SDA        | PA7   |
| 5      | RES        | No need to connect  |

### STM32F103RCT6 microcontroller test program wiring instructions

| Number | Module Pin | Corresponding to the MiniSTM32 development board wiring pin |
|--------|------------|---|
| 1      | GND        | GND   |
| 2      | VCC        | 5V/3.3V   |
| 3      | SCL        | PB13  |
| 4      | SDA        | PB15  |
| 5      | RES        | No need to connect  |

### STM32F103ZET6 microcontroller test program wiring instructions



| Number | Module Pin | Corresponding to the Elite STM32 development board wiring pin |
|--------|------------|---|
| 1      | GND        | GND   |
| 2      | VCC        | 5V/3.3V   |
| 3      | SCL        | PB13  |
| 4      | SDA        | PB15  |
| 5      | RES        | No need to connect  |

#### STM32F407ZGT6 microcontroller test program wiring instructions

| Number | Module Pin | Corresponding to the Explorer STM32F4 development board wiring pin |
|--------|------------|--|
| 1      | GND        | GND  |
| 2      | VCC        | 5V/3.3V  |
| 3      | SCL        | PB3  |
| 4      | SDA        | PB5  |
| 5      | RES        | No need to connect   |


#### STM32F429IGT6 microcontroller test program wiring instructions

| Number | Module Pin | Corresponding to the Apollo STM32F4/F7 development board wiring pin |
|--------|------------|---|
| 1      | GND        | GND   |
| 2      | VCC        | 5V/3.3V   |
| 3      | SCL        | PF7   |
| 4      | SDA        | PF9   |
| 5      | RES        | No need to connect  |

#### Operating Steps

A. Connect the LCD module and the STM32 MCU according to the above wiring instructions, and power on;  
 B. Open the directory where the STM32 test program is located and select the example to be tested, as shown below:

(Please refer to the test program description document for test program description)

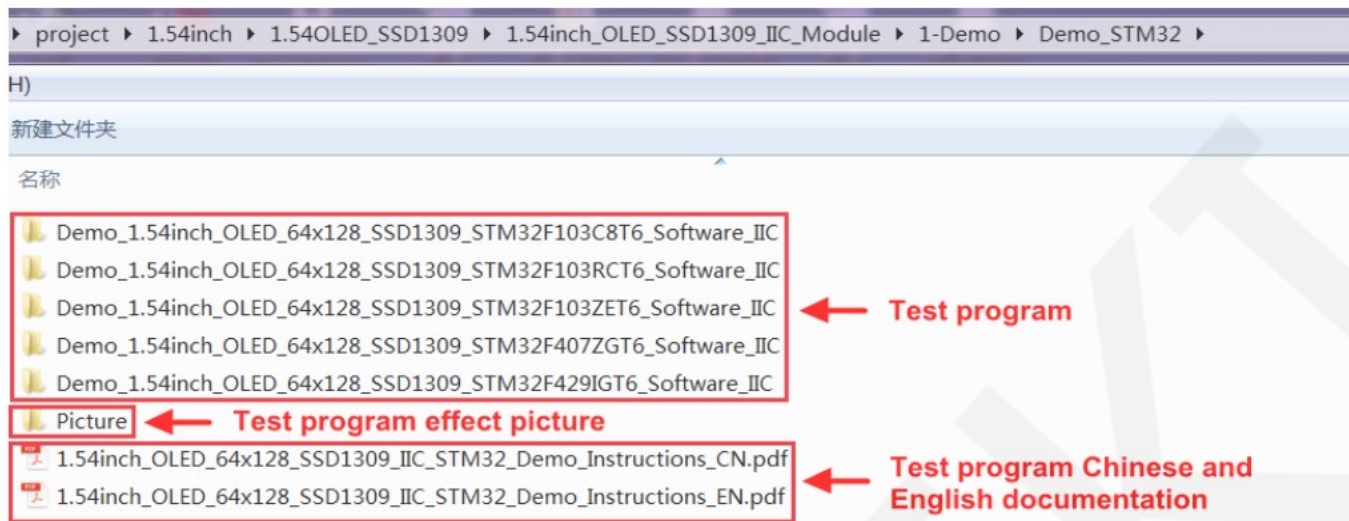

C. Open the selected test program project, compile and download; detailed description of the STM32 test program compilation and download can be found in the following document:

[http://www.lcdwiki.com/res/PublicFile/STM32\\_Keil\\_Use\\_Illustration\\_EN.pdf](http://www.lcdwiki.com/res/PublicFile/STM32_Keil_Use_Illustration_EN.pdf)

D. If the OLED module displays characters and graphics normally, the program runs successfully

### 3. C51 instructions

#### Wiring instructions:

See the interface description for pin assignments.

STC89C52RC and STC12C5A60S2 microcontroller test program wiring instructions


| Number | Module Pin | Corresponding to STC89/STC12 development board wiring pin |
|--------|------------|---|
| 1      | GND        | GND   |
| 2      | VCC        | 5V/3.3V   |
| 3      | SCL        | P17   |
| 4      | SDA        | P15   |
| 5      | RES        | No need to connect  |

### Operating Steps

A. Connect the LCD module and the C51 MCU according to the above wiring instructions, and power on;

B. Open the directory where the C51 test program is located and select the example to be tested, as shown below:

(Please refer to the test program description document for test program description)

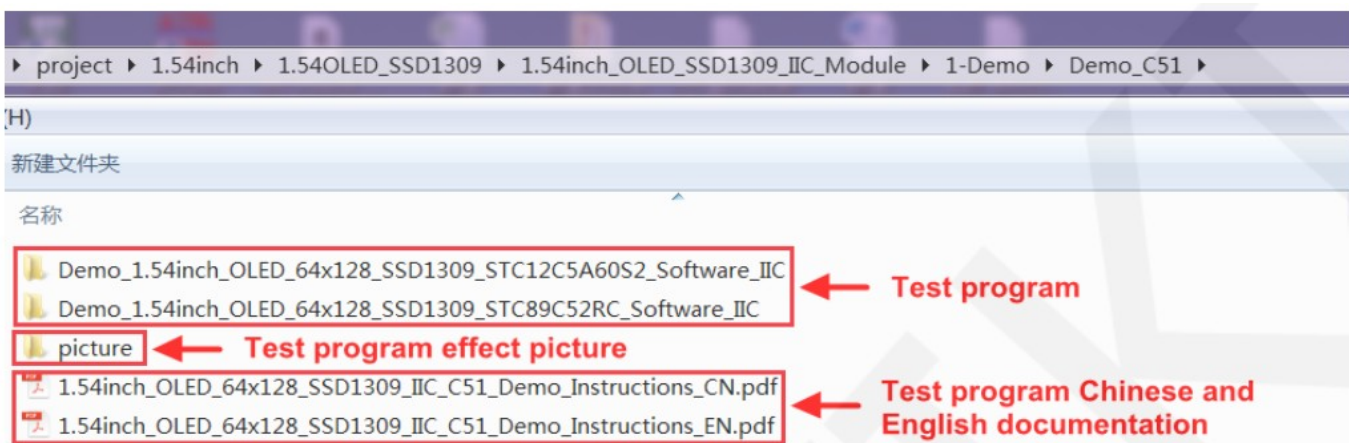

C. Open the selected test program project, compile and download;

detailed description of the C51 test program compilation and download can be found in the following document:

[http://www.lcdwiki.com/res/PublicFile/C51\\_Keil%26stc-isp\\_Use\\_Illustration\\_EN.pdf](http://www.lcdwiki.com/res/PublicFile/C51_Keil%26stc-isp_Use_Illustration_EN.pdf)

D. If the OLED module displays characters and graphics normally, the program runs successfully;

#### 4. RaspberryPi instructions

##### Wiring instructions:

See the interface description for pin assignments.

##### NOTE:

Physical pin refers to the GPIO pin code of the RaspBerry Pi development board.

BCM encoding refers to the GPIO pin coding when using the BCM2835 GPIO library.

WiringPi coding refers to the GPIO pin coding when using the wiringPi GPIO library.

Which GPIO library is used in the code, the pin definition needs to use the corresponding GPIO library code, see Picture 1 GPIO map table for details.

| wiringPi<br>编码 | BCM<br>编码 | 功能名     | 物理引脚<br>BOARD编码 |    | 功能名     | BCM<br>编码 | wiringPi<br>编码 |
|----------------|-----------|---------|-----------------|----|---------|-----------|----------------|
|                |           | 3.3V    | 1               | 2  | 5V      |           |                |
| 8              | 2         | SDA.1   | 3               | 4  | 5V      |           |                |
| 9              | 3         | SCL.1   | 5               | 6  | GND     |           |                |
| 7              | 4         | GPIO.7  | 7               | 8  | TXD     | 14        | 15             |
|                |           | GND     | 9               | 10 | RXD     | 15        | 16             |
| 0              | 17        | GPIO.0  | 11              | 12 | GPIO.1  | 18        | 1              |
| 2              | 27        | GPIO.2  | 13              | 14 | GND     |           |                |
| 3              | 22        | GPIO.3  | 15              | 16 | GPIO.4  | 23        | 4              |
|                |           | 3.3V    | 17              | 18 | GPIO.5  | 24        | 5              |
| 12             | 10        | MOSI    | 19              | 20 | GND     |           |                |
| 13             | 9         | MISO    | 21              | 22 | GPIO.6  | 25        | 6              |
| 14             | 11        | SCLK    | 23              | 24 | CE0     | 8         | 10             |
|                |           | GND     | 25              | 26 | CE1     | 7         | 11             |
| 30             | 0         | SDA.0   | 27              | 28 | SCL.0   | 1         | 31             |
| 21             | 5         | GPIO.21 | 29              | 30 | GND     |           |                |
| 22             | 6         | GPIO.22 | 31              | 32 | GPIO.26 | 12        | 26             |
| 23             | 13        | GPIO.23 | 33              | 34 | GND     |           |                |
| 24             | 19        | GPIO.24 | 35              | 36 | GPIO.27 | 16        | 27             |
| 25             | 26        | GPIO.25 | 37              | 38 | GPIO.28 | 20        | 28             |
|                |           | GND     | 39              | 40 | GPIO.29 | 21        | 29             |

Raspberry Pi test program wiring instructions

| Number | Module Pin | Corresponding to development board wiring pin       |
|--------|------------|---|
| 1      | GND        | GND (Physical pin 6,9,14,20,25,30,34,39)            |
| 2      | VCC        | 5V/3.3V<br>( Physical pin 1,2,4                     |
| 3      | SCL        | Physical pin 5<br>BCM coding 3<br>wiringPi coding 9 |
| 4      | SDA        | Physical pin 3<br>BCM coding 2<br>wiringPi coding 8 |

## Operating Steps

### A. open the IIC function of RaspberryPi

Log in to the RaspberryPi using a serial terminal tool (such as putty) and enter the following command: `sudo raspi-config`

Select Interfacing Options->I2C->YES

Start RaspberryPi's I2C kernel driver


### B. install the function library

For detailed installation methods of the bcm2835, wiringPi, and python function libraries of RaspberryPi, see the following documents:

[http://www.lcdwiki.com/res/PublicFile/Raspberrypi\\_Use\\_Illustration\\_EN.pdf](http://www.lcdwiki.com/res/PublicFile/Raspberrypi_Use_Illustration_EN.pdf)

### C. select the example that needs to be tested, as shown below:

(Please refer to the test program description document for test program description)

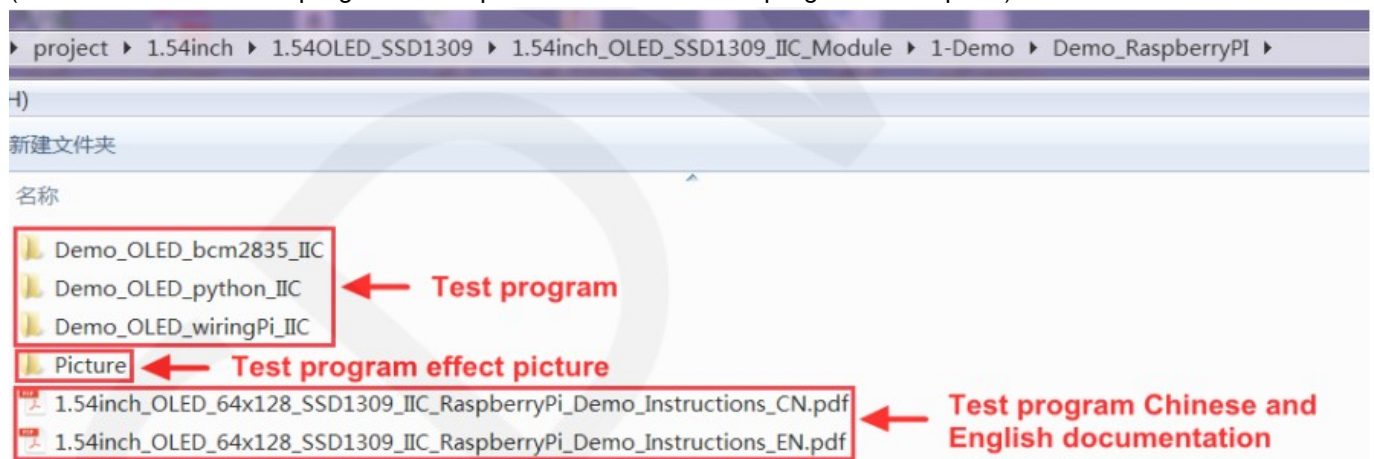

### D. bcm2835 instructions

a) Connect the OLED module to the RaspberryPi development board according to the above wiring

b) Copy the test program directory Demo\_OLED\_bcm2835\_IIC to RaspberryPi (can be copied via SD card or via FTP tool (such as FileZilla))

c) Run the following command to run the bcm2835 test program:

```
cd Demo_OLED_bcm2835_IIC
```

```
make sudo ./ 1.54_IIC_OLED
```

**As shown below:**



```

pi@raspberrypi:~/CS1 $
pi@raspberrypi:~/cs1 $ cd Demo_OLED_bcm2835_IIC/
pi@raspberrypi:~/cs1/Demo_OLED_bcm2835_IIC $ make
gcc -g -O0 -c /home/pi/cs1/Demo_OLED_bcm2835_IIC/source/src/test.c -o /home/pi/cs1/Demo_OLED_bcm2835_IIC/output/test.o
gcc -g -O0 -c /home/pi/cs1/Demo_OLED_bcm2835_IIC/source/src/gui.c -o /home/pi/cs1/Demo_OLED_bcm2835_IIC/output/gui.o
gcc -g -O0 -c /home/pi/cs1/Demo_OLED_bcm2835_IIC/source/src/main.c -o /home/pi/cs1/Demo_OLED_bcm2835_IIC/output/main.o
gcc -g -O0 -c /home/pi/cs1/Demo_OLED_bcm2835_IIC/source/src/delay.c -o /home/pi/cs1/Demo_OLED_bcm2835_IIC/output/delay.o
gcc -g -O0 -c /home/pi/cs1/Demo_OLED_bcm2835_IIC/source/src/oled.c -o /home/pi/cs1/Demo_OLED_bcm2835_IIC/output/oled.o
gcc -g -O0 -c /home/pi/cs1/Demo_OLED_bcm2835_IIC/source/src/iic.c -o /home/pi/cs1/Demo_OLED_bcm2835_IIC/output/iic.o
gcc -g -O0 /home/pi/cs1/Demo_OLED_bcm2835_IIC/output/test.o /home/pi/cs1/Demo_OLED_bcm2835_IIC/output/delay.o /home/pi/cs1/Demo_OLED_bcm2835_IIC/output/oled.o /home/pi/cs1/Demo_OLED_bcm2835_IIC/output/iic.o -o /home/pi/cs1/Demo_OLED_bcm2835_IIC/output/1.3_IIC_OLED
pi@raspberrypi:~/cs1/Demo_OLED_bcm2835_IIC $ sudo ./1.3_IIC_OLED

```

## E. wiringPi instructions

a) Connect the OLED module to the RaspberryPi development board according to the above wiring  
b) Copy the test program directory Demo\_OLED\_wiringPi\_IIC to RaspberryPi (can be copied via SD card or via FTP tool (such as FileZilla))

c) Run the following command to run the wiringPi test program:

```
cd Demo_OLED_wiringPi_IIC
```

```
make
```

```
sudo ./1.54_IIC_OLED
```

As shown below:

```

pi@raspberrypi:~/CS1 $
pi@raspberrypi:~/cs1 $ cd Demo_OLED_wiringPi_IIC/
pi@raspberrypi:~/cs1/Demo_OLED_wiringPi_IIC $ make
gcc -g -O0 -c /home/pi/cs1/Demo_OLED_wiringPi_IIC/source/src/test.c -o /home/pi/cs1/Demo_OLED_wiringPi_IIC/output/test.o
gcc -g -O0 -c /home/pi/cs1/Demo_OLED_wiringPi_IIC/source/src/gui.c -o /home/pi/cs1/Demo_OLED_wiringPi_IIC/output/gui.o
gcc -g -O0 -c /home/pi/cs1/Demo_OLED_wiringPi_IIC/source/src/main.c -o /home/pi/cs1/Demo_OLED_wiringPi_IIC/output/main.o
gcc -g -O0 -c /home/pi/cs1/Demo_OLED_wiringPi_IIC/source/src/delay.c -o /home/pi/cs1/Demo_OLED_wiringPi_IIC/output/delay.o
gcc -g -O0 -c /home/pi/cs1/Demo_OLED_wiringPi_IIC/source/src/oled.c -o /home/pi/cs1/Demo_OLED_wiringPi_IIC/output/oled.o
gcc -g -O0 -c /home/pi/cs1/Demo_OLED_wiringPi_IIC/source/src/iic.c -o /home/pi/cs1/Demo_OLED_wiringPi_IIC/output/iic.o
gcc -g -O0 /home/pi/cs1/Demo_OLED_wiringPi_IIC/output/test.o /home/pi/cs1/Demo_OLED_wiringPi_IIC/output/delay.o /home/pi/cs1/Demo_OLED_wiringPi_IIC/output/oled.o /home/pi/cs1/Demo_OLED_wiringPi_IIC/output/iic.o -o /home/pi/cs1/Demo_OLED_wiringPi_IIC/output/1.3_IIC_OLED
pi@raspberrypi:~/cs1/Demo_OLED_wiringPi_IIC $ sudo ./1.3_IIC_OLED

```

If you want to modify the IIC transfer rate, you need to add the following content to the /boot/config.txt file, then restart raspberryPi , i2c\_arm\_baudrate=2000000 (note that the comma is also required)

As shown below (the red box is the added content, the number 2000000 is the set rate, can be changed):

```
# Uncomment some or all of these to enable the optional hardware interfaces
dtparam=i2c_arm=on,i2c_arm_baudrate=2000000
```

## F. python instructions

a) The image processing library PIL needs to be installed before running the python test program. The specific installation method is as follows:

[http://www.lcdwiki.com/res/PublicFile/Python\\_Image\\_Library\\_Install\\_Illustration\\_EN.pdf](http://www.lcdwiki.com/res/PublicFile/Python_Image_Library_Install_Illustration_EN.pdf)

b) Connect the OLED module to the RaspberryPi development board as described above.

c) Copy the test program directory Demo\_OLED\_python\_IIC to RaspberryPi (either via SD card or via FTP tool (such as FileZilla))

d) Run the following command to run 3 python test programs separately:

```
cd Demo_OLED_python_IIC/source
```

```
sudo python show_graph.py
```

```
sudo python show_char.py
```

```
sudo python show_bmp.py
```

As shown below:

```

pi@raspberrypi:~ $ cd Demo_OLED_python_IIC/source/
pi@raspberrypi:~/Demo_OLED_python_IIC/source $ sudo python show_graph.py
pi@raspberrypi:~/Demo_OLED_python_IIC/source $ sudo python show_char.py
pi@raspberrypi:~/Demo_OLED_python_IIC/source $ sudo python show_bmp.py

```

## 5. MSP430 instructions

Wiring instructions:


See the interface description for pin assignments.

| Number | Module Pin | Corresponding to MSP430 development board wiring pin |
|--------|------------|--|
| 1      | GND        | GND  |
| 2      | VCC        | 5V/3.3V  |
| 3      | SCL        | P54  |
| 4      | SDA        | P53  |

### Operating Steps

A. Connect the LCD module and the MSP430 MCU according to the above wiring instructions, and power on;  
B. Open the directory where the MSP430 test program is located and select the example to be tested, as shown below:

(Please refer to the test program description document for test program description)

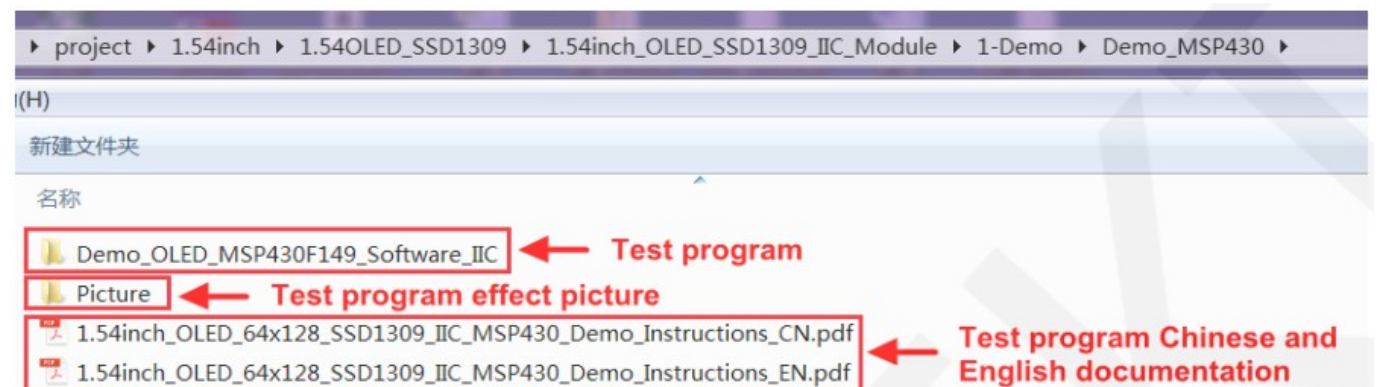

C. Open the selected test program project, compile and download;  
detailed description of the C51 test program compilation and download can be found in the following document:

[http://www.lcdwiki.com/res/PublicFile/IAR\\_IDE%26MspFet\\_Use\\_Illustration\\_EN.pdf](http://www.lcdwiki.com/res/PublicFile/IAR_IDE%26MspFet_Use_Illustration_EN.pdf)


D. If the OLED module displays characters and graphics normally, the program runs successfully;

## Software Description

### 1. Code Architecture

#### A. Arduino code architecture description

The code architecture is shown below

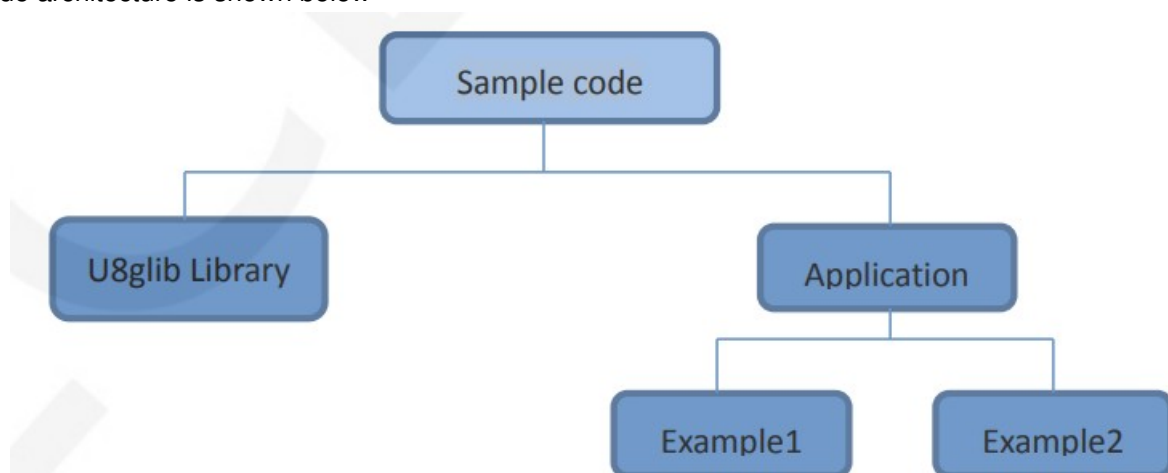

Arduino's test program code consists of two parts: the U8glib library and application code.


The U8glib library contains a variety of control IC configurations, mainly responsible for operating registers, including hardware module initialization, data and command transfer, pixel coordinates and color settings, display mode configuration, etc.

The application contains several test examples, each of which contains different test content. It uses the API

provided by the U8glib library, writes some test examples, and implements some aspects of the test function.

### B. C51 , STM32 and MSP430 code architecture description

The code architecture is shown below:

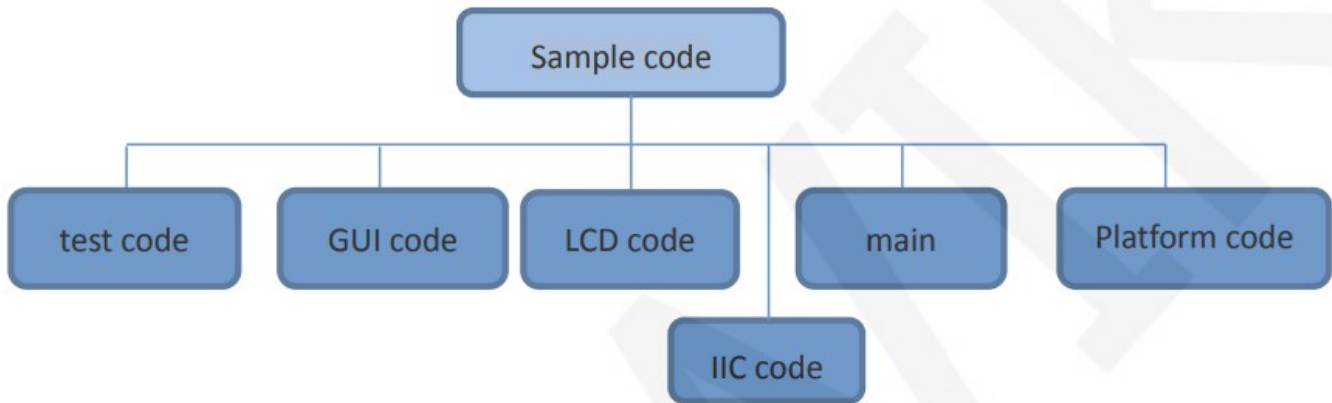

The Demo API code for the main program runtime is included in the test code;

OLED initialization and related bin parallel port write data operations are included in the OLED code;

Drawing points, lines, graphics, and Chinese and English character display related operations are included in the GUI code;


The main function implements the application to run;

Platform code varies by platform;

IIC initialization and configuration related operations are included in the IIC code;

### C. RaspberryPi code architecture description

The python test program code architecture is shown below:

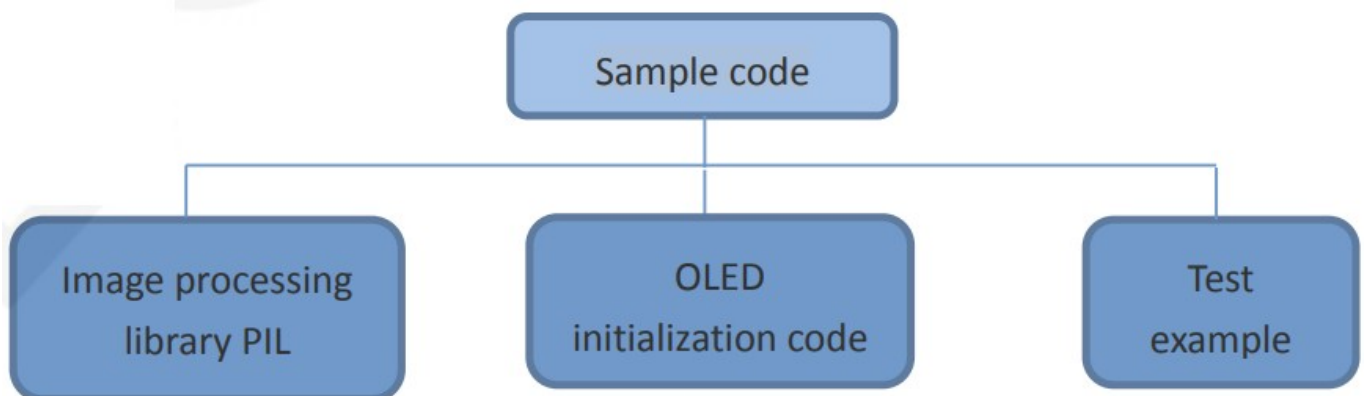


The python test program consists of but part: PIL image processing library, OLED initialization code, test sample code

PIL image processing library is responsible for image drawing, character and text display operations, etc.

OLDE initialization code is responsible for operating registers, including hardware module initialization, data and command transfer, pixel coordinates and color settings, display mode configuration, etc.

The test example is to use the API provided by the above two parts of the code to implement some test functions.

The bcm2835 and wiringPi test program code architecture is as follows:

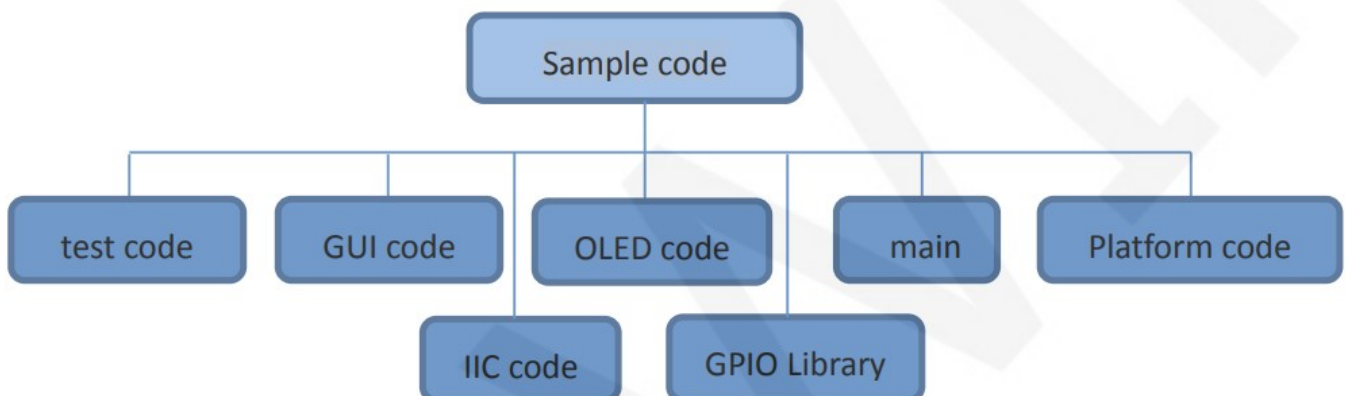

The Demo API code for the main program runtime is included in the test code;

OLED initialization and related operations are included in the OLED code;

Drawing points, lines, graphics, and Chinese and English character display related operations are included in the GUI code;

The GPIO library provides GPIO operations;



The main function implements the application to run;  
Platform code varies by platform;  
IIC initialization and configuration related operations are included in the IIC code;

## 2. GPIO definition description

### A. Arduino test program GPIO definition description

The Arduino test program uses the hardware IIC function, and the GPIO is fixed.

### B. STM32 test program GPIO definition description

The STM32 test program uses the software simulation IIC function, and the GPIO definition is placed in the iic.h file, as shown in the following figure:

```
//-----IIC总线引脚定义-----  
#define OLED_SDA      GPIO_Pin_15  //OLED屏IIC数据信号  
#define OLED_SCL      GPIO_Pin_13  //OLED屏IIC时钟信号
```

OLED\_SDA and OLED\_SCL can be defined as any idle GPIO.

### C. C51 test program GPIO definition description

The C51 test program uses the software simulation IIC function, and the GPIO definition is placed in the iic.h file, as shown in the following figure:

```
//-----IIC总线引脚定义-----  
sbit OLED_SDA = P1^5;      //OLED屏IIC数据信号 P15  
sbit OLED_SCL = P1^7;      //OLED屏IIC时钟信号 P17
```

OLED\_SDA and OLED\_SCL can be defined as any idle GPIO.

### D. RaspberryPi test program GPIO definition description

The RaspberryPi test program uses the hardware IIC function, and the GPIO is fixed.

### E. MSP430 test program GPIO definition description

The MSP430 test program uses the software simulation IIC function, and the GPIO definition is placed in the iic.h file, as shown in the following figure:

```
//-----IIC总线引脚定义-----  
#define OLED_SDA      BIT3  //OLED屏IIC数据信号  
#define OLED_SCL      BIT4  //OLED屏IIC时钟信号
```

OLED\_SDA and OLED\_SCL can be defined as any idle GPIO

## 3. IIC slave device address modification

### A. Arduino test program IIC modified from device address

The slave device address of IIC is defined in the u8g\_com\_arduino\_ssd\_i2c.c file, as shown in the figure below:

```
#define I2C_SLA      (0x3c*2)
```

Directly modify I2C\_SLA(default is 0x3c\*2).For example, change to 0x3d\*2, then the IIC slave address is 0x3d\*2

### B. STM32 and C51 test program IIC modified from device address

The slave device address of the STM32 and C51 test program IIC is defined in the iic.h file, as shown in the following figure:

```
//定义IIC从设备地址  
#define IIC_SLAVE_ADDR 0x78
```

Directly modify IIC\_SLAVE\_ADDR (default is 0x78).For example, change to 0x7A, then the IIC slave address is 0x7A.

### C. RaspberryPi test program IIC modified from device address

The slave address of bcm2835 and wiringPi test program IIC is defined in the iic.h file, as shown in the following figure:



```
#define IIC_SLAVE_ADDR 0x3C
```

Directly modify IIC\_SLAVE\_ADDR(default is 0x3C (corresponding to 0x78)).

For example, change to 0x3D, then the IIC slave address is 0x3D (corresponding to 0x7A);

The slave device address of the python test program IIC is defined in the oled.py file, as shown in the following figure:

```
IIC_SLAVE_ADDR = 0x3C
```

Directly modify IIC\_SLAVE\_ADDR(default is 0x3C (corresponding to 0x78)):

For example, change to 0x3D, then the IIC slave address is 0x3D (corresponding to 0x7A)

#### D. MSP430 test program IIC modified from device address

The slave device address of the MSP430 test program IIC is defined in the iic.h file, as shown in the following figure:

```
//定义IIC从设备地址  
#define IIC_SLAVE_ADDR 0x78
```

Directly modify IIC\_SLAVE\_ADDR (default is 0x78).For example, change to 0x7A, then the IIC slave address is 0x7A.

### 4. IIC communication code implementation

#### A. Arduino test program IIC communication code implementation

Arduino test program IIC communication code is implemented by U8glib, the specific implementation method can refer to U8glib code

#### B. STM32 test program IIC communication code implementation

The STM32 test program IIC communication code is implemented in iic.c (there are subtle differences between different MCU implementations), as shown in the following figure:

```
47 /*****  
48  * @name      :void IIC_Start(void)  
49  * @date      :2018-09-13  
50  * @function   :start iic bus  
51  * @parameters :None  
52  * @retvalue   :None  
53  *****/  
54 void IIC_Start(void)  
55 {  
56     OLED_SCL_SET();  
57     OLED_SDA_SET();  
58     OLED_SDA_CLR();  
59     OLED_SCL_CLR();  
60 }  
61  
62 /*****  
63  * @name      :void IIC_Stop(void)  
64  * @date      :2018-09-13  
65  * @function   :stop iic bus  
66  * @parameters :None  
67  * @retvalue   :None  
68  *****/  
69 void IIC_Stop(void)  
70 {  
71     OLED_SCL_SET();  
72     OLED_SDA_CLR();  
73     OLED_SDA_SET();  
74 }  
75  
76 /*****  
77  * @name      :void IIC_Wait_Ack(void)  
78  * @date      :2018-09-13  
79  * @function   :wait iic ack  
80  * @parameters :None  
81  * @retvalue   :None  
82  *****/  
83 void IIC_Wait_Ack(void)  
84 {  
85     OLED_SCL_SET();  
86     OLED_SCL_CLR();  
87 }
```

```

89  /*****
90  * @name      :void Write_IIC_Byte(u8 IIC_Byte)
91  * @date      :2018-09-13
92  * @function   :Write a byte of content with iic bus
93  * @parameters :IIC_Byte
94  * @retvalue   :None
95  *****/
96  void Write_IIC_Byte(u8 IIC_Byte)
97  {
98      u8 i;
99      u8 m,da;
100      da=IIC_Byte;
101      OLED_SCL_CLR();
102      for(i=0;i<8;i++)
103      {
104          m=da;
105          m=m&0x80;
106          if (m==0x80)
107          {
108              OLED_SDA_SET();
109          }
110          else
111          {
112              OLED_SDA_CLR();
113          }
114          da=da<<1;
115          OLED_SCL_SET();
116          OLED_SCL_CLR();
117      }
118  }

```

```

120  /*****
121  * @name      :void Write_IIC_Command(u8 IIC_Command)
122  * @date      :2018-09-13
123  * @function   :Write a byte of command to oled screen
124  * @parameters :IIC_Command:command to be written
125  * @retvalue   :None
126  *****/
127  void Write_IIC_Command(u8 IIC_Command)
128  {
129      IIC_Start();
130      Write_IIC_Byte(IIC_SLAVE_ADDR);          //Slave address,SA0=0
131      IIC_Wait_Ack();
132      Write_IIC_Byte(0x00);          //write command
133      IIC_Wait_Ack();
134      Write_IIC_Byte(IIC_Command);
135      IIC_Wait_Ack();
136      IIC_Stop();
137  }
138
139  /*****
140  * @name      :void Write_IIC_Data(u8 IIC_Data)
141  * @date      :2018-09-13
142  * @function   :Write a byte of data to oled screen
143  * @parameters :IIC_Data:data to be written
144  * @retvalue   :None
145  *****/
146  void Write_IIC_Data(u8 IIC_Data)
147  {
148      IIC_Start();
149      Write_IIC_Byte(IIC_SLAVE_ADDR);          //D/C#=0; R/W#=0
150      IIC_Wait_Ack();
151      Write_IIC_Byte(0x40);          //write data
152      IIC_Wait_Ack();
153      Write_IIC_Byte(IIC_Data);
154      IIC_Wait_Ack();
155      IIC_Stop();
156  }
157

```

### C. C51 test program IIC communication code implementation

C51 test program IIC communication code is implemented in iic.c, as shown below:

```

47  /*****
48  * @name      :void IIC_Start(void)
49  * @date      :2018-09-13
50  * @function   :start iic bus
51  * @parameters :None
52  * @retvalue   :None
53  *****/
54  void IIC_Start(void)
55  {
56      OLED_SCL_SET();
57      OLED_SDA_SET();
58      OLED_SDA_CLR();
59      OLED_SCL_CLR();
60  }
61
62  /*****
63  * @name      :void IIC_Stop(void)
64  * @date      :2018-09-13
65  * @function   :stop iic bus
66  * @parameters :None
67  * @retvalue   :None
68  *****/
69  void IIC_Stop(void)
70  {
71      // OLED_SCL_SET();
72      OLED_SDA_CLR();
73      OLED_SDA_SET();
74  }
75
76  /*****
77  * @name      :void IIC_Wait_Ack(void)
78  * @date      :2018-09-13
79  * @function   :wait iic ack
80  * @parameters :None
81  * @retvalue   :None
82  *****/
83  void IIC_Wait_Ack(void)
84  {
85      OLED_SCL_SET();
86      OLED_SCL_CLR();
87  }
88

```

```

89  /*****
90  * @name      :void Write_IIC_Byte(u8 IIC_Byte)
91  * @date      :2018-09-13
92  * @function   :Write a byte of content with iic bus
93  * @parameters :IIC_Byte
94  * @retvalue   :None
95  *****/
96  void Write_IIC_Byte(u8 IIC_Byte)
97  {
98      u8 i;
99      u8 m,da;
100      da=IIC_Byte;
101      OLED_SCL_CLR();
102      for(i=0;i<8;i++)
103      {
104          m=da;
105          m=m<<0x80;
106          if(m==0x80)
107          {
108              OLED_SDA_SET();
109          }
110          else
111          {
112              OLED_SDA_CLR();
113          }
114          da=da<<1;
115          OLED_SCL_SET();

```



```

116 |     OLED_SCL_CLR();
117 | }
118 | }

120 | /*****
121 |  * @name      :void Write_IIC_Command(u8 IIC_Command)
122 |  * @date      :2018-09-13
123 |  * @function   :Write a byte of command to oled screen
124 |  * @parameters :IIC_Command:command to be written
125 |  * @retvalue   :None
126 | *****/
127 | void Write_IIC_Command(u8 IIC_Command)
128 | {
129 |     IIC_Start();
130 |     Write_IIC_Byte(IIC_SLAVE_ADDR);          //Slave address,SA0=0
131 |     IIC_Wait_Ack();
132 |     Write_IIC_Byte(0x00);          //write command
133 |     IIC_Wait_Ack();
134 |     Write_IIC_Byte(IIC_Command);
135 |     IIC_Wait_Ack();
136 |     IIC_Stop();
137 | }
138 |
139 | /*****
140 |  * @name      :void Write_IIC_Data(u8 IIC_Data)
141 |  * @date      :2018-09-13
142 |  * @function   :Write a byte of data to oled screen
143 |  * @parameters :IIC_Data:data to be written
144 |  * @retvalue   :None
145 | *****/
146 | void Write_IIC_Data(u8 IIC_Data)
147 | {
148 |     IIC_Start();
149 |     Write_IIC_Byte(IIC_SLAVE_ADDR);          //D/C#=0; R/W#=0
150 |     IIC_Wait_Ack();
151 |     Write_IIC_Byte(0x40);          //write data
152 |     IIC_Wait_Ack();
153 |     Write_IIC_Byte(IIC_Data);
154 |     IIC_Wait_Ack();
155 |     IIC_Stop();
156 | }

```

#### A. RaspberryPi test program IIC communication code implementation

wiringPi test program IIC communication code is implemented in iic.c, as shown below:

```

50:
51: uint32_t iic_fd;
52:
53:
54: uint32_t IIC_init(void)
55: {
56:     uint32_t fd;
57:     fd = wiringPiI2CSetup (IIC_SLAVE_ADDR);
58:     return fd;
59: }
60:
61: /*****
62:  * @name      :void IIC_WriteCmd(uint8_t I2C_Command)
63:  * @date      :2018-09-14
64:  * @function   :write a byte of command with iic bus
65:  * @parameters :I2C_Command:command to be written
66:  * @retvalue   :None
67:  *****/
68: void IIC_WriteCmd(uint8_t I2C_Command)
69: {
70:     wiringPiI2CWriteReg8(iic_fd, IIC_COMMAND, I2C_Command);
71: }
72:
73: /*****
74:  * @name      :void IIC_WriteDat(uint8_t I2C_Data)
75:  * @date      :2018-09-14
76:  * @function   :write a byte of data with iic bus
77:  * @parameters :I2C_Data:data to be written
78:  * @retvalue   :None
79:  *****/
80: void IIC_WriteDat(uint8_t I2C_Data)
81: {
82:     wiringPiI2CWriteReg8(iic_fd, IIC_DATA, I2C_Data);
83: }
84:

```

First call IIC\_init to initialize, set the IIC slave address, get the IIC device file descriptor, and then use the IIC device file descriptor to write the register command and memory data respectively.

The bcm2835 test program IIC communication code is implemented in iic.c, as shown below:

```

58: void IIC_WriteCmd(uint8_t I2C_Command)
59: {
60:     char buf[2] = {0};
61:     int ref;
62:     buf[0] = IIC_COMMAND;
63:     buf[1] = I2C_Command;
64:     ref = bcm2835_i2c_write(buf, 2);
65:     while(ref != 0)
66:     {
67:         ref = bcm2835_i2c_write(buf, 2);
68:         if(ref == 0)
69:         {
70:             break;
71:         }
72:     }
73: }
74: /*****
75:  * @name      :void IIC_WriteDat(uint8_t I2C_Data)
76:  * @date      :2018-09-14
77:  * @function   :write a byte of data with iic bus
78:  * @parameters :I2C_Data:data to be written
79:  * @retvalue   :None
80:  *****/
81: void IIC_WriteDat(uint8_t I2C_Data)
82: {
83:     char buf[2] = {0};
84:     int ref;
85:     buf[0] = IIC_DATA;
86:     buf[1] = I2C_Data;
87:     ref = bcm2835_i2c_write(buf, 2);
88:     while(ref != 0)
89:     {
90:         ref = bcm2835_i2c_write(buf, 2);
91:         if(ref == 0)
92:         {
93:             break;
94:         }
95:     }
96: }
97: /*****
98:  * @name      :void IIC_init(void)
99:  * @date      :2018-09-14
100:  * @function   :initialise iic bus
101:  * @parameters :None
102:  * @retvalue   :None
103:  *****/
104: void IIC_init(void)
105: {
106:     bcm2835_i2c_begin();
107:     bcm2835_i2c_setSlaveAddress(IIC_SLAVE_ADDR);    //7 bits i2c address
108:     bcm2835_i2c_set_baudrate(2000000);    //1M I2C rate
109: }

```

First call IIC\_init to initialize, set the IIC slave address, get the IIC device file descriptor, and then use the IIC device file descriptor to write the register command and memory data respectively.

Python test program IIC communication code is implemented in oled.py, as shown below

```

→ self.oledsmbus = smbus
→ def iic_command(self, val):
→     self.oledsmbus.write_byte_data(IIC_SLAVE_ADDR, COMMAND_MODE, val)
→ def iic_data(self, val):
→     self.oledsmbus.write_byte_data(IIC_SLAVE_ADDR, DATA_MODE, val)

```

First call SMBus for initialization, then call write\_byte\_data function to write register command and memory data respectively.

#### D. MSP430 test program IIC communication code implementation

MSP430 test program IIC communication code is implemented in iic.c, as shown below:



```

/*****
 * @name      :void IIC_Start(void)
 * @date      :2018-09-13
 * @function   :start iic bus
 * @parameters :None
 * @retvalue   :None
 *****/
void IIC_Start(void)
{
    OLED_SCL_SET();
    OLED_SDA_SET();
    OLED_SDA_CLR();
    OLED_SCL_CLR();
}

/*****
 * @name      :void IIC_Stop(void)
 * @date      :2018-09-13
 * @function   :stop iic bus
 * @parameters :None
 * @retvalue   :None
 *****/
void IIC_Stop(void)
{
    OLED_SCL_SET();
    OLED_SDA_CLR();
    OLED_SDA_SET();
}

/*****
 * @name      :void IIC_Wait_Ack(void)
 * @date      :2018-09-13
 * @function   :wait iic ack
 * @parameters :None
 * @retvalue   :None
 *****/
void IIC_Wait_Ack(void)
{
    OLED_SCL_SET();
    OLED_SCL_CLR();
}

```

```

/*****
* @name      :void Write_IIC_Byte(u8 IIC_Byte)
* @date      :2018-09-13
* @function   :Write a byte of content with iic bus
* @parameters :IIC_Byte
* @retvalue   :None
*****/
void Write_IIC_Byte(u8 IIC_Byte)
{
    u8 i;
    u8 m,da;
    da=IIC_Byte;
    OLED_SCL_CLR();
    for(i=0;i<8;i++)
    {
        m=da;
        m=m&0x80;
        if(m==0x80)
        {
            OLED_SDA_SET();
        }
        else
        {
            OLED_SDA_CLR();
        }
        da=da<<1;
        OLED_SCL_SET();
        OLED_SCL_CLR();
    }
}

```



```

/*****
* @name      :void Write_IIC_Command(u8 IIC_Command)
* @date      :2018-09-13
* @function   :Write a byte of command to oled screen
* @parameters :IIC_Command:command to be written
* @retvalue   :None
*****/
void Write_IIC_Command(u8 IIC_Command)
{
    IIC_Start();
    Write_IIC_Byte(IIC_SLAVE_ADDR);           //Slave address,SA0=0
    IIC_Wait_Ack();
    Write_IIC_Byte(0x00);                      //write command
    IIC_Wait_Ack();
    Write_IIC_Byte(IIC_Command);
    IIC_Wait_Ack();
    IIC_Stop();
}

/*****
* @name      :void Write_IIC_Data(u8 IIC_Data)
* @date      :2018-09-13
* @function   :Write a byte of data to oled screen
* @parameters :IIC_Data:data to be written
* @retvalue   :None
*****/
void Write_IIC_Data(u8 IIC_Data)
{
    IIC_Start();
    Write_IIC_Byte(IIC_SLAVE_ADDR);           //D/C#=0; R/W#=0
    IIC_Wait_Ack();
    Write_IIC_Byte(0x40);                     //write data
    IIC_Wait_Ack();
    Write_IIC_Byte(IIC_Data);
    IIC_Wait_Ack();
    IIC_Stop();
}

```

## Common software

This set of test examples needs to display Chinese and English, symbols and pictures, so PCtoLCD2002 modulo software is used. Here, the setting of the modulo software is explained only for the test program. The PCtoLCD2002 modulo software settings are as follows:

Dot matrix format select Dark code the modulo mode select the progressive mode(C51 and MSP430 test program needs to choose determinant)

Take the model to choose the direction (high position first) (C51 and MSP430 test program needs to choose reverse (low position first))

Output number system selects hexadecimal number

Custom format selection C51 format


The specific setting method is as follows:

[http://www.lcdwiki.com/Chinese\\_and\\_English\\_display\\_modulo\\_settings](http://www.lcdwiki.com/Chinese_and_English_display_modulo_settings)

# LCD wiki

---

## Documents / Resources

|   |   |
|---|---|
|  | <p><a href="#">LCD wiki MC154GX 1.54inch IIC OLED Module</a> [pdf] User Manual</p> <p>MC154GX 1.54inch IIC OLED Module, MC154GX, 1.54inch IIC OLED Module, IIC OLED Module, OLED Module</p> |
|---|---|

## References

- [User Manual](#)