

LECKEY Harness Range Instruction Manual

Home » **LECKEY** » **LECKEY** Harness Range Instruction Manual



Harness Range User Instructions




Contents

- 1 FITTING THE HARNESS
 - 1.1 LECKEY Kit
 - 1.2 LECKEY Mygo Seat
 - 1.3 LECKEY Squiggles Seat
 - 1.4 LECKEY Everyday Activity
- Seat
- 2 Documents / Resources
- **3 Related Posts**

FITTING THE HARNESS

Please note that when fitting the harness strap to the Camlock, you must follow the following safety measures:

- Ensure the male buckle is positioned with the center bar flat side up (triangular point facing downwards) and the longest edge of the buckle to the top.
- Thread strap through the rear slot (furthest away from the buckle)
- Push strap down through the front slot (closest to the buckle)
- Thread strap through Camlock and close to secure
- Use the D ring to adjust the position of the strap

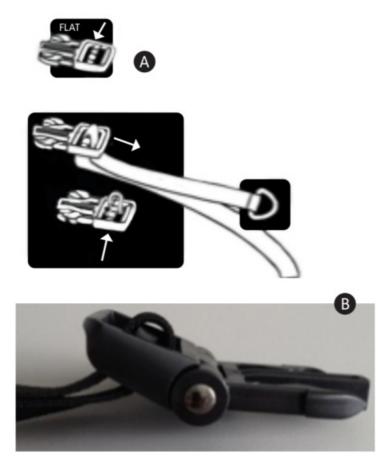

The pack should contain the following


(Screws below are scaled 1:1 so can be used as a size reference)

ags	Used In
SJ117 (40FF)	Leckey Everday Activity Seat
SJ26 (4OFF)	Leckey Squiggles Seat Leckey Mygo Seat Leckey KIT
SJ24 (2OFF)	Leckey Squiggles Seat Leckey Mygo Seat
SJ25 (2OFF)	Leckey Squiggles Seat
S104 (4OFF)	Leckey Squiggles Seat Leckey Mygo Seat Leckey KIT Leckey Everday Activity Seat

LECKEY Kit




LECKEY Mygo Seat

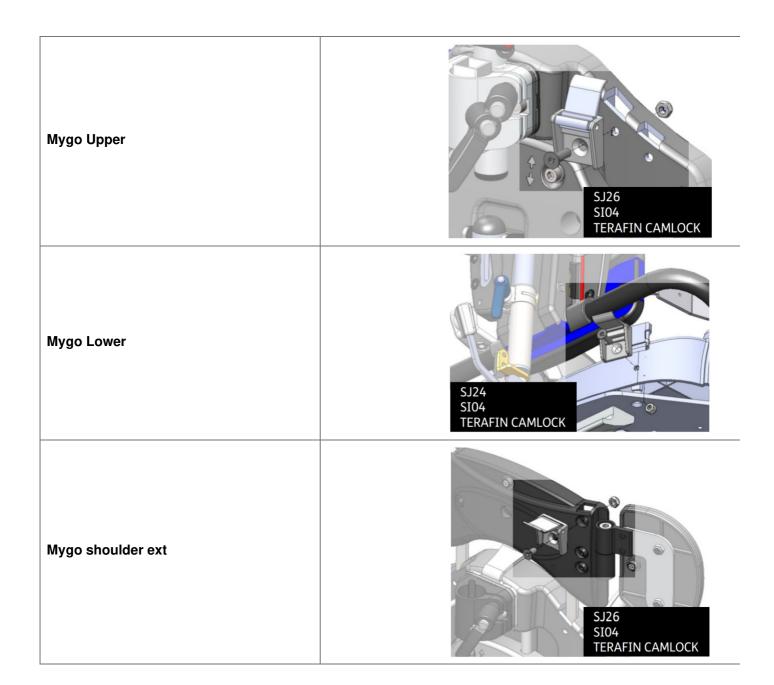


LECKEY Squiggles Seat



LECKEY Everyday Activity Seat

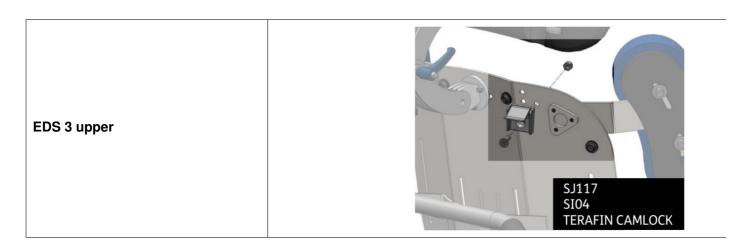

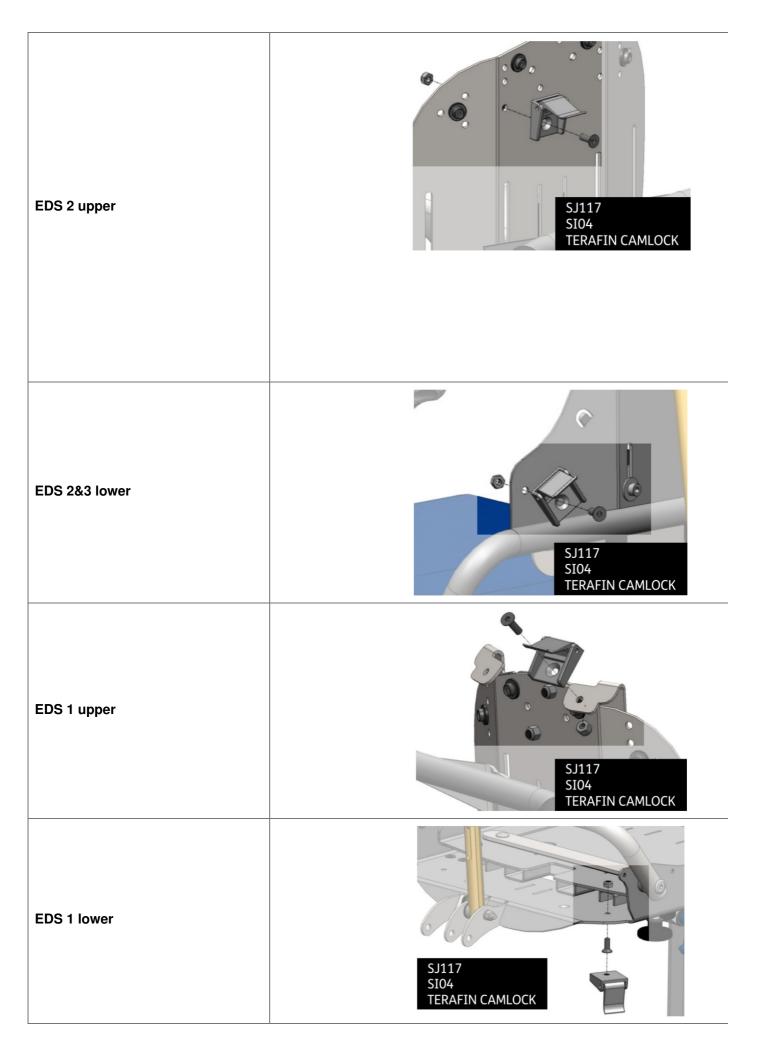



LECKEY Harness Range [pdf] Instruction Manual Harness Range

Manuals+,