

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[Manuals.plus](#) /

› [Shimbol](#) /

› Shimbol CP5 Ultra 5" Vlog Selfie Monitor Screen User Manual

## Shimbol CP5 Ultra

# Shimbol CP5 Ultra 5" Vlog Selfie Monitor Screen User Manual

## INTRODUCTION

---

This manual provides detailed instructions for the setup, operation, and maintenance of your Shimbol CP5 Ultra 5-inch Vlog Selfie Monitor Screen. Designed for seamless integration with both iPhone and Android devices, the CP5 Ultra offers a responsive touchscreen, ultra-low latency wireless screen mirroring, and extended battery life for an enhanced vlogging and live streaming experience. Please read this manual thoroughly before using the device to ensure optimal performance and longevity.

## PRODUCT OVERVIEW AND KEY FEATURES

---

The Shimbol CP5 Ultra is a versatile 5-inch Full HD touchscreen monitor designed to wirelessly operate and mirror your smartphone's display. It features:

- **5-inch Full HD Touch Screen:** Directly control apps with multi-touch gestures for precise adjustments.
- **Ultra-Low Latency:** Experience near-instant response with less than 0.04 seconds latency.
- **50m Wireless Transmission Range:** Monitor your footage from a distance in open, unobstructed environments.
- **Broad Phone Compatibility:** Works with most Android and iOS devices.
- **4K Monitoring Support:** Enables smooth 4K recording and real-time preview with compatible apps like Blackmagic Camera.
- **4-Hour Battery Life:** Built-in 2000mAh battery for extended shooting sessions.
- **Integrated Speaker:** Play back footage with clear audio without additional accessories.
- **Magnetic Mount:** Securely attach to compatible devices.

# Shimbol CP5 Ultra

5" FHD Display | Reverse Control | Screen Mirroring

Tap the Screen, Perfect Your Selfie

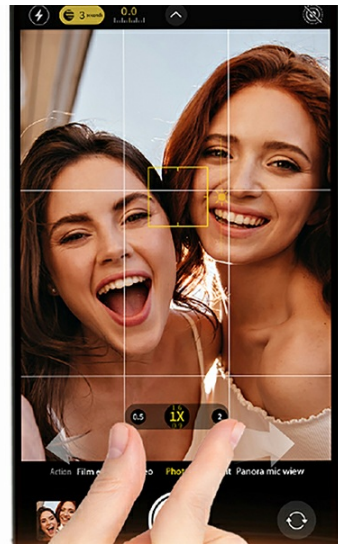


Image: Overview of the Shimbol CP5 Ultra's main features.

## WHAT'S INCLUDED

Upon unboxing your Shimbol CP5 Ultra, please verify that all the following items are present:

- Shimbol CP5 Ultra Monitor
- Magnetic Ring
- USB-C Charging Cable
- Screen Protector
- User Manual



**What's Included**

Image: Contents of the Shimbol CP5 Ultra package.

## SETUP

### 1. Charging the Device

Before initial use, fully charge the Shimbol CP5 Ultra. Connect the provided USB-C cable to the monitor's USB 5V port and plug the other end into a compatible USB power adapter (not included). The charging indicator will show the charging status.



Image: The Shimbol CP5 Ultra features a built-in 2000mAh battery for up to 4 hours of continuous use.

## 2. Attaching the Magnetic Ring (Optional)

If your phone does not have built-in MagSafe compatibility, you can use the included magnetic ring. Clean the back of your phone or phone case, then carefully adhere the magnetic ring to the desired position. This allows the CP5 Ultra to snap on securely.

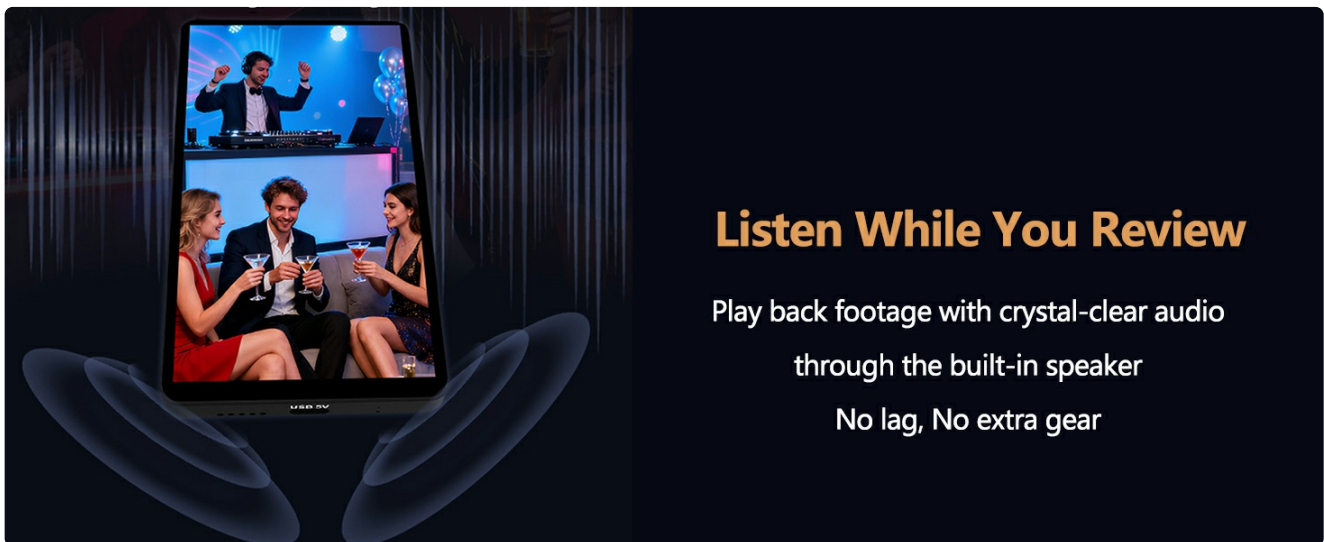


Image: The Shimbol CP5 Ultra can snap onto MagSafe-compatible phones or cases with the included magnetic ring.

## 3. Connecting to Your Phone

The CP5 Ultra connects wirelessly to your smartphone via Bluetooth for control and screen mirroring.

1. Power on the Shimbol CP5 Ultra.
2. On your smartphone, navigate to **Settings > Bluetooth**.
3. Select the CP5 Ultra device from the list of available devices to pair.
4. Once paired, open the desired camera or vlogging application on your phone. The CP5 Ultra screen will mirror your phone's display.

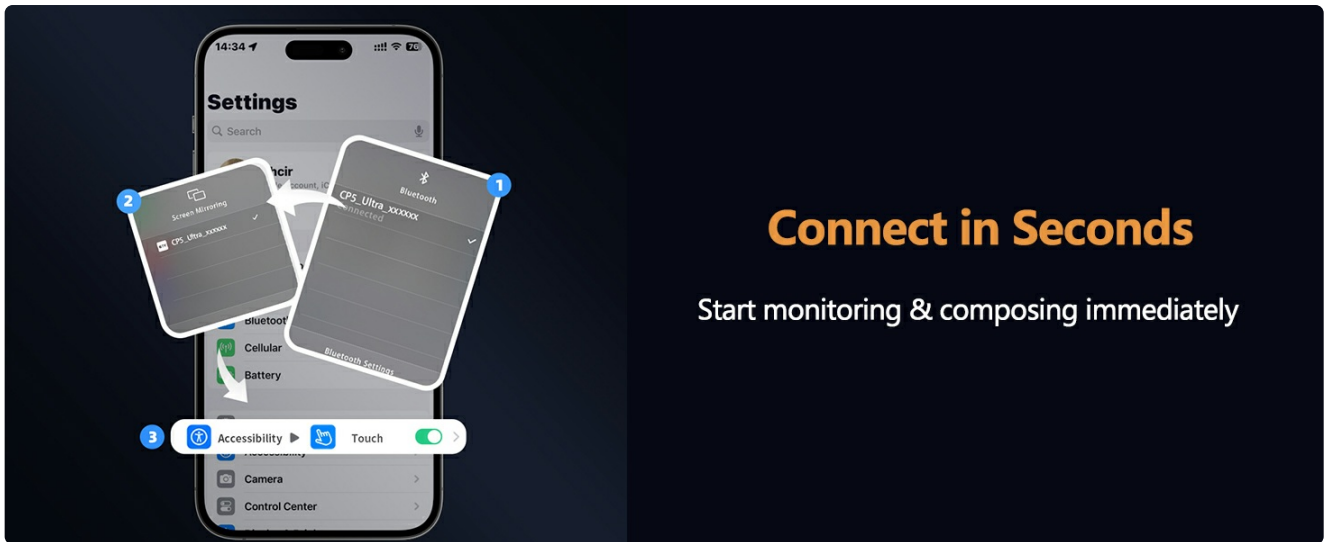


Image: Steps for connecting the Shimbol CP5 Ultra to your phone in seconds.

## OPERATING INSTRUCTIONS

### 1. Touch Screen Operation

The 5-inch Full HD touchscreen allows direct interaction with your phone's applications. Use standard multi-touch gestures such as pinching to zoom, swiping to navigate, and tapping to select or adjust settings within your camera app.

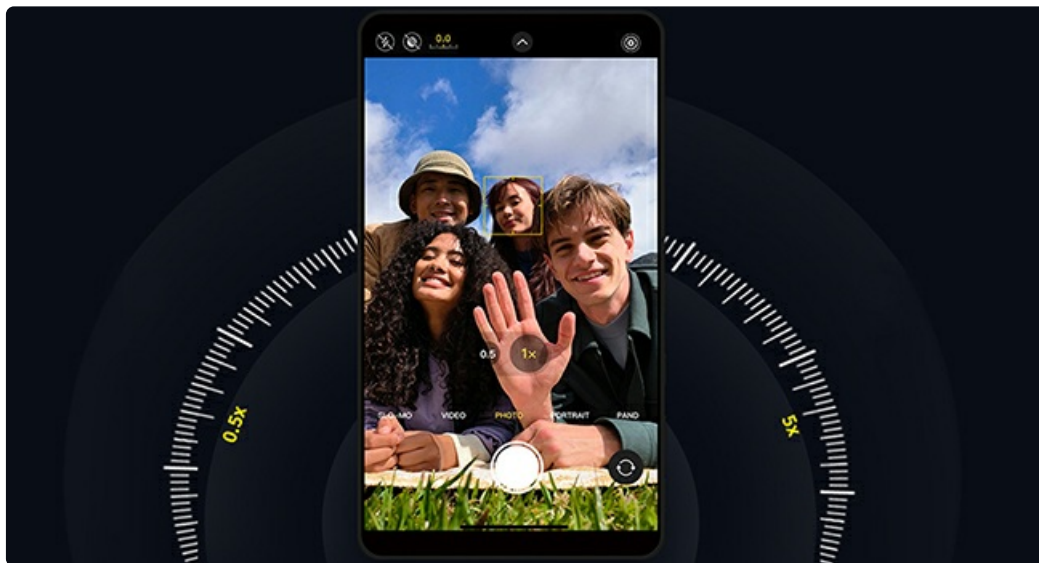


Image: The 5-inch FHD touchscreen allows scrolling and viewing every detail.

### 2. Wireless Zoom and Focus

Utilize multi-touch gestures on the CP5 Ultra screen to precisely control zoom and focus functions within your smartphone's camera application. This allows for fine-tuning your shots directly from the monitor.



Image: Multi-touch zoom and focus for precise control.

### 3. Mirror Flip Function

The mirror flip function allows you to preview your shot correctly before capture, which is particularly useful for vlogging and self-recording to ensure proper framing and composition.

### 4. 4K Monitoring Support

When used with compatible applications such as Blackmagic Camera, the CP5 Ultra supports smooth 4K recording and real-time preview, providing high-quality monitoring for professional-grade content creation.



Image: Pro 4K monitoring with apps like Blackmagic Camera for smooth recording and real-time preview.

### 5. Audio Playback

The built-in speaker allows you to play back recorded footage with crystal-clear audio directly from the monitor, eliminating the need for external speakers or headphones during review.



Image: Listen to your footage with crystal-clear audio through the built-in speaker.

## MAINTENANCE

### 1. Cleaning

To clean the monitor screen, use a soft, lint-free cloth. For stubborn smudges, slightly dampen the cloth with water or a screen-safe cleaning solution. Avoid using harsh chemicals or abrasive materials.

### 2. Storage

When not in use, store the Shimbol CP5 Ultra in a cool, dry place away from direct sunlight and extreme temperatures. Use a protective case to prevent scratches and damage.

### 3. Battery Care

To prolong battery life, avoid fully discharging the device frequently. If storing for an extended period, charge the battery to approximately 50% before storage and recharge every few months.

## TROUBLESHOOTING

| Issue                         | Possible Cause  | Solution   |
|-------------------------------|---|--|
| Monitor does not power on     | Low battery; Power button not pressed correctly                 | Charge the device fully; Press and hold the power button for a few seconds.  |
| Cannot connect to phone       | Bluetooth not enabled; Device not in pairing mode; Interference | Ensure Bluetooth is on on your phone; Restart both devices; Move closer to the monitor; Check for other Bluetooth devices.         |
| Screen mirroring lag or delay | Distance too far; Obstructions; Network interference            | Ensure you are within the 50m range in an open environment; Reduce obstructions between devices; Minimize other wireless activity. |
| Touchscreen unresponsive      | Software glitch; Screen dirty                                   | Restart the monitor; Clean the screen with a soft cloth.   |

## SPECIFICATIONS

---

| Feature                   | Detail                                   |
|---------------------------|--|
| Model                     | CP5 Ultra                                |
| Screen Size               | 5-inch LCD                               |
| Touch Method              | Multi-touch                              |
| Resolution                | 1080 x 1920                              |
| Brightness                | 500 nits                                 |
| Power Supply              | Type-C 5V / Built-in battery             |
| Power Consumption         | < 2.5W                                   |
| Weight                    | 136g                                     |
| Dimensions                | 124.4 x 69.6 x 13 mm                     |
| Speaker                   | 8Ω 0.4W                                  |
| Bluetooth Shutter Control | Supported                                |
| Transmission Frequency    | 2.4G / 5GHz                              |
| Transmission Latency      | 40ms (<0.04s)                            |
| Receiving Sensitivity     | -85dBm                                   |
| Transmission Range        | 50m (in open, unobstructed environments) |

## WARRANTY AND SUPPORT

---

The Shimbol CP5 Ultra comes with a standard manufacturer's warranty. For specific warranty terms and conditions, please refer to the warranty card included in your product packaging or visit the official Shimbol website. For technical support, troubleshooting assistance, or service inquiries, please contact Shimbol customer support through their official channels.