


legrand 049039 Connected Thermostat Smarther with Netatmo Flush Mounting User Guide

<u>Home</u> » <u>Legrand</u> » legrand 049039 Connected Thermostat Smarther with Netatmo Flush Mounting User Guide

legrand 049039 Connected Thermostat

Smarther with Netatmo Flush Mounting

User Guide

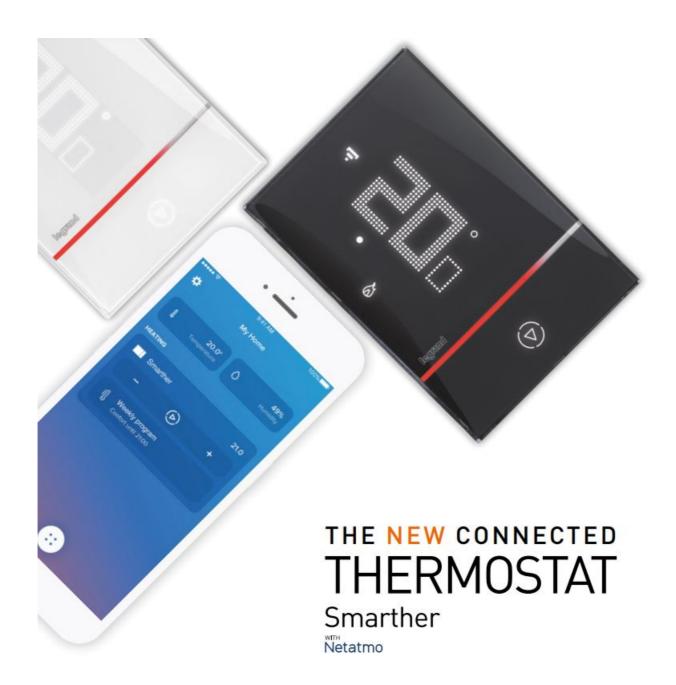







thermostat forms part of Eliot - Legrand's connected devices programme.



Contents

- 1 Comfort and saving
- 2 Ease of use
- 3 Home + Control app
- 4 Maximum comfort in every
- 5 How to install
- 6 Documents / Resources
- **7 Related Posts**

Comfort and saving



SETTING **PROGRAMMES**

Using the Home + Control app, it's possible to create preset programmes based on user habits.





AWAY

Users can adjust the thermostat remotely via the app whenever they are away from home.





BOOST

The boost function can be used to activate the heating or cooling system for a limited time (30, 60 or 90 minutes), without affecting the set programme and temperature.








(b)












MONITORING **ENERGY USE**

Using the Home + Control app, it's possible to control and monitor consumption.





MAXIMUM COMFORT IN EVERY ZONE

Using the same app, users can manage several thermostats in the same home or in different homes, as well as setting the desired temperature in every room for maximum comfort.









LOCAL DEVICE CONTROL



VOICE CONTROL

It's also possible to manage the heating with your voice using virtual assistants; Siri (Apple), Google Assistant, Amazon Alexa. For example:

GOOGLE: "Ok Google, set the

kitchen to 21°C"

AMAZON: "Alexa, increase the living room temperature by 3°C"


APPLE: "Siri, set the temperature to 20°C"



GEOLOCATION

When used in conjunction with virtual assistants, it is possible to create a routine which is triggered by your location, for example switching off the heating when users leave the home to save energy.









Display the temperature and set it as desired



Display the set temperature and humidity




Activate the boost function



Home + Control app


- · Remotely manage the thermostat, simply and intuitively
- · Create and modify weekly programmes
- Manage the thermostat from several smartphones and by different users
- Control several thermostats in the same home or different homes
- Manage thermostat updates

Set up the connected thermostat in a few simple steps

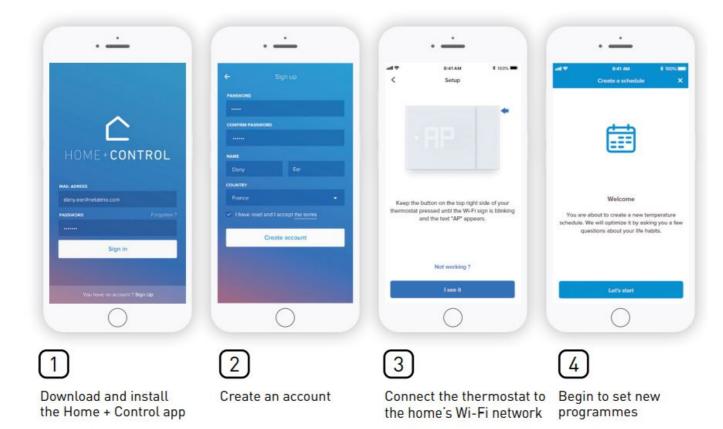

SETTING PROGRAMMES

- Choose the guided process to set daily and weekly programmes
- Set the desired temperature for day and night or whilst away from the home
- The programme is ready for use

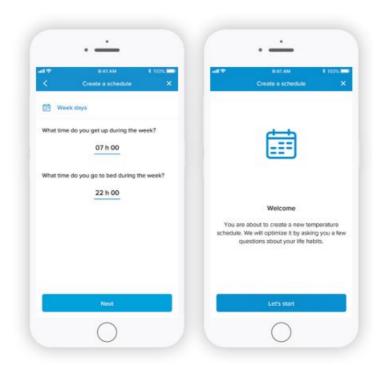

For help and assistance please contact the Legrand UK & Ireland technical team: +44 (0) 370 608 9020






AWAY

It is possible to control the home at any time:

- Change the temperature or the set program
- Set the away and frost-guard functions without affecting the set programme









BOOST FUNCTION

Activate heating or cooling for a limited time, regardless of the set programme or room temperature.


Once the boost function has ended, the set programme will be restored.

- Click on the 'boost' function icon
- Select the duration (30, 60, or 90 minutes) and confirm




 Easily monitor and control the home's heating use and check the status of set programmes






Multiple thermostats? Multiple homes?

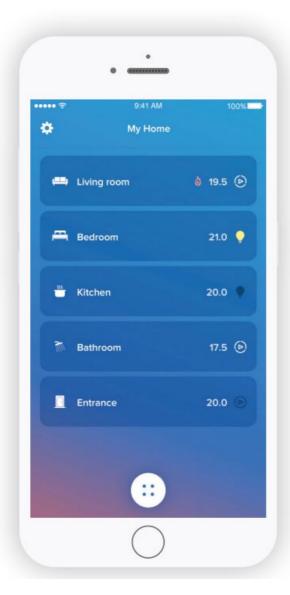

As well as a single device you can also manage:



Several thermostats in the same home (zone isolation of the system)



Thermostats in different buildings (main home and second home)





Setting the temperature of every room with Smarther with Netatmo is simple:



Using the same Home + Control app, users can control and adjust smart radiator valves installed on radiators.



Netatmo smart radiator valves

How to install






In both types of installation prepare four cables:

- two for the 230V AC power supply
- two for the boiler contact

Replace old thermostats, whether flush or wall mounted.



The new connected thermostat is an ideal solution for both new installations and replacing an old thermostat, whether flush or wall mounted.

When replacing an old battery thermostat, you will need two wires for the 230V AC power supply.

REPLACE AN OLD SMARTHER CONNECTED THERMOSTAT WITH THE NEW SMARTHER WITH NETATMO**

	SMARTHER 049036 - 049037	SMARTHER WITH NETATMO 049038 - 049039 - 049040
Range	Flush mounted: white Wall mounted: white	Flush mounted: white and black Wall mounted: white
Арр	Bticino Thermostat	Home + Control
Voice control	Google Assistant and Amazon Alexa	Google Assistant, Amazon Alexa and Apple HomeKit
Geolocation	Using the dedicated app	Using the virtual assistant app
Monitoring of consumption	No	Yes
Management of Netatmo radiator valves	No	Yes
Energy class	Class 1	Class 4

^{**} Items 049036 and 049037 cannot be updated: to enjoy all the new functions they must be replaced with a new connected thermostat

Smarther with Netatmo CONNECTED THERMOSTAT Features and connections


Front view



Rear view

FLUSH MOUNTED VERSION



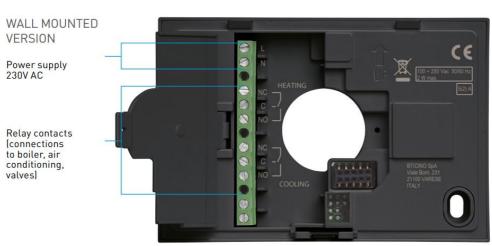

Smarther with Netatmo connected thermostat








0490 39





0490 40

Pack	Cat. Nos.	Connected thermostat
		Connected thermostat with the Home + Control app, allows the adjustment and monitoring of temperature precisely and accurately; all programming and most functions are performed simply and intuitively using the app With Wi-Fi connection, Smarther can be programmed and controlled remotely; it can also display the temperature and humidity measured in the room Temperature level can be set locally for manual operation and the boost mode can be activated Boost forces the switching on of the system for a limited time (30, 60 or 90 minutes) independent of the measured and programmed temperature It's also possible to set a different temperature in each room of the home for maximum comfort, thanks to its compatibility with Netatmo's smart radiator valves Can also be controlled with Google Home, Amazon Alexa and Apple HomeKit virtual assistants - Power supply 110 to 240V AC, 50/60 Hz - 2 W max absorption - Maximum cable section 1 x 1.5 mm² - Operating temperature 5 °C to 40 °C - Temperature set-point 5 °C to 40 °C - Temperature set-point 5 °C to 40 °C - 1 contact output in switching free of 5(2) A potential - Type of operation 1BU - Pollution index 2 - Rated pulse voltage 4 kV - Wireless device in compliance with 802·11b/g/n standard, frequency 2·4 - 2·4835 GHz, transmission power < 20 dBm - WPA/WPA2 security protocol
1	0490 38	Flush mounted Flush mounted using back boxes Cat. Nos. 503E or 500 (for Cat. No. 500 use wall dowels) For plasterboard installation, use back boxes Cat. Nos. PB503 and PB502 White
1	0490 39	
		Surface mounted Wall mounted using screws and dowels suitable for surface installation (brickwork, plasterboard, tiles etc.)
1	0490 40	White

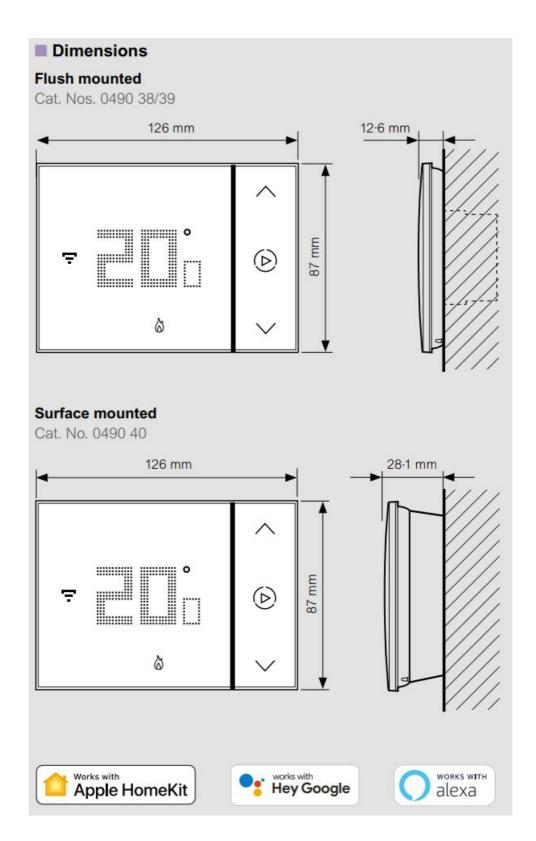

Contact details United Kingdom

Great King Street North, Birmingham, B19 2LF

Customer Services:

Tel: +44 (0) 345 605 4333

E-mail: legrand.co.uk

Quotations and Technical Support:

Tel: +44 (0) 370 608 9020

E-mail: uk-uisales@legrand.co.uk

Republic of Ireland:

Tel: 01 295 9673 Fax: 01 295 4671 E-mail: legrand.co.uk

In accordance with its policy of continuous improvement, the Company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in this catalogue are for guidance and cannot be held binding on the Company. All contents and design presentation included in this publication are © Legrand Electric Limited. All rights reserved. 2020



www.legrand.co.uk www.legrand.ie

www.youtube.com/legrandtvuk

www.vltimum.in

www.linkedin.com/company/legranduk



head office (UK and Ireland):

Legrand Electric Limited Great King Street North, Birmingham, B19 2LF

Tel: +44 (0) 370 608 9000 Fax: +44 (0) 370 608 9004 Website:- www.legrand.co.uk

The Legrand logo is a registered trademark of the Legrand group of companies

Smarther with Netatmo product guide.pdf 10/2020

Documents / Resources



<u>legrand 049039 Connected Thermostat Smarther with Netatmo Flush Mounting</u> [pdf] User Guide

049039, Connected Thermostat Smarther with Netatmo Flush Mounting, 049039 Connected Thermostat Smarther with Netatmo Flush Mounting

Manuals+,