



# Lenkeng LKV372KVM HDMI and USB Extender User Manual

[Home](#) » [LENKENG](#) » Lenkeng LKV372KVM HDMI and USB Extender User Manual 

## Contents

- [1 Lenkeng LKV372KVM HDMI and USB Extender](#)
- [2 Important Safety Notice](#)
- [3 Introduction](#)
- [4 Features](#)
- [5 Package Contents](#)
- [6 Installation Requirements](#)
- [7 Interfaces](#)
- [8 Installation Procedures](#)
- [9 FAQ](#)
- [10 Specification](#)
- [11 Disclaimer](#)
- [12 Documents / Resources](#)
- [13 Related Posts](#)



**Lenkeng LKV372KVM HDMI and USB Extender**



## Important Safety Notice

1. Do not disassemble the device to repair during the working process to avoid electric shock.
2. Please cut off the power before installation. Live installation may damage the equipment.
3. Do not expose the devices to rain, moisture, and liquid.
4. Use a 5V/1A DC adapter only. Make sure the specification matched if using 3rd party DC adapters.


## Introduction

This HDMI KVM Extender includes a transmitter and a receiver, allowing the HDMI signal to be transmitted up to 70 meters at 1080p resolution using a Cat6/6A/7 network cable. It adopts a point-to-point connection configuration and supports KVM. It is perfect for outdoor advertising, monitor system, home entertainment, conference, etc.

## Features

1. Zero latency.
2. Support up to 4K@30Hz resolution.
3. Support CAT6/6A/7 network cables, 1080p@60Hz transmission distance is up to 70 meters, 4K@30Hz transmission distance is up to 40 meters.
4. Support KVM function.
5. Support HDR10.
6. Lighting protection, surge protection, ESD protection.
7. Automatically adjusts parameters to match different network cables and achieve the best display performance.

## Package Contents

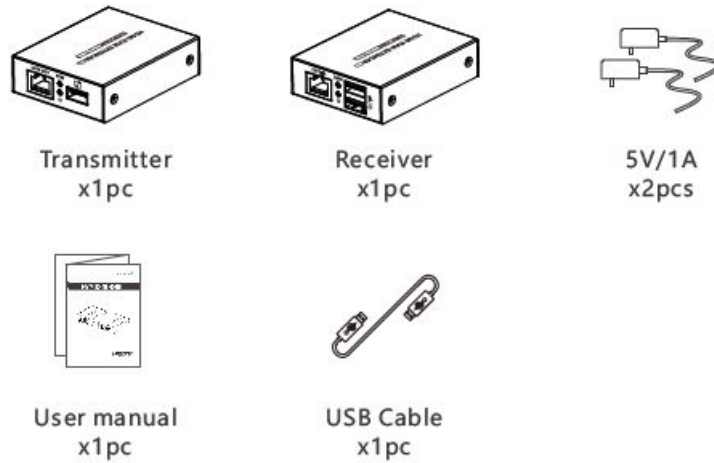


## Installation Requirements

1. HDMI source device (DVD, game console, set-top box, PC, etc.)
2. HDMI display devices like TV, and projectors with an HDMI port.
3. UTP/STP Cat6/6A/7 cable follows standard IEEE-568B.


## Interfaces

### Transmitter (TX)

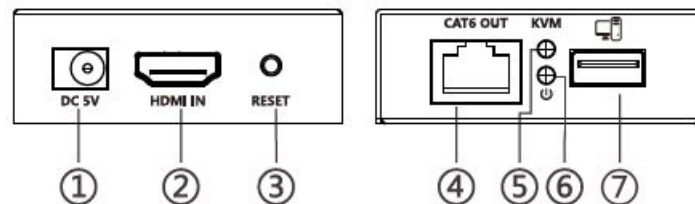

1. DC 5V Connect with 5V/1A power adapter
2. HDMI Input Connect with HDMI source device
3. Reset Button Press the button to restart the device
4. RJ45 Output Connect with CAT6/6A/7 network cable
5. **KVM Indicator**
  - **Light off:** the USB port and the computer have not established a connection
  - **Steady on:** the USB port is connected to the computer, but no KVM data is transmitted
  - **Light flash:** the KVM data is transmitting
6. **Power Indicator**
  - **Light flash:** it is powered on, but no video data is transmitted
  - **Steady on:** the video data is transmitting
7. USB-A Port Connect to the computer with a USB cable

### Receiver (RX)

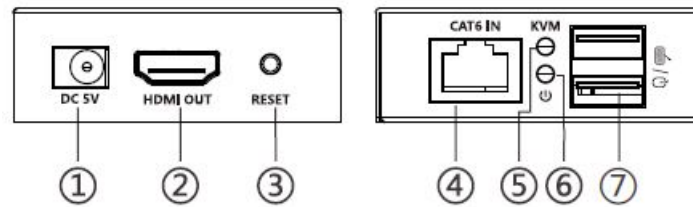


1. DC5V Connect with 5V/1A power adapter
2. HDMI Output Connect with HDMI display device
3. Reset Button Press the button to restart the device
4. RJ45 Input Connect with CAT6/6A/7 network cable
5. **KVM Indicator**
  - **Light off:** the USB port and the computer have not established a connection
  - **Steady on:** the USB port is connected to the computer, but no KVM data is transmitted
  - **Light flash:** the KVM data is transmitting
6. **Power Indicator**
  - **Light flash:** it is powered on, but no video data is transmitted
  - **Steady on:** the video data is transmitting
7. USB-A Port Connect to the mouse and keyboard

## Installation Procedures

1. The network cable should follow the standard of IEEE-568B. It is recommended to select a network cable with less loss and crosstalk.
  1. Orange/white
  2. Orange
  3. Green/white
  4. Blue
  5. Blue/white
  6. Green
  7. Brown/white
  8. Brown



## 2. Connection

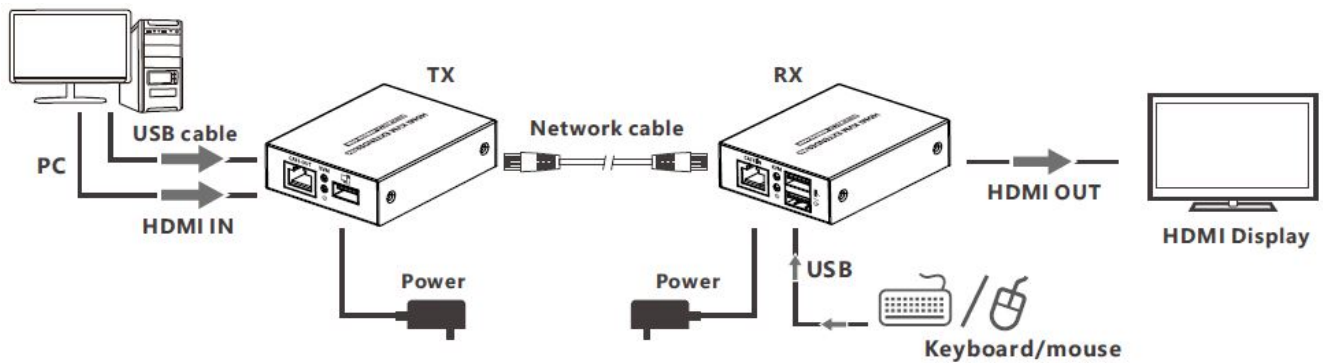

### 3. Connection instruction

1. Connect the HDMI port of the source device to the HDMI IN port of the transmitter via an HDMI cable.
2. Connect the CAT6 OUT port of the transmitter and the CAT6 IN port of the receiver via a network cable.
3. Connect the HDMI port of the display device to the HDMI OUT port of the receiver via an HDMI cable.
4. Use the USB cable to connect the computer to the transmitter, and connect the mouse and keyboard to the USB port of the receiver.
5. Plug the power into the devices to get started.

### FAQ

**Q: Why there is no image/image or sound is not played smoothly?**

**A**

1. Press the "RESET" button on the receiver to restart the device.
2. Reconnect the devices with a shorter network cable.

**Q: Why does the power indicator always flash?**

**A:**

1. Check whether the network cable uses IEEE-568B wiring standards.
2. Check whether the source device and the transmitter are connected well.
3. Reset the transmitter or receiver and connect it again.

**Q: Why does the receiver's power indicator stay on but there is no image output?**

**A:**

1. Press the "RESET" button on the receiver to restart the device.
2. Check whether the display device and the receiver are connected well.
3. Reconnect the network cable or re-power the receiver.

### Specification

Items		Specification
Power Supply	Voltage/Current	DC5V/1A
	Power consumption	TX<3W RX<3W
HDMI Performance and Interface	HDMI compliance	HDMI 1.4
	HDCP compliance	HDCP 1.4


HDMI Performance and Interface	HDMI resolution	800×600, 1024×768, 1280×720, 1280×960, 1366×768, 1440×900, 1680×1050, 1920×1080, 480i@60Hz, 480p@60Hz, 576i@50Hz, 576p@50Hz, 720p@50/60Hz, 1080i@50/60Hz, 1080p@24/25/30/50/60Hz, 3840×2160@24/25/30Hz
	Audio formats	DTS, DTS-HD, PCM, LPCM
	HDR	Supported
	EDID through	Supported
	Input and output TMDS signal	0.7~1.2Vp-p(TMDS)
	Input and output DDC signal	5Vp-p(TTL)
Transmission Distance	Cat6/6A/7	1080p@60Hz transmission 70 meters 4K@30Hz transmission 40 meters
Protection Level	Electrostatic protection of the whole machine	Implementation of the standard: IEC61000-4-2 1a Contact discharge level 2 ±4KV 1b Air discharge level 3 ( ±8KV)

Operating Environment	Working temperature	-20~60°C
	Storage temperature	-30~70°C
	Humidity (no condensation)	0 90%RH
Body Properties	Dimension	75.0(L) x 60.0(W) x 20(H) mm
	Weight	TX: 123g RX: 125g
	Color	Black

## Disclaimer

The product name and brand name may be registered trademarks of related manufacturers. ™ and ® may be omitted from the user manual. The pictures in this user manual are just for reference. The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. We reserve the right to make changes without further notice to a product or system described herein to improve reliability, function, or design.

## Documents / Resources

	<a href="#">Lenkeng LKV372KVM HDMI and USB Extender</a> [pdf] User Manual LKV372KVM HDMI and USB Extender, LKV372KVM, HDMI and USB Extender, USB Extender, Extender
---	--