Skip to content

Manuals+

User Manuals Simplified.



- **4 Installation Safety Information**
- **5 Thermostat Installation**
- 6 Dimension (mm)
- **7 Electrical Installation**
- **8 Product Information**
- **9 Your Guarantee**
- 10 Documents / Resources
- 11 Related Posts



LENNOX 10F81 WIFI Touch Screen Thermostat User Guide

<u>Home</u> » <u>Lennox</u> » LENNOX 10F81 WIFI Touch Screen Thermostat
User Guide

Contents hide

- 1 LENNOX 10F81 WIFI Touch Screen Thermostat
- 2 Safety & General Information
- 3 Installation

LENNOX 10F81 WIFI Touch Screen Thermostat




Safety & General Information

Please read carefully...

- This product is only suitable for use electric radiators and underfloor heating up to 16 Amp.
- Do not throw away packaging until you have located and confirmed that you have all included parts and the product is in good condition.
- Check the device for damage before installation.
- If the device is found to be damaged it should not be used.
- Do not let children operate the device without supervision of an adult.
- This thermostat has no serviceable parts, never dismantle the element as this will invalidate the warranty and could lead to injury.

Installation


Tools required for installing:




Installation Safety Information

- Always disconnect the power before installing or removing the thermostat.
- This thermostat must be installed by a qualified or fully competent person.
- The thermostat should only be connected to a power outlet in good condition.
- All local electrical regulations must be adhered to when installing the thermostat.


Thermostat Installation

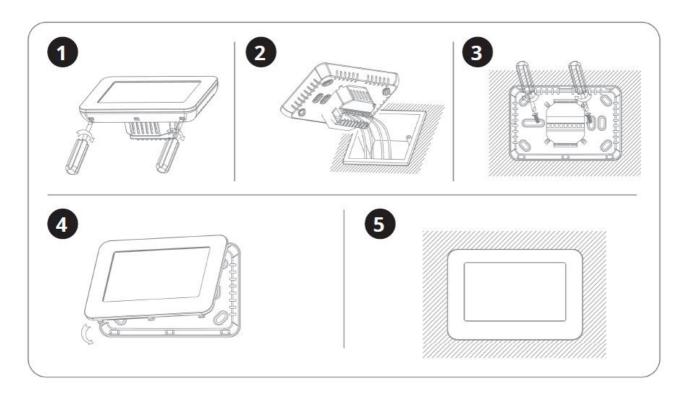

Dimension (mm)

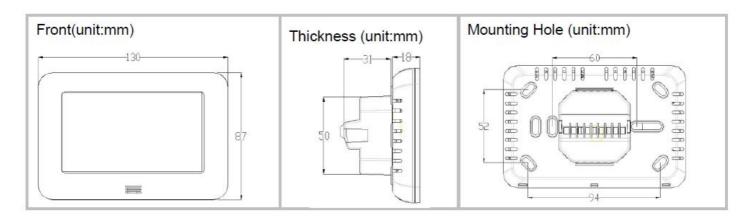

Electrical Installation

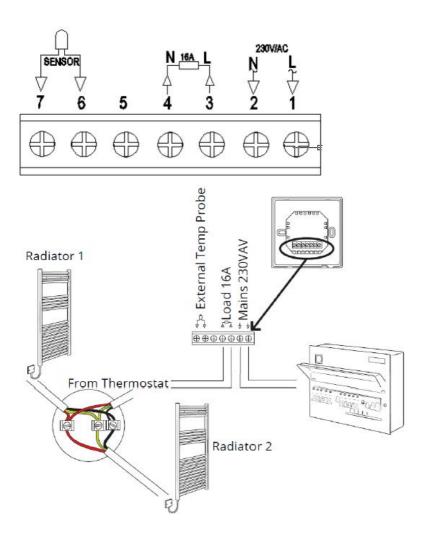

Main Connection

Brown (Live) - Connection to number 1 (L) Blue (Neutral) - connection to number 2 (N)

Load

Live (Brown) – connection to number 3 (L) Blue Neutral_ – Connection to number 4 (N) External Temp Sensor – Connection to 6 & 7

Product Information

Voltage 230V, Backlight Colour 50/60Hz

Load Current 16A Sensor

Max NTC3950 10Kohms at 25° C Temp. Setting Range 5° 35°C Accuracy $\pm 0.5^{\circ}$ C

Ambient Protection Class IP30 0~50°C

Relative Humidity 85% Housing ABS to UL94-5 fire retardant plastic

Aftercare

Clean any marks with a soft dry or damp cloth, for stubborn stains please clean with mild soapy water and dry with a soft cloth. DO NOT use abrasive or acidic cleaners, if you are unsure, please contact us first.

Your Guarantee

- This product is covered by a 2 year guarantee.
- The guarantee starts from the date of purchase.
- The guarantee covers you against issues caused as a result of manufacturing related issues, it does not apply to issues that are found to be a result of poor installation.
- Labour costs for installation of the product are not covered under this warranty.

Recycling and Disposal

Please recycle the packaging in accordance with your local government regulations on waste handling, and follow the same advice at the end of the products life. Do not recycle the element in your general waste. Product – ABS. Packaging – Cardboard.

Contact us

Unit 1 & 2 Dawson Ct Burnley Lancashire BB11 5UB

Documents / Resources



Manuals+,

- home
- privacy