

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [TECKNET](#) /

› [TECKNET TK-KB041 Rechargeable Slim Wireless Keyboard User Manual](#)

TECKNET TK-KB041

TECKNET TK-KB041 Rechargeable Slim Wireless Keyboard User Manual

Model: TK-KB041

[Overview](#) [What's in the Box](#) [Setup](#) [Operating](#)
[Instructions](#) [Maintenance](#) [Troubleshooting](#) [Specifications](#) [Warranty & Support](#)

1. PRODUCT OVERVIEW

The TECKNET TK-KB041 is a versatile, slim wireless keyboard designed for multi-device compatibility and comfortable typing. It offers both 2.4GHz USB-A and Bluetooth connectivity, allowing seamless switching between up to three devices. Its low-profile scissor-switch keys provide a quiet and fluid typing experience, while the integrated numeric keypad enhances productivity. The keyboard features a rechargeable battery with long standby time and power-saving auto-sleep functionality.



Figure 1: TECKNET TK-KB041 Slim Wireless Keyboard.

2. WHAT'S IN THE BOX

- Wireless Keyboard (Model TK-KB041) x 1
- USB-C Charging Cable x 1
- User Manual x 1
- USB-A Receiver (stored in the keyboard's back slot) x 1

3. SETUP INSTRUCTIONS

3.1 Powering On the Keyboard

1. Locate the ON/OFF switch on the side of the keyboard.
2. Slide the switch to the "ON" position.

ULTRA SLIM DESIGN



Ultra Thin
0.3 in



Light Weight
0.88 lbs



Figure 2: The keyboard's ultra-slim profile, highlighting its compact design.

3.2 Connecting via 2.4GHz USB-A Receiver

1. Locate the USB-A receiver stored in the magnetic slot on the back of the keyboard.
2. Plug the USB-A receiver into an available USB port on your computer or device.
3. The keyboard should automatically connect.



Figure 3: Location of the USB-A receiver slot on the back of the keyboard.

3.3 Connecting via Bluetooth

1. Ensure the keyboard is powered on.
2. Press and hold the **Fn** key and one of the Bluetooth channel keys (**Fn+1**, **Fn+2**, or **Fn+3**) for 3 seconds. The corresponding Bluetooth indicator light (B1, B2, or B3) on the keyboard will start blinking, indicating it's in pairing mode.
3. On your device (computer, tablet, smartphone), go to Bluetooth settings.
4. Search for available devices and select "TK-KB041" (or similar name) from the list.
5. Follow any on-screen prompts to complete the pairing process. The indicator light on the keyboard will stop blinking and remain solid for a few seconds, then turn off, indicating a successful connection.

CONNECT UP TO 3 DEVICES

USB-A+Dual BT Connect



Figure 4: The keyboard connected to multiple devices via Bluetooth and USB-A.

4. OPERATING INSTRUCTIONS

4.1 Switching Between Connected Devices

The keyboard supports connecting to up to three devices via Bluetooth and one via 2.4GHz USB-A. To switch between devices:

- For Bluetooth devices: Press **Fn + 1**, **Fn + 2**, or **Fn + 3** to switch to the corresponding Bluetooth-paired device.
- For 2.4GHz USB-A device: Press **Fn + 4** to switch to the device connected via the USB-A receiver.

4.2 Operating System Switching

The keyboard is compatible with Windows, macOS, iOS, and Android. To optimize key functions for your operating

system:

- For Windows: Press **Fn + W**
- For macOS: Press **Fn + E**
- For iOS: Press **Fn + Q**
- For Android: Press **Fn + R**



Figure 5: Keyboard layout highlighting function keys and OS switch keys.

4.3 Multimedia Function Keys (F1-F12)

The F1-F12 keys have secondary multimedia functions. To use these functions, press the **Fn** key simultaneously with the desired F-key.

- F1: Home
- F2: Search
- F3: Select All
- F4: Copy

- F5: Paste
- F6: Cut
- F7: Previous Track
- F8: Play/Pause
- F9: Next Track
- F10: Mute
- F11: Volume Down
- F12: Volume Up

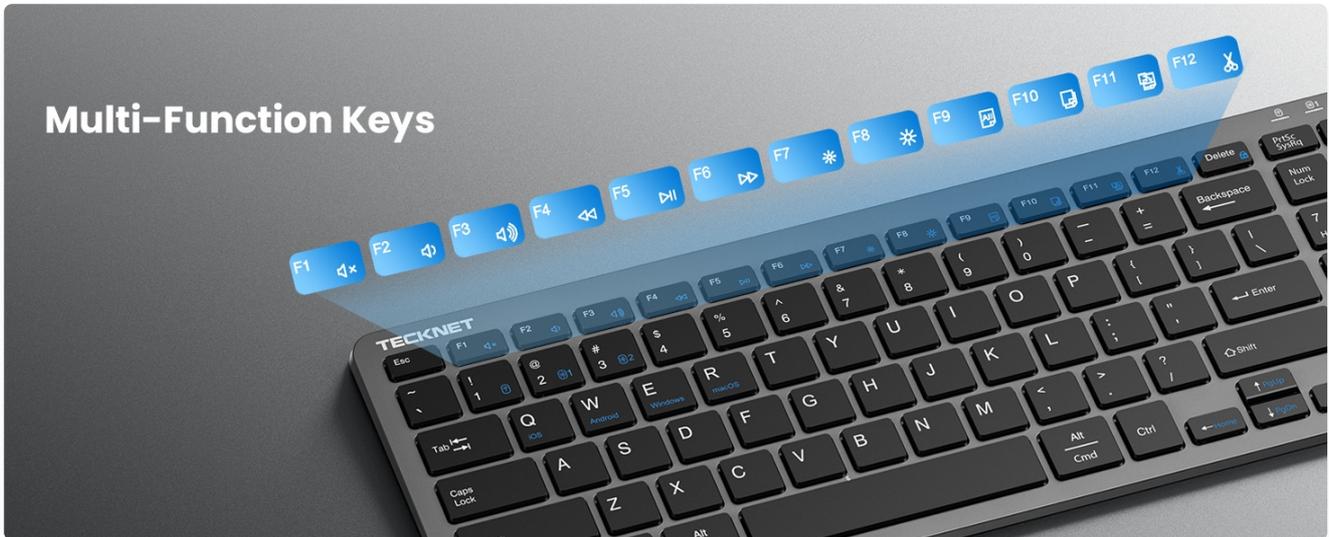


Figure 6: Illustration of the multimedia function keys (F1-F12).

4.4 Indicator Lights

The keyboard features several indicator lights:

- **B1/B2/B3:** Bluetooth connection indicators. Blink during pairing, solid when connected, then turn off.
- **Caps Lock:** Illuminates when Caps Lock is active.
- **Num Lock:** Illuminates when Num Lock is active.
- **Charging State:** A red light indicates charging. A green light indicates fully charged.
- **Low Battery:** The charging state indicator will blink blue when the battery is low, signaling that a recharge is needed.

5. MAINTENANCE

5.1 Charging the Keyboard

The keyboard has a built-in 280mAh rechargeable battery. To charge:

1. Connect the provided USB-C charging cable to the USB-C port on the keyboard.
2. Connect the other end of the cable to a USB power source (e.g., computer USB port, USB wall adapter).
3. The charging indicator light will illuminate red during charging and turn green when fully charged.
4. A full charge takes approximately 2 hours and provides up to 200 hours of use or 90 days of standby time. The

keyboard can be used while charging.



Figure 7: USB-C charging port on the keyboard.

5.2 Cleaning

- Turn off the keyboard before cleaning.
- Use a soft, damp cloth to wipe the surface of the keyboard.
- Avoid using harsh chemicals or abrasive materials.
- For cleaning between keys, use compressed air or a soft brush.

5.3 Power-Saving Mode

The keyboard automatically enters sleep mode after 10 minutes of inactivity to conserve power. Press any key to wake it up.

6. TROUBLESHOOTING

6.1 Keyboard Not Connecting

- Ensure the keyboard is powered on.
- Check the battery level; recharge if necessary.
- For 2.4GHz connection: Ensure the USB-A receiver is securely plugged into your device. Try a different USB port.
- For Bluetooth connection:
 - Ensure Bluetooth is enabled on your device.
 - Put the keyboard into pairing mode (Fn + 1/2/3 for 3 seconds).
 - Remove any previous "TK-KB041" pairings from your device's Bluetooth list and try pairing again.
 - Ensure the keyboard is within the 33ft (10m) operating range.

6.2 Keys Not Responding

- Check the connection (USB-A or Bluetooth) as described above.
- Ensure the keyboard battery is charged.
- Restart your device and try reconnecting.

6.3 Incorrect Key Output

- Ensure the correct operating system mode is selected (Fn + Q/W/E/R).
- Check your device's language and keyboard layout settings.

7. PRODUCT SPECIFICATIONS

Feature	Detail
Model Number	TK-KB041
Connectivity Technology	2.4GHz USB-A, Bluetooth
Compatible Devices	PC, Laptop, Mac, MacBook, Tablet, Smartphone, iPhone, iPad (Windows, macOS, iOS, Android)
Battery Capacity	280mAh (Rechargeable)
Charging Time	Approx. 2 hours
Operating Time	Up to 200 hours
Standby Time	Up to 90 days
Operating Range	Up to 33 feet (10 meters)
Keyboard Type	Low-profile Scissor Switch

Product Dimensions	14.42 x 5 x 0.46 inches (36.63 x 12.7 x 1.17 cm)
Item Weight	14.1 ounces (400 grams)
Material	Plastic
Color	Black

8. WARRANTY AND SUPPORT

TECKNET provides 36-Month Support for registered products. If you encounter any problems in using the product, please reach out to the TECKNET professional customer service team for assistance.

For further support and warranty registration, please visit the official TECKNET website or contact their customer service directly.



Figure 8: TECKNET's commitment to technology and customer support.

9. VIDEO GUIDE

Your browser does not support the video tag.

Video 1: Official product video demonstrating the features and usage of the Tecknet Slim Rechargeable Bluetooth Wireless Keyboard.