



LiftMaster CAP2D Connected Access Portal 2-Door Controller User Guide

[Home](#) » [LiftMaster](#) » LiftMaster CAP2D Connected Access Portal 2-Door Controller User Guide

Contents [[hide](#)]

- [1 LiftMaster CAP2D Connected Access Portal 2-Door Controller](#)
- [2 Smart Access,](#)
- [3 Popular features](#)
- [4 Managing credentialed access](#)
- [5 Control for gates](#)
- [6 Control for doors](#)
- [7 Product Ecosystem](#)
- [8 Specifications](#)
- [9 2 Year Warranty](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)

LiftMaster

LiftMaster CAP2D Connected Access Portal 2-Door Controller



Smart Access,

2-Door Controller

A behind the scenes powerhouse, the CAP2D provides a scalable cloud-based solution to easily manage and control access independently or as part of a complete system for resident only and community amenity access points.



Popular features

- **Multiple-Entrance Control:** With myQ® Community.
- **Eliminates Wiring:** Between controllers in multiple-entrance applications with myQ Community.

- **Universal Compatibility:** With 26-, 30- and 37-bit Wiegand-compatible readers, receivers and readers.
- **Expansive Capacity:** For 25,000 active credentials stored locally so residents can enter even when the Internet is down.
- **Remote Programming:** And activity monitoring using myQ Community.




- **Easy to Install:** In new or existing properties.
- **Backed-up Storage:** myQ Community ensures that databases are never lost and a backup lithium battery preserves the system's data during primary power outages.
- **Power over Ethernet (PoE):** Allows for flexibility of device placement. Email Alerts Over 75 alerts available including door ajar, door closed, door forced open, gate ajar and too many invalid PINs.
- **Real-time Activity Tracking:** With myQ Community.
- **Cloud-based Security:** Keeps data protected and safeguards resident information.

Managing credentialed access

myQ® Community cloud-based web platform lets you conveniently manage and control multiple access points across all communities in your portfolio from a single dashboard. With 24/7 ability to easily add/delete residents, assign access to specific entrances and receive real-time activity alerts you can maximize efficiency and improve operations.


Control for gates

Monitor and control any gated access point through the myQ Community web platform or with personalized vehicle tags and keypad credentials.

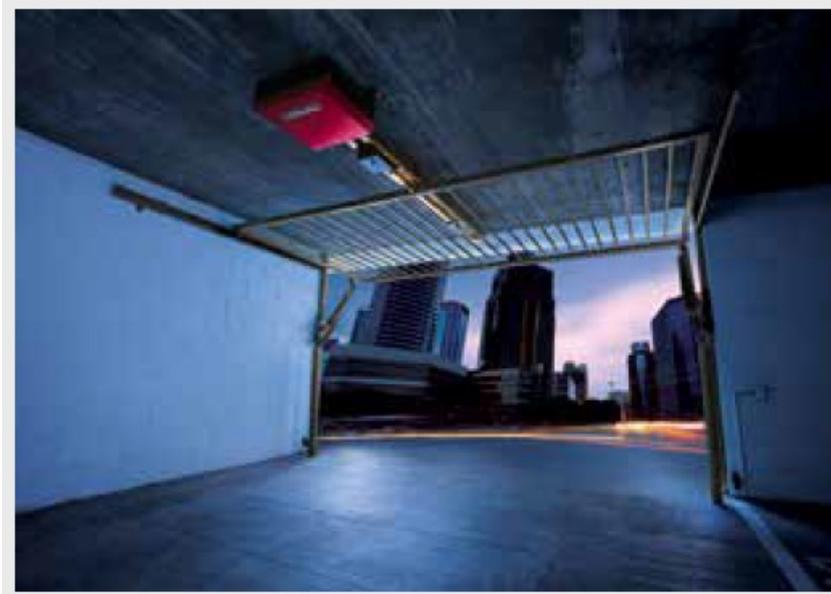


Control for doors

Enable secure, credentialed access to nearly any walk-through door in any residential or commercial application with proximity card readers or keypad credentials.

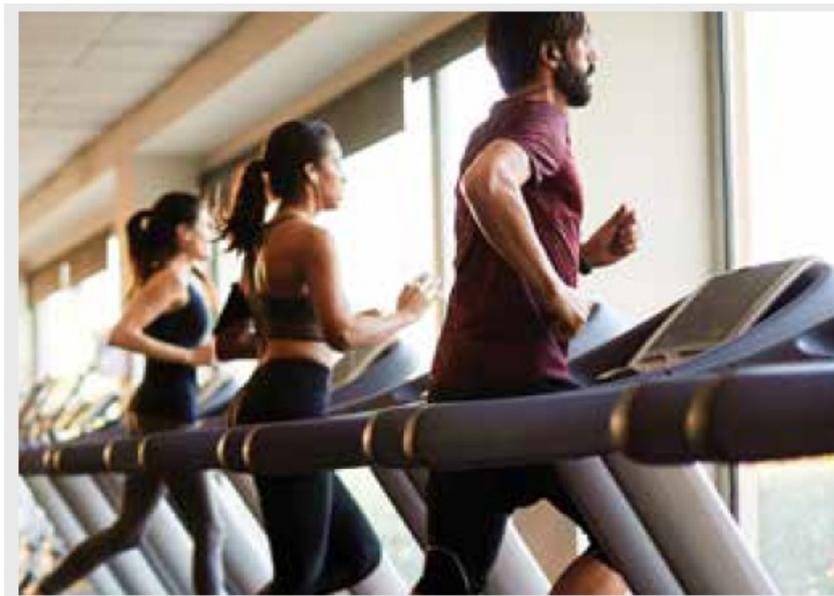

Product Ecosystem

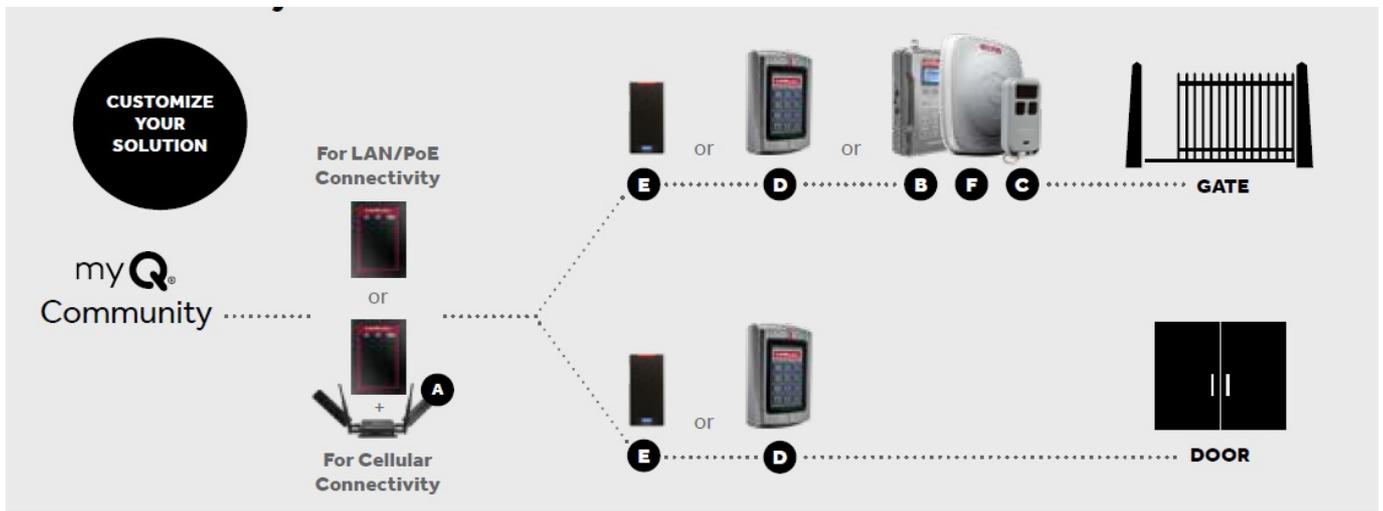

- **A: CAPCELL**

Cellular 4G/LTE Wi-Fi® Modem Connects CAP2D.

- **B: PPWR**

Passport Credentialed Receiver Security+ 2.0® receiver compatible with all standard Wiegand protocols.

- **C: PPV3M / PPK3PHM / PPLK1-X**

Passport Visor and Keychain Remote Controls with Credentialed IDs Offers residents a single solution to access gates, garages and other community entry points.*

- **D: KPR2000**

Wired Keypad and Proximity Reader Single-entry multi-function access controller with integrated keypad and card reader.


- **E: LMMC-MINI / LMPC2-ST**

Mini-Proximity Reader and Proximity Card For credentialed access.

- **F: LMSC1000 / LMUNTG / LMHNTG**

RFID Long-Range Reader and Vehicle Tags Reads RFID vehicle tags 20' – 30' away reducing vehicle congestion.

Specifications

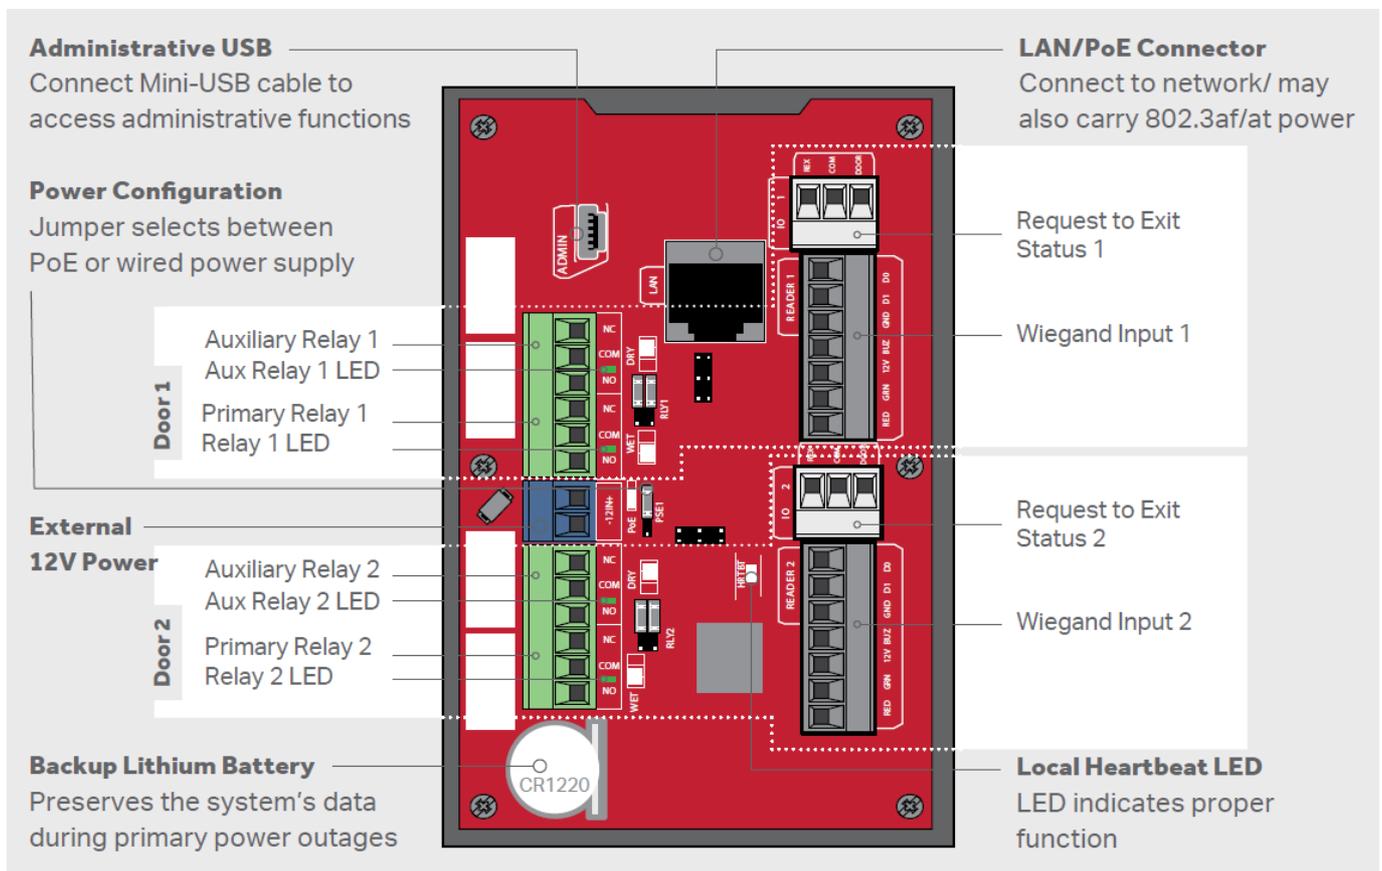

Capacities

- 2 controlled gates/doors
- 25,000 local resident capacity
- 6,000 local event history (FIFO) offline from host P Multiple, holiday and hold-open scheduling
- Compatible Wiegand Input formats: 26 Bit, 30 Bit, 37 Bit (HID) and 32 Bit (MiFare)
- No facility code limitations (1–256 for 26-Bit); feature available to ignore facility code

Mechanics

- Compact size mounts on standard single electrical-gang box or in a NEMA enclosure
- LED indicator lights communicate status

Operating Temperatures

- -31°F to 150°F (-35°C to 66°C)

Communication Internet (Dynamic or Static IP)

- DSL with at least 1 MB download speed
- Cellular (optional CAPCELL)

Power

- 12VDC, min. 1.5 amps (transformer not included) P PoE (802.3af) enabled network devices, 13 watts max. P

UL 294® Listed

- Backup lithium battery preserves the system's data during primary power outages

2 Year Warranty

- 1 Carton Shipping Details
- Dimensions: 7.5"W x 5.0"H x 3.0"D
- Contents: 1 CAP2D, miscellaneous hardware
- Weight: 1.0 lb.

Business partners

For Sales | 800.282.6225

For Technical and Billing Support | 877.247.6764 To Learn More | myQ.com/Community

Documents / Resources

	<p>LiftMaster CAP2D Connected Access Portal 2-Door Controller [pdf] User Guide 2-Door Controller, Porta, CAP2D, Connected Access, Controller</p>
--	--

References

- [Community | myQ](https://myQ.com/Community)