

[Manuals.plus](#) /

> [Gemmac](#) /

> Gemmac SM16 Sunrise Alarm Clock & Sound Machine User Manual

## Gemmac SM16

# Gemmac SM16 Sunrise Alarm Clock & Sound Machine User Manual

Model: SM16

## 1. PRODUCT OVERVIEW

The Gemmac SM16 is a versatile device combining a sunrise alarm clock, white noise sound machine, night light, and Bluetooth speaker. It is designed to enhance your sleep and wake-up experience with its various features.



Image: The Gemmac SM16 device showcasing its 4-in-1 multi-functional capabilities including mood light, wake-up light, Bluetooth speaker, sleeping machine with snooze, and alarm clock.

## 2. PACKAGE CONTENTS

Please check the package for the following items:

- Gemmac SM16 Digital Alarm Clock
- USB Charging Cable
- Remote Control (with 1 AA battery included)
- Instruction Manual

### 3. DEVICE LAYOUT AND CONTROLS

Familiarize yourself with the device's buttons and remote control functions.



Image: Top view of the Gemmac SM16 device showing the control buttons: Light, Volume Down/Previous Track, Power/Mode, Volume Up/Next Track, and Alarm Clock/Timer.

#### On-Device Buttons:

- **Light Button:** Controls night light on/off and brightness.
- **Volume Down / Previous Track:** Decreases volume; short press for previous track in Bluetooth mode.
- **Power / Mode Button:** Turns the device on/off; short press to cycle through modes (Alarm, Bluetooth, Sound Machine).
- **Volume Up / Next Track:** Increases volume; short press for next track in Bluetooth mode.
- **Alarm Clock / Timer Button:** Accesses alarm settings and sleep timer functions.

## Remote Control:

The included remote control provides convenient access to all functions. Refer to the remote control diagram for specific button functions.



Image: The remote control for the Gemmac SM16, showing buttons for power, volume, track control, light, and alarm settings.

## 4. SETUP

### 4.1 Charging the Device

The device is powered by a rechargeable battery. Before first use, fully charge the device using the provided USB cable. Connect the USB-C end to the device and the USB-A end to a compatible power adapter (not included).

### 4.2 Setting the Time

Instructions for setting the current time will be detailed here. *(Specific steps for time setting are not provided in the source data, but would typically involve pressing a 'Time Set' button and using +/- buttons.)*

### 4.3 Setting the Alarm

To set an alarm:

1. Press the **Alarm Clock / Timer Button** to enter alarm setting mode.
2. Use the **Volume Up (+)** and **Volume Down (-)** buttons to adjust the hour and minute.
3. Press the **Alarm Clock / Timer Button** again to confirm each setting.
4. Select your desired alarm sound and light intensity.

The device supports a snooze function. When the alarm sounds, press any button (except power) to activate snooze for 5 minutes.

Your browser does not support the video tag.

Video: This video demonstrates the wake-up light and alarm clock with snooze functionality of the Gemmac SM16.

## 5. OPERATING INSTRUCTIONS

### 5.1 Night Light Operation

The night light features 5 levels of brightness adjustment. Press the **Light Button** to cycle through brightness levels or turn the light on/off.



Image: A visual representation of the night light's 5-level brightness adjustment, showing the light intensity increasing from 10% to 100%.

## 5.2 White Noise Sound Machine

The device offers 20 soothing white noise options to aid sleep. Press the **Power / Mode Button** to switch to Sound Machine mode. Use the **Volume Up (+)** and **Volume Down (-)** buttons to cycle through the available sounds.

A sleep timer can be set for 30, 60, or 90 minutes, after which the sound will automatically turn off.

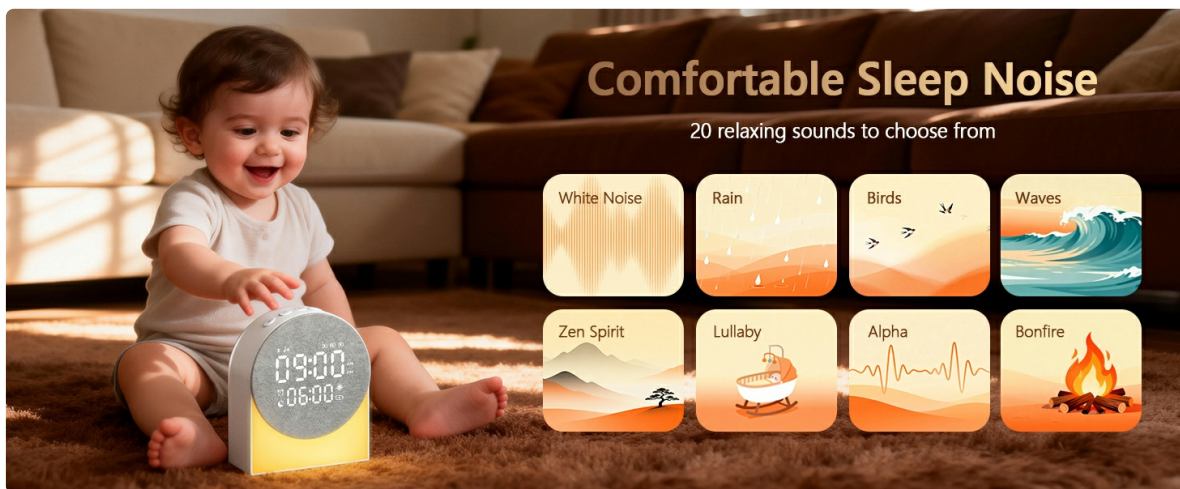


Image: A baby playing near the device, illustrating the "Comfortable Sleep Noise" feature with icons for various sounds like White Noise, Rain, Birds, Waves, Zen Spirit, Lullaby, Alpha, and Bonfire.

## 5.3 Bluetooth Speaker Functionality

To use the device as a Bluetooth speaker:

1. Press the **Power / Mode Button** until "BLU" appears on the display, indicating Bluetooth pairing mode.
2. On your smartphone or tablet, go to Bluetooth settings and select "Fuzecho" to connect.
3. Once connected, you can play audio from your device through the Gemmac SM16.
4. Use the **Volume Up (+)** and **Volume Down (-)** buttons to adjust volume, and short press them to switch tracks.

# Gradual Sunrise, Nature Wake UP

From 0% to 100% within 15 minutes, gradually brightening.



Image: The device connected via Bluetooth to a smartphone, displaying music playback, with musical notes indicating sound output.

## 6. MAINTENANCE

To ensure the longevity and optimal performance of your Gemmac SM16:

- Clean the device with a soft, dry cloth. Do not use liquid cleaners or abrasive materials.
- Keep the device away from water and high humidity.
- Avoid dropping the device or subjecting it to strong impacts.
- Store in a cool, dry place when not in use for extended periods.

## 7. TROUBLESHOOTING

### 7.1 Device Not Turning On

Ensure the device is fully charged. Connect it to a power source using the USB cable and allow it to charge for at least 30 minutes before attempting to power on again.

### 7.2 Bluetooth Connection Issues

- Make sure the device is in Bluetooth pairing mode ("BLU" displayed).
- Ensure your smartphone/tablet's Bluetooth is enabled and within range (up to 10 meters).
- Try unpairing and re-pairing the device from your phone's Bluetooth settings.

### 7.3 Alarm Not Sounding/Light Not Activating

- Verify that the alarm time is correctly set and enabled.
- Check the volume level for the alarm sound.
- Ensure the device is not in a mode that overrides the alarm (e.g., completely off).

## 8. SPECIFICATIONS

Feature	Detail
Brand	Gemmac
Model Number	SM16
Color	White
Display Type	Digital
Product Dimensions (W x H)	1.57"W x 2.75"H
Item Weight	0.35 Pounds
Power Source	Battery Powered (Rechargeable)
Material	Acrylnitril-Butadien-Styrol (ABS)
Special Feature	LED Display, Sunrise Simulation, White Noise, Bluetooth Speaker
Included Components	Cable, Digital alarm clock, Instruction manual, Remote control

## 9. WARRANTY AND SUPPORT

Gemmac offers a refund and return policy within 30 days of purchase. For further assistance or inquiries, please refer to the seller's support channels or visit the official Gemmac store on Amazon: [Gemmac Store](#).