



SMAR Series

Surface-mount architectural remote unit



Contents [[hide](#)]

- [1 Standard features](#)
- [2 Photometric performance](#)
- [3 Dimensions](#)
- [4 Accessories](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)

Standard features

- Easy to install on the ceiling surface or pendant-mount (pendant kit sold separately)
- Thermoplastic decorative housing, white finish or optional black
- DC model accepts 6-24VDC input
- Two-wire universal AC input: 120-277VAC 50/60Hz
- High power factor rating making it compatible with central systems
- Four high-intensity LED with redundant connections; 140 lm/W
- Listed UL924 for damp locations: 50° to 104°F
- Warranty details at: www.lightalarms.com Optional features
- Fixed, square light distribution for area of rescue, up to 12 ft ceilings


Electrical ratings

Model	V	Hz	A	W	P. F.
AC	120-277VAC	50/60	0.06-0.035	7.3 -9.2	≥0.9
DC	6-24VDC	N/A	1.09-0.33	6.50 -7.25	N/A

Photometric performance

Unlike equipment with adjustable lights, the SMAR Series makes the installation faster and prevents errors leading to insufficient lighting on the path of egress.

The SMAR Series delivers a stable and consistent illumination making it easy to specify in a wide range of applications. The spacing of illumination ranges from 62 to 80 feet for standard units (corridor). The area-of-rescue option covers a square surface up to 729 ft² (27 ft x 27 ft).

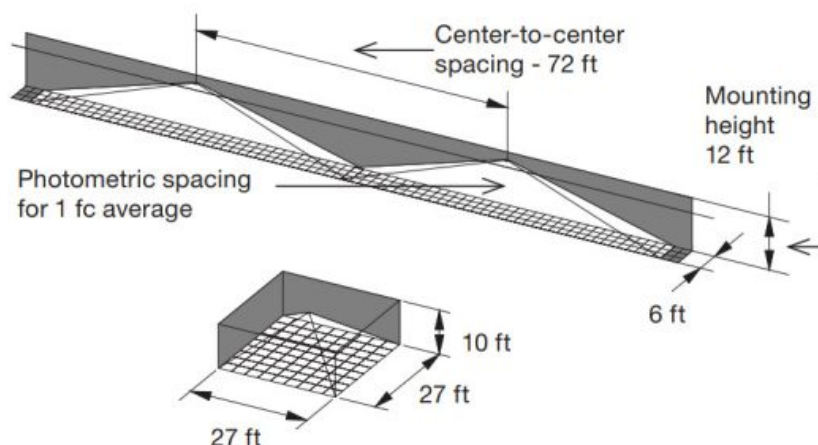


Spacing: standard unit – 6 ft wide corridor

Mounting height	Spacing center-to-center	Single unit coverage
8 ft	62 ft	57 ft
9 ft	68 ft	59 ft
10 ft	80 ft	77 ft
12 ft	72 ft	69 ft



Dimensions

(Dimensions are approximate and subject to change)

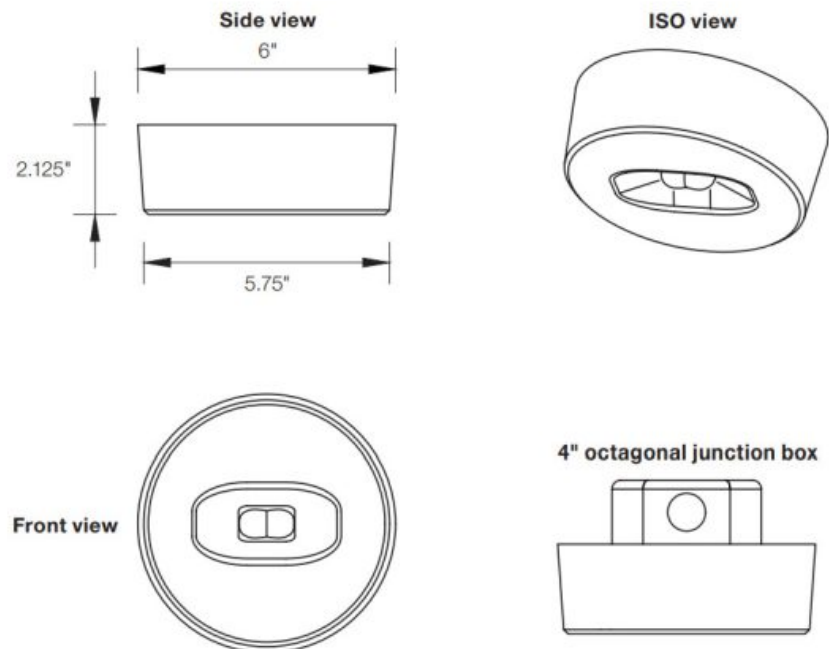

Accessories

(order as a separate item)

Description	Product code
Pendant white	GRA-P*-WH
Pendant black	GRA-P*-BK

Example: GRA-P12-WH

*Specify pendant lengths in increments of 6" (ex: 6", 12", 24", etc).

Other lengths available upon request. Consult your sales representative


Ordering format

Series	Color	Voltage	Options
SMAR= Surface mount architectural remote	W= Factory white B= Black	AC= 120 to 277VAC, 50/60Hz, 6.6/8.2W, P.F. ≥0.9 DC= 6 to 24VDC, 6.5W	Blank= Corridor lighting pattern SQ= Square lighting pattern.

Example: SMARWACSQ

©2025 ABB. All rights reserved. Rev: 05/2025

Documents / Resources

	Lightalarms SMAR Series Surface Mount Architectural Remote Unit [pdf] User Guide SMARWAC, SMARWDC, SMAR Series Surface Mount Architectural Remote Unit, SMAR Series, Surface Mount Architectural Remote Unit, Mount Architectural Remote Unit, Architectural Remote Unit, Remote Unit, Unit
---	---

References

- [User Manual](#)

■ Lightalarms

🔑 Architectural Remote Unit, Lightalarms, Mount Architectural Remote Unit, Remote Unit, SMAR Series, SMAR Series Surface Mount Architectural Remote Unit, SMARWAC, SMARWDC, Surface Mount Architectural Remote Unit, Unit

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.