



Lightcloud MVS50/LCB High Bay Low Voltage MVS Controller Instructions

[Home](#) » [Lightcloud](#) » Lightcloud MVS50/LCB High Bay Low Voltage MVS Controller Instructions 



Welcome High Bay Low Voltage
MVS Controller
MVS50/LCB
WE'RE HERE TO HELP:
1(844) LIGHTCLOUD
1(844) 544-4825

Contents

- [1 MVS50/LCB High Bay Low Voltage MVS Controller](#)
- [2 Specifications](#)
- [3 Setup & Installation](#)
- [4 Controlling your Lightcloud Blue Device](#)
- [5 Sensor Coverage](#)
- [6 Configuration](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

MVS50/LCB High Bay Low Voltage MVS Controller

Hello

The Lightcloud Blue High Bay Low Voltage MVS Controller is a controller with 12V AUX supply and intergrated with dual-technology motion detector and daylight sensor that can switch and dim both local and remote circuits. The Lightcloud Blue High Bay Low Voltage Controller can be quickly and easily installed on compatible LED fixtures.


Specifications

PART NUMBER MVS50/LCB	PRODUCT DIMENSIONS 2.125"D x 2.125"L x 1.43"H
WIRELESS Range 60 ft.	SENSOR COVERAGE 20 ft. diameter at 49 ft.
SENSOR TYPE Microwave (MVS)	SENSOR CONNECTION 3-pogo pin
ENVIRONMENT Indoor/Outdoor (IP65)	MOUNTING HEIGHT 49 ft.

Setup & Installation


1. Turn off power

WARNING

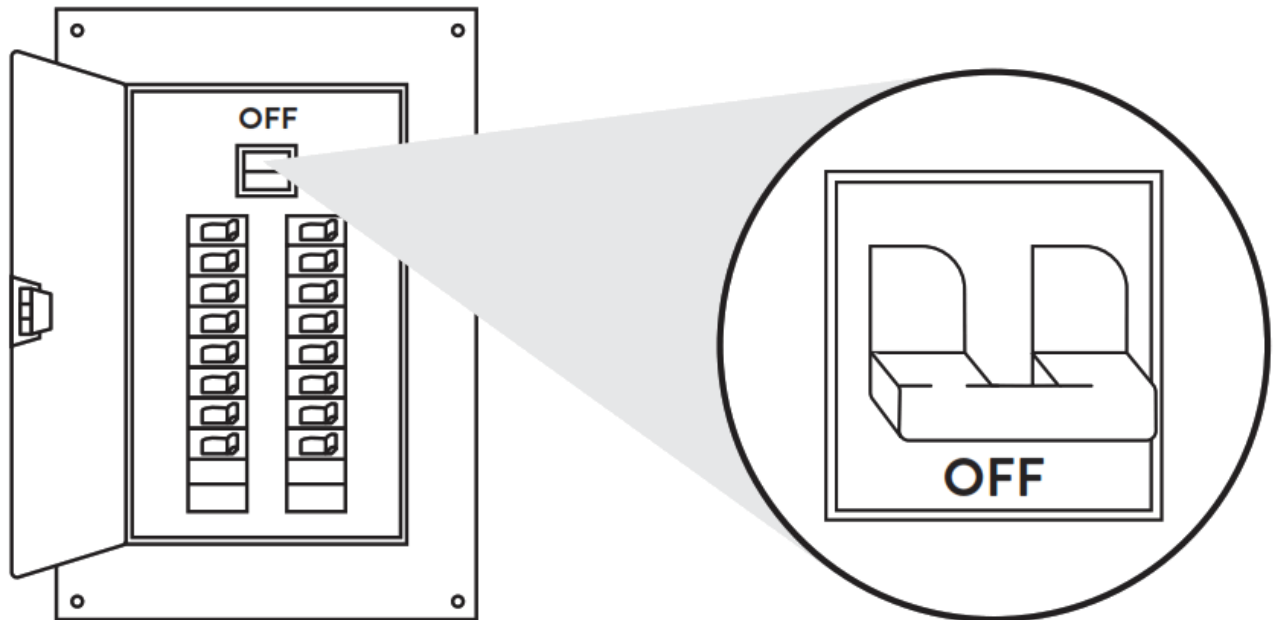

1a Find a suitable location

- Lightcloud Blue devices should be positioned within 60 ft. of each other.
- Building materials such as brick, concrete and steel construction may require additional Lightcloud Blue devices to extend around an obstruction.

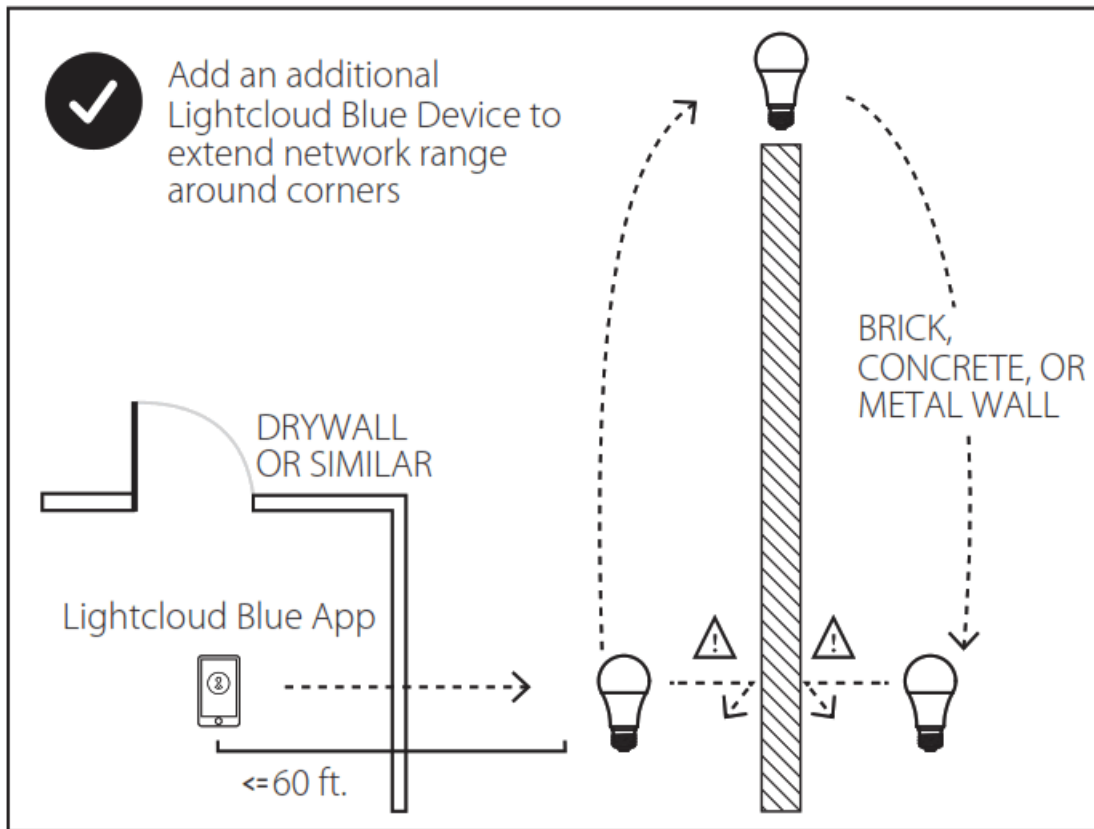


2. Wiring Diagram

Install the Lightcloud Blue High Bay Low Voltage MVS Controller by below wiring diagram.

Black White +12V 12VDC input

Pink GND 0/1-10V DIM

Purple DIM+ 0/1-10V DIM+

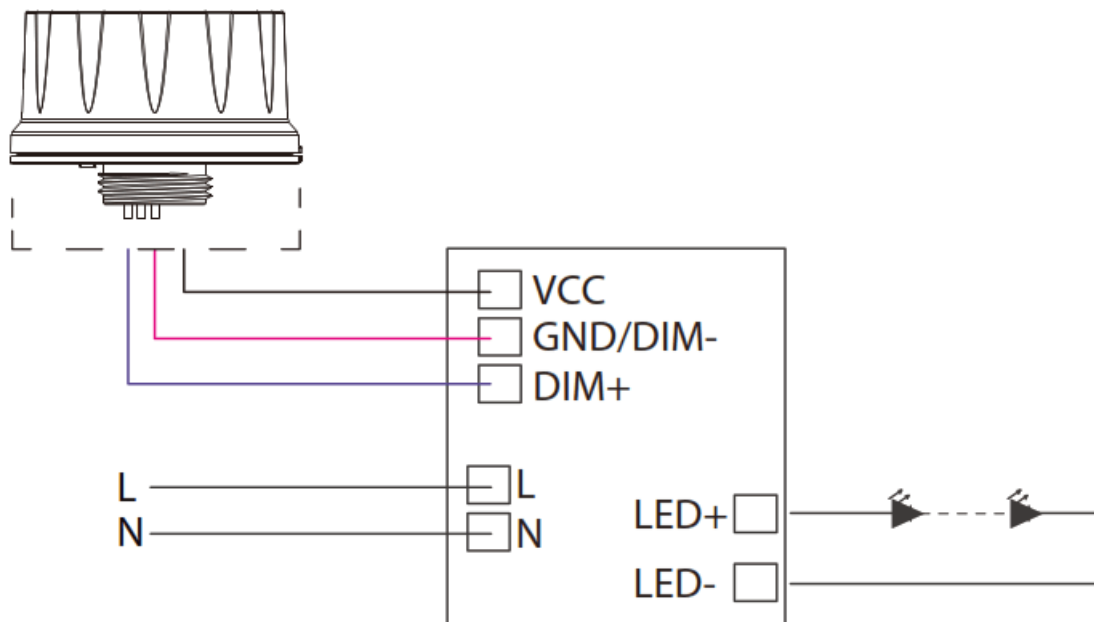


3. Install Luminaire

High Bay Low Voltage MVS Controller is only compatible with select sensor-ready fixtures.


Visit www.rablighting.com to see the full compatibility list.

3a Mount the High Bay Low Voltage MVS Controller to a compatible fixture. Unscrew the 1/2" knockout out with a screwdriver and screw on the High Bay Low Voltage MVS Controller.

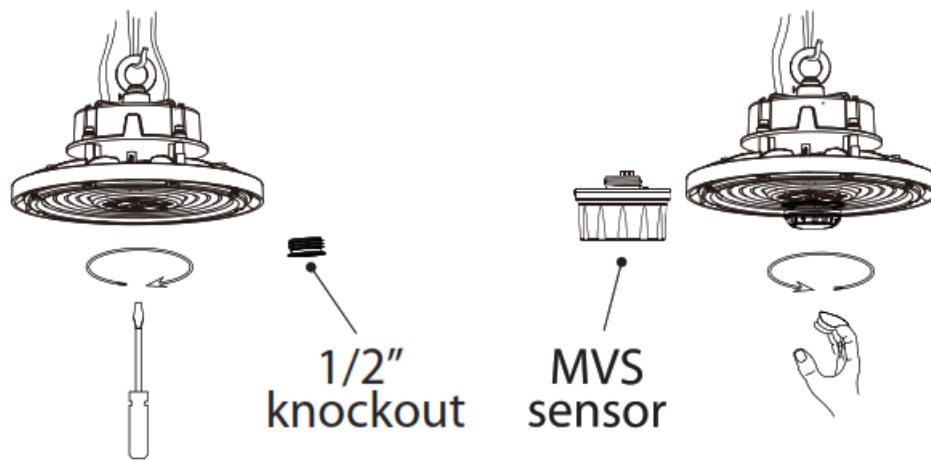

3b Mount the High Bay Low Voltage MVS Controller with Bracket (RAAS):

Screw the High Bay Low Voltage MVS Controller onto the Bracket (RAAS) and connect the Bracket (RAAS) to a 1/2" knockout on the fixture, see the section 2 Wiring Diagram for wiring instructions.

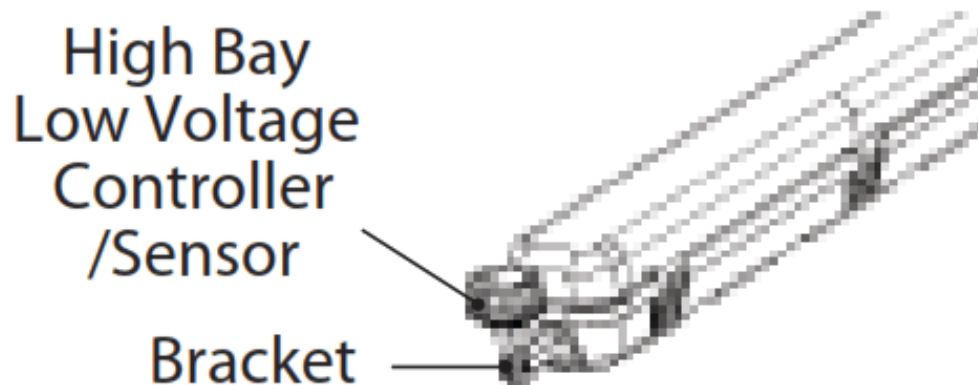


4. Turn power on

5. Enable Device Pairing Mode

If your Lightcloud Blue High Bay Low Voltage MVS Controller is already paired, you can reset it by using Rapid Reset Tool Method.

The rapid reset process must be done by professional electricians qualified by RAB. Reach out to your RAB sales manager to request a Rapid Reset Tool. The tool simply needs to be placed directly on side of device for 2 seconds.

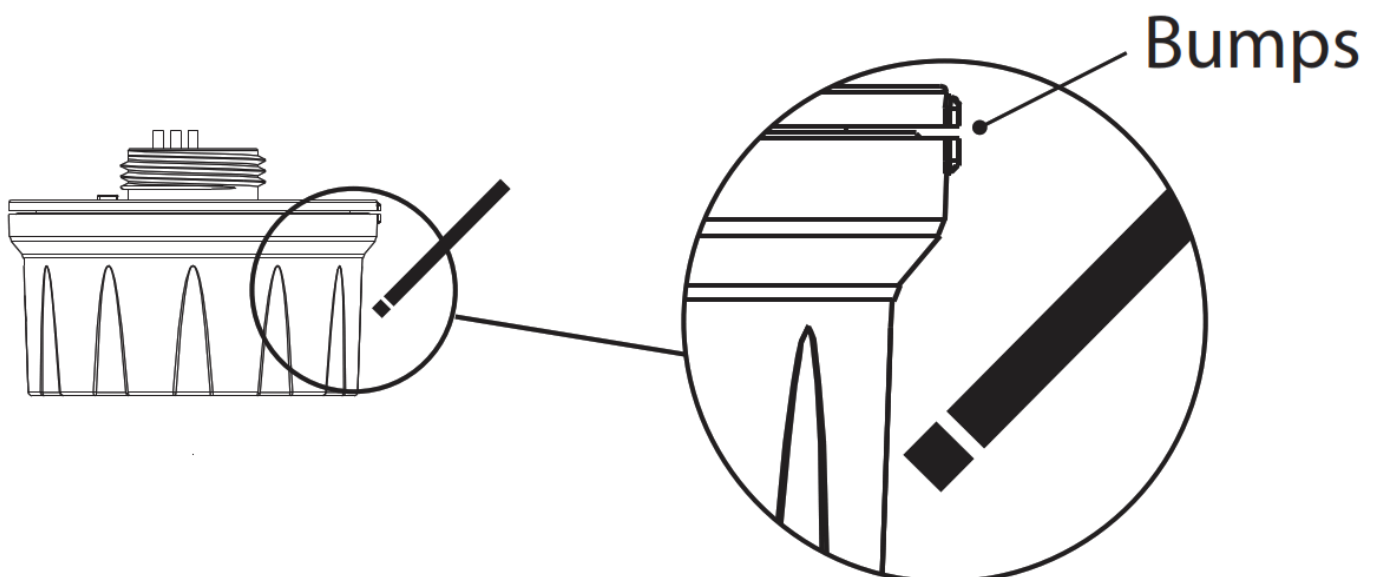


Controlling your Lightcloud Blue Device

1. Confirm your device is powered on.
2. Download the Lightcloud Blue app from the Apple® App Store or Google® Play store.




3. Launch the App and create an account.




4. Tap the “add device” icon in the app to start connecting devices.
5. Follow the remaining steps in the app. Create areas, groups, and scenes to organize and control your devices.
6. Adjust the Dim-to- Off Threshold (0-2V) to get the lowest dim level in the device setting. (Default threshold 1V)
7. You’re all set!

Sensor Coverage

Highest mounting height is 15m/49ft: this figure indicates the maximum distance at the highest mounting height with 100% sensitivity.

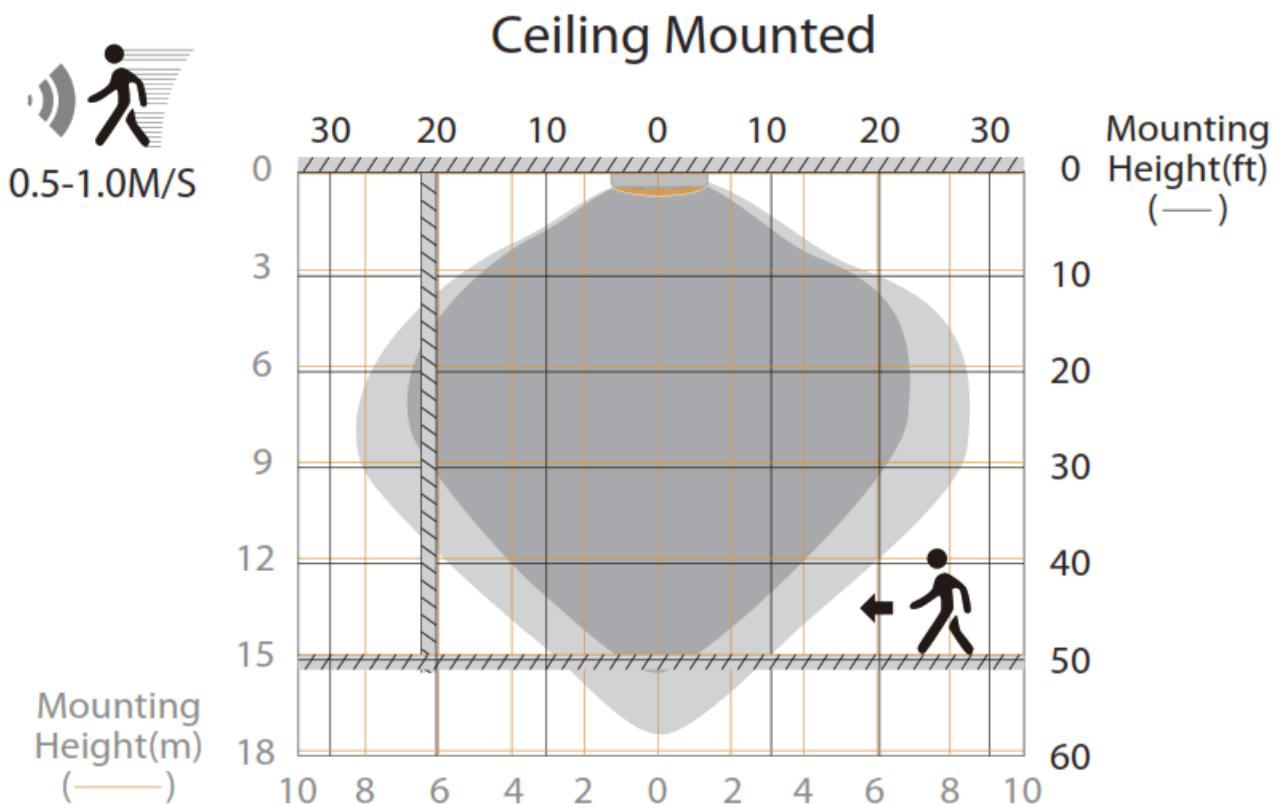

Wall Mounted

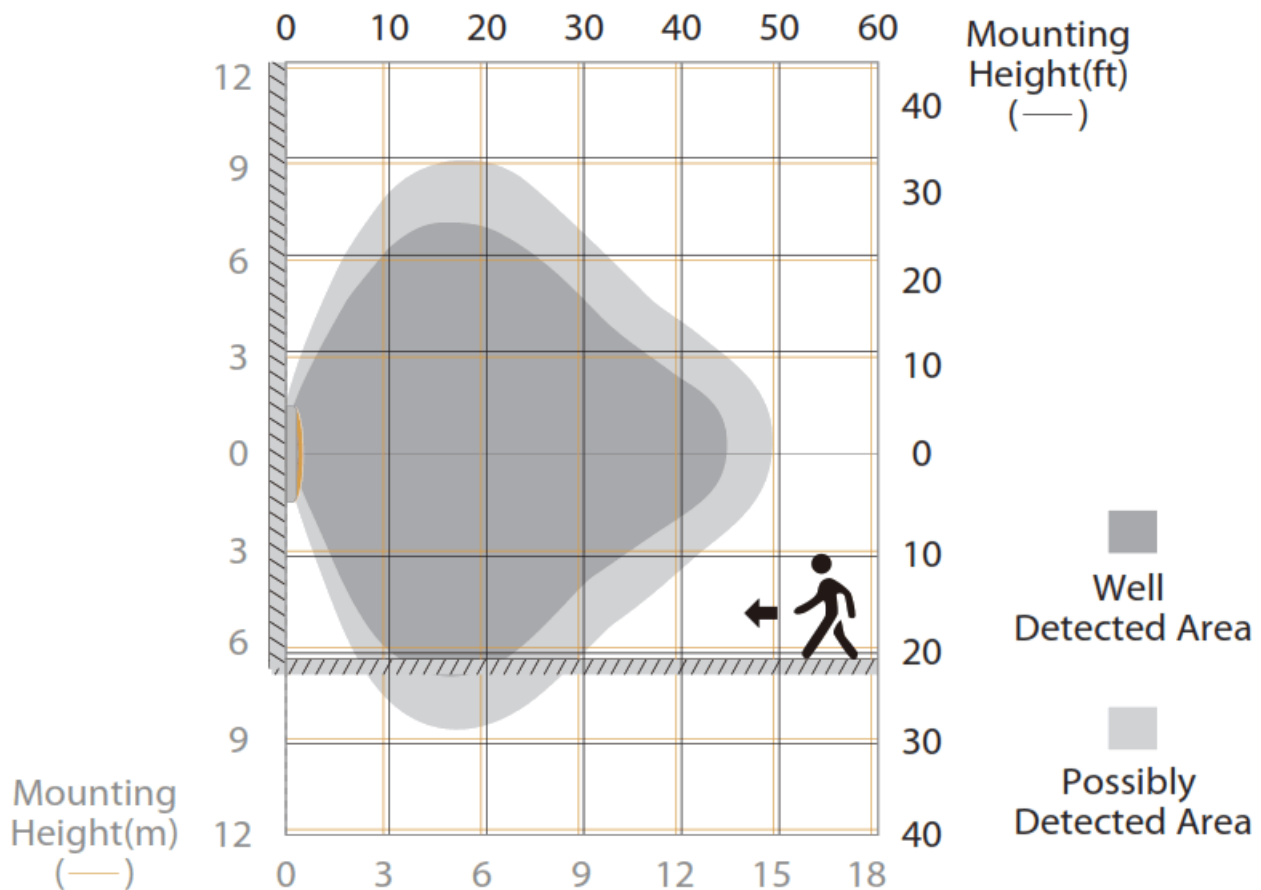

FCC Information:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Note: This device has been tested and found to comply with the limits for Class B digital devices pursuant to Part 15 Subpart B, of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential environment. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To comply with the FCC's RF exposure limits for general population / uncontrolled exposure, this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

CAUTION: Changes or modifications to this equipment not expressly approved by RAB Lighting may void the user's authority to operate this equipment.

Configuration

All configuration of Lightcloud Blue products may be performed using the Lightcloud Blue mobile app.

Learn more at www.rablighting.com

1(844) LIGHTCLOUD

1(844) 544-4825



Documents / Resources

A small image of a manual cover titled 'Welcome' with the Lightcloud logo and text: 'High Bay Low Voltage MVS Controller', 'MANUAL', '1(844) LIGHTCLOUD', and 'www.rablighting.com'.	<p>Lightcloud MVS50/LCB High Bay Low Voltage MVS Controller [pdf] Instructions</p> <p>MVS50 LCB High Bay Low Voltage MVS Controller, MVS50 LCB, High Bay Low Voltage MVS Controller, Low Voltage MVS Controller, Voltage MVS Controller, MVS Controller</p>
--	---

References

- [R Welcome to RAB](#)

[Manuals+](#)