

[Manuals.plus](#) /

› [iPazzPort](#) /

› iPazzPort Mini Air Mouse Remote Keyboard KP-T6 User Manual

iPazzPort KP-T6

iPazzPort Mini Air Mouse Remote Keyboard KP-T6 User Manual

Model: KP-T6

INTRODUCTION

This manual provides detailed instructions for the iPazzPort Mini Air Mouse Remote Keyboard, Model KP-T6. This device offers dual-mode connectivity (Bluetooth and 2.4GHz wireless), a full QWERTY keyboard, 7-color backlight, 6-axis gyroscope for air mouse functionality, and an IR learning feature. It is designed for use with Smart Android TV Boxes, Laptops, PCs, and Projectors.

PACKAGE CONTENTS

Verify that all components are present in the package:

- iPazzPort Mini Air Mouse Remote Keyboard (KP-T6)
- USB Wireless Receiver (for 2.4GHz connection)
- User Manual (this document)

So Small, So Powerful.

Smart Control Anywhere

Your Universal Companion For Every Screen

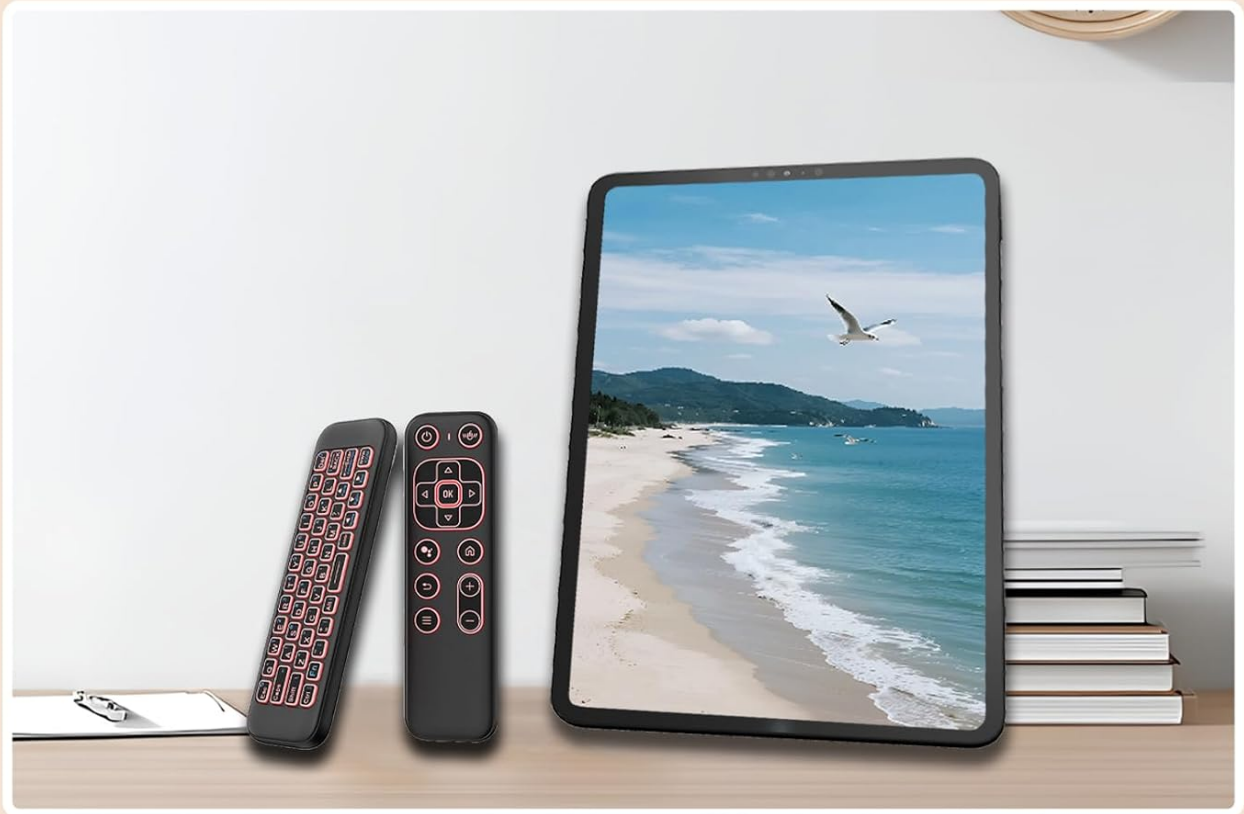


Image: The iPazzPort Mini Air Mouse Remote Keyboard and its USB wireless receiver, as typically found in the product packaging.

SETUP

1. Charging the Device

The remote keyboard is powered by a built-in rechargeable battery. Before initial use, ensure the device is fully charged.

1. Locate the Type-C charging port on the device.
2. Connect a standard USB-C charging cable (not included) to the port and a power source (e.g., USB wall adapter, computer USB port).
3. The charging indicator light will illuminate. Once fully charged, the light may change color or turn off.

Power That Lasts Uninterrupted FunBuilt-In Rechargeable Battery Power



Note:

**Charging cable is NOT included
Use any standard USB-C cable for charging**

Image: The iPazzPort remote control, highlighting its Type-C charging port for convenient recharging.

2. Connecting via 2.4GHz Wireless

For devices without Bluetooth or for a direct plug-and-play experience, use the 2.4GHz wireless connection.

1. Insert the USB wireless receiver into an available USB port on your target device (e.g., Smart TV, Android TV Box, PC).
2. On the iPazzPort remote, press and hold the **OK** button and the **BACK** button simultaneously.
3. Release the buttons when the indicator light changes from a rapid flash to a slow flash.
4. Bring the remote close to the USB receiver. The connection is successful when the indicator light on the remote turns off.

3. Connecting via Bluetooth

For devices with Bluetooth capability, you can connect the remote directly without the USB receiver.

1. On the iPazzPort remote, press and hold the **HOME** button and the **BACK** button simultaneously to initiate Bluetooth pairing mode.
2. Release the buttons when the indicator light changes from a rapid flash to a slow flash. The remote is now broadcasting its

Bluetooth signal.

3. On your target device (e.g., Laptop, Smart TV), navigate to the Bluetooth settings and search for available devices.
4. Select "T6-Remote" from the list of found devices to connect.
5. The indicator light on the remote will turn off upon successful connection.

Note: If pairing is not completed within 120 seconds, the remote will exit pairing mode. Repeat the steps if necessary.

Your browser does not support the video tag.

Video: This video demonstrates the Bluetooth pairing process for the iPazzPort Mini Air Mouse Remote Keyboard, showing how to activate pairing mode and connect to a device.

OPERATION

1. Air Mouse Function

The remote features a 6-axis gyroscope for precise air mouse control.

- Hold the remote in your hand and move it to control the cursor on your screen.
- The **OK** button acts as the left-click.
- To disable/enable the air mouse, press the dedicated mouse icon button (often located near the directional pad).

**Easy Grip. Precise Control.
Ergonomic Design For Single-Handed Use.
Accurate 6-Axis Air Mouse Navigation.**



Image: A hand holding the iPazzPort remote, illustrating its use as an air mouse to control a cursor on a projected display.

2. Keyboard Input

The reverse side of the remote features a full QWERTY keyboard for text entry.

- Flip the remote to access the keyboard side.
- The device automatically detects which side is facing up and disables input from the other side to prevent accidental presses.
- Use the keys for typing, similar to a standard keyboard.

Dual-Mode Wireless Air Mouse Keyboard

Bluetooth&2.4G Connectivity

Full QWERTY Keyboard For Rapid Text Input



Image: The iPazzPort Mini Air Mouse Remote Keyboard displaying its full QWERTY keyboard, which is backlit for visibility.

3. Backlight Control

The keyboard features a 7-color backlight for use in low-light conditions.

- To cycle through the 7 backlight colors or turn the backlight off, press the **Fn** key and the **Space** bar simultaneously.

Handheld Keyboard with 7-Color Backlight Customizable backlight colors Perfect for nighttime use adjustable backlighting ensures clear visibility



Image: The iPazzPort remote keyboard illuminated with its vibrant 7-color backlight, enhancing visibility in dark environments.

4. IR Learning Function

The remote can learn the Power key function from your existing TV remote, allowing you to consolidate controls.

1. Ensure the iPazzPort remote and your TV remote are charged and have working batteries.
2. Place the two remotes head-to-head, with their IR emitters facing each other, about 1-3 cm apart.
3. On the iPazzPort remote, press and hold the **IR Learning** button (often marked with a power symbol or specific IR icon) until the indicator light starts to flash slowly.
4. Press the **Power** button on your TV remote. The indicator light on the iPazzPort remote should flash rapidly, then become solid, indicating successful learning.
5. Press the **IR Learning** button again on the iPazzPort remote to save the learned function and exit learning mode.

Infrared Learning Function that let you replicate TV and projector remote controls Easily manage power, volume, and input source functions—all in one keyboard



Image: The iPazzPort remote positioned to learn an infrared signal from another remote control, illustrating the IR learning function.

MAINTENANCE

Cleaning

To maintain the appearance and functionality of your remote keyboard:

- Use a soft, dry cloth to wipe the surface of the device.
- For stubborn dirt, slightly dampen the cloth with water or a mild, non-abrasive cleaner.
- Avoid using harsh chemicals, solvents, or abrasive materials, as these can damage the finish or internal components.

Battery Care

To prolong the life of the built-in rechargeable battery:

- Avoid fully discharging the battery frequently.
- Charge the device regularly, even if not in constant use.
- Store the device in a cool, dry place when not in use for extended periods.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Device not responding	Low battery; Not paired; USB receiver not connected (2.4GHz)	Charge the device; Re-pair the device (see Setup section); Ensure USB receiver is securely plugged in.

Problem	Possible Cause	Solution
Air mouse cursor is erratic or not moving	Air mouse function disabled; Interference; Device needs calibration	Press the mouse icon button to enable air mouse; Move closer to the receiver/device; Try restarting the remote.
Keyboard input not working	Remote is on the wrong side; Not paired	Ensure the keyboard side is facing up; Re-pair the device.
Backlight not changing colors	Incorrect key combination	Press Fn + Space simultaneously.
IR learning fails	Remotes too far apart; Incorrect procedure; Low battery	Ensure remotes are 1-3 cm apart, IR emitters aligned; Follow IR learning steps precisely; Charge both remotes.
Limited compatibility with certain Smart TVs	Proprietary software limitations	This device may have limited compatibility with some Smart TVs (e.g., Samsung, LG) that use proprietary operating systems. Test with a wired keyboard first to confirm basic compatibility.

SPECIFICATIONS

Feature	Detail
Model Number	KP-T6
Connectivity Technology	Bluetooth, 2.4GHz USB
Dimensions (L x W x H)	15.75 x 1.42 x 0.51 cm
Weight	82 g
Battery Type	Lithium-Ion (rechargeable)
Maximum Range	10 Meters
Special Features	Backlit (7-color), Lightweight, 6-Axis Gyroscope (Air Mouse), IR Learning
Compatible Devices	Smart Android TV Boxes, Laptops, PCs, Projectors, Tablets

WARRANTY AND SUPPORT

iPazzPort products come with a worry-free warranty. For any setup assistance, troubleshooting, or product-related inquiries, please contact our support team. Refer to the product packaging or the official iPazzPort website for specific warranty details and contact information.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question