



---

[Home](#) » [Linksys](#) » **Linksys 100007 Velop Pinnacle 2.0 Router User Guide** 

**Contents** [ [hide](#) ]

- [1 Linksys 100007 Velop Pinnacle 2.0 Router](#)
- [2 Product Usage Instructions](#)
- [3 Specifications](#)
- [4 CONNECTION](#)
- [5 What do the lights mean](#)
- [6 Buttons and Switches](#)
- [7 CUSTOMER SERVICE](#)
- [8 FAQ](#)
- [9 Documents / Resources](#)
  - [9.1 References](#)

# Linksys®

## Linksys 100007 Velop Pinnacle 2.0 Router



## Specifications

- **Product Name:** Pinnacle 2.0 Router
- **Quantity:** 1-Pack
- **Part Number:** 8820-0xxxx

## Product Usage Instructions

### Set up for Unconfigured Node to Router

1. Disconnect your old router from your modem or gateway.
2. Scan the QR code to connect to your WiFi.
3. Restart your modem or gateway by unplugging it. Wait 3 minutes and plug it back in.

### Connecting the Router

1. Connect your Router to the modem using the provided Ethernet cable. Plug it into the Internet port on the Router.
2. Plug your Router into a power outlet and wait for it to start up. The Router light will blink blue and then turn solid blue once ready for setup.

### Setting Up the Router

1. Save the guide for future reference. Your default WiFi Name and Password are printed on the bottom of your Router.
2. Scan the QR code or visit [www.myrouter.info](http://www.myrouter.info) to set up your Router following the on-screen instructions.
3. The Router light will blink white during setup and turn solid white once setup is complete.


## Specifications

- **Pinnacle 2.0 QSG**, 1-Pack
- **Part number:** 8820-0xxxx
- **Revision:** A00
- **Accordion** brochure
- **Overall size:** 360 x 229.5
- **Material:** 128gsm artwork paper + Matte AQ varnish
- **Grain:** Vertical
- **Tolerance:** +/- 0.8mm
- **Drawing Scale:** 1:1


## CONNECTION

### 1. Step 1

- Disconnect your old router from your modem or gateway.
- Restart your modem or gateway by unplugging it.
- Wait 3 minutes and plug it back in.

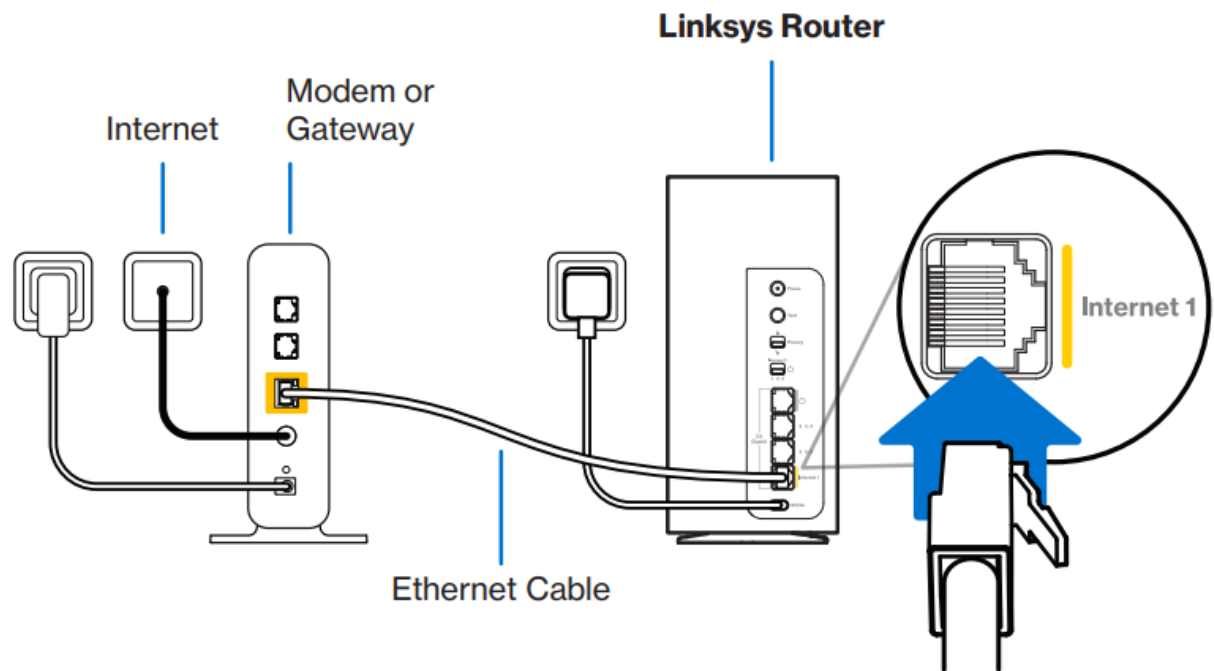


- Connect your Router to the modem.
- Use the provided Ethernet cable to connect the modem to the Internet port on the Router.
- Plug your Router into a power outlet.
- Give it a minute to start up. The Router light will blink blue as it is starting up and turn solid blue once ready for setup.

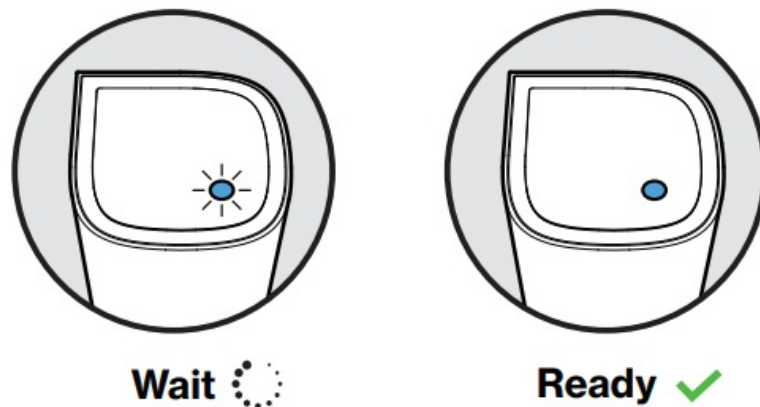

## 2. Step 2

- Scan the QR code to connect to your WiFi.

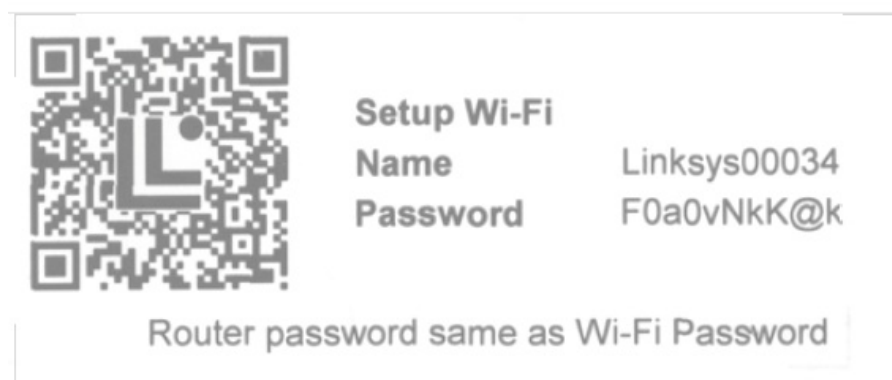

- Save this guide for future reference. Your default WiFi Name and Password are

also printed on the bottom of your Router.

- Scan the QR code to set up your Router.
- Follow the on-screen instructions.
- Visit [www.myrouter.info](http://www.myrouter.info)
- Personalise your WiFi Name
- Enable Guest WiFi



- The Router light will blink white as it is being set up and turn solid white once setup is complete.
- **Unable to visit [www.myrouter.info](http://www.myrouter.info)?**
  1. Make sure your Router is connected to your modem, and the internet is available.
  2. Confirm that you are connected to your new Router's WiFi.
- **Receive an error message?**
  - Don't be concerned. Your connection is private, secure and encrypted. It's safe to proceed to 192.168.1.1.
  - This error only occurs when accessing a router using an HTTPS connection.
  - For more information, visit: <https://support.linksys.com/kb/article/65-en/>

## What do the lights mean



Off

- Not powered ON
- Night mode enabled: light turned off from 8:00 PM to 8:00 AM



Blue  
(blinking)

- Starting up



Blue

- Ready for setup



White  
(blinking)

- Setup in progress
- Firmware update in progress
- Changes to WiFi settings



White

- Set up and online



White  
(breathing)

- WiFi is paused
- Press Instant-Pause button to pause or unpair WiFi



Red  
(blinking)

- The Child Node is too far from the Router



Red

- No internet connection
- Check your internet connection



Yellow  
(blinking)


- Pairing failed



Yellow

- Instant-Test error
- Router restart required

## Buttons and Switches

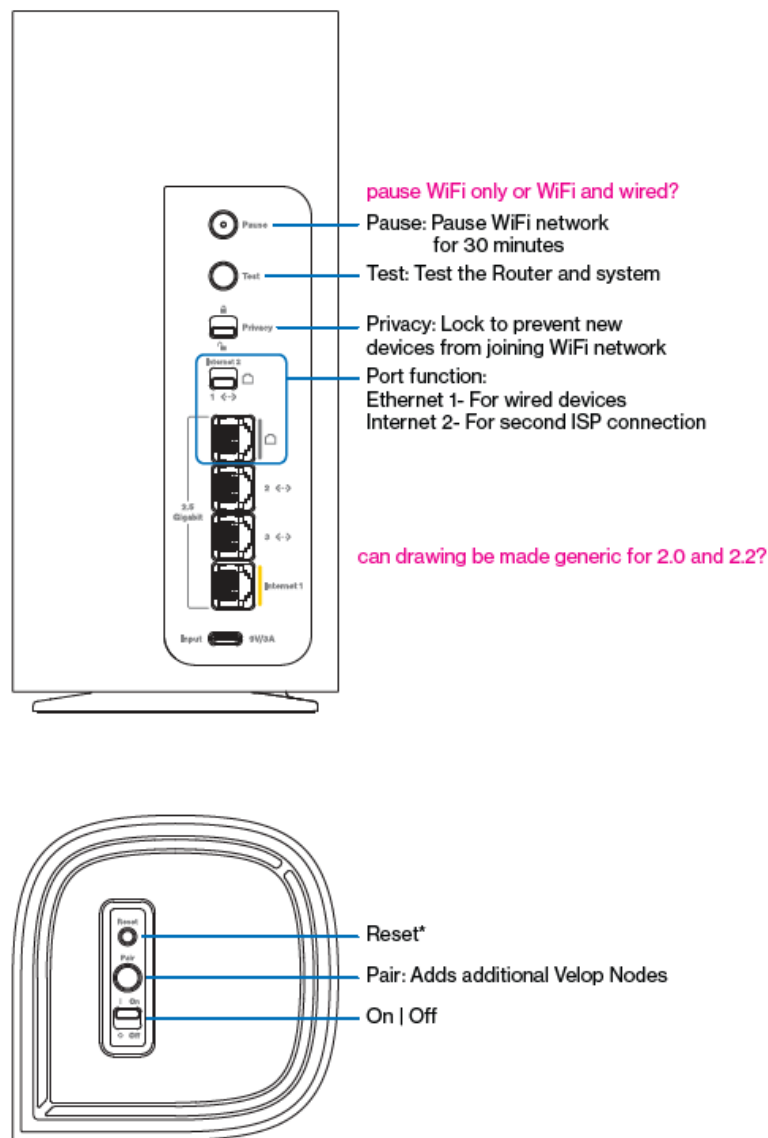

- Factory resetting your Router will restore the default WiFi Name and Password (printed on the bottom of the Router) and remove any connections to Child Nodes.
- Visit [Linksys.com/support](https://linksys.com/support) for factory reset instructions.
- The Linksys Mobile App is not supported by this product.
- 8820-0xxxx Rev.A00
- Factory resetting your Router will restore the default WiFi Name and Password (printed on the bottom of the Router) and remove any connections to Child Nodes.

## CUSTOMER SERVICE

- Visit [Linksys.com/support](https://linksys.com/support) for factory reset instructions.


## Need help?

- Visit [Linksys.com/support](https://linksys.com/support)



FAQ

Documents / Resources

|   |   |
|---|---|
|  | <a href="#">Linksys 100007 Velop Pinnacle 2.0 Router [pdf]</a> User Guide<br>100007, 2AYRA-100007, 2AYRA100007, 100007 Velop Pinnacle 2.0 Router, 100007 Velop, Pinnacle 2.0 Router, 2.0 Router, Router |
|---|---|

References

- [User Manual](#)

Linksys  
100007, 100007 Velop, 100007 Velop Pinnacle 2.0 Router, 2.0 Router, 2AYRA-100007, 2AYRA100007, linksys, Pinnacle 2.0 Router, router

Leave a comment

Your email address will not be published. Required fields are marked \*

Comment \*

Name

Email



Website

☐ Save my name, email, and website in this browser for the next time I comment.

**Post Comment**

**Search:**

e.g. whirlpool wrf535swhz

**Search**

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.