



LUMASCAPE LINEALUX L3 LS9032 Foundation Instruction Manual

[Home](#) » [LUMASCAPE](#) » LUMASCAPE LINEALUX L3 LS9032 Foundation Instruction Manual 

Contents

- [1 LUMASCAPE LINEALUX L3 LS9032 Foundation](#)
- [2 Please read and follow all safety instructions carefully. Failure to do so will void warranty](#)
- [3 LINEALUX L3 LS9032 Foundation](#)
- [4 Assembly Instructions](#)
- [5 Wiring Designations](#)
- [6 DALI \(5-Core\) – CE Market](#)
- [7 Non-Dimmable \(3-Core\)- UL Market](#)
- [8 0-10 V \(5-Core\) – UL Market](#)
- [9 Dimensions](#)
- [10 Documents / Resources](#)
- [11 Related Posts](#)



LUMASCAPE LINEALUX L3 LS9032 Foundation



Please read and follow all safety instructions carefully. Failure to do so will void warranty


WARNING – Product Warranty is void if product is not installed as per installation instructions and in compliance with all local and provincial codes.

- Ensure installation complies with local electrical rules and regulations.
- All electrical work must be performed by a licensed electrician.
- Protective earth; protective ground (symbol 7).
- All luminaires may become hot. Use discretion on where the luminaire is mounted. Take care when setting luminaire as it may become hot.
- Luminaire should only be used complete with protective shield. If protective shield is cracked, immediately stop using luminaire. Isolate light source, keep it dry and immediately contact the manufacturer for replacement of protective shield (symbol 11).
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer, their service agent or a similar qualified person in order to avoid a hazard.
- The light source contained in this luminaire shall only be replaced by the manufacturer, their service agent or a similar qualified person.
- Do not stare at the operating light source. The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 46' (14 m) is not expected (symbol 13)
- Basic insulation has been maintained between line voltage and the control conductors.
- To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.
- Ensure mains input power is surge protected.
- Never make or break connections while the circuit is energized.
- Do not make modifications or alter the product.
- Keep luminaire clean and free of debris.
- Only clean with warm water.
- Do not use chemicals or abrasives to clean luminaire as this may void the product warranty.
- Connections are to be kept clean and dry at all times.
- Suitable for use indoors or outdoors.


LINEALUX L3 LS9032 Foundation

- **MODEL** LS9032
- **PART NUMBER** LS9032 – 12D xxx xx xx x x 01 xx xx xxx LS9032 – 12D xxx xx xx x x 09 xx xx xxx
- **INSTALLATION TYPE** LINEAR GRAZER
- **IP RATING** IP66/67 (Passes IP68 Test)
- **SUPPLY VOLTAGE** 220-240 ~Vac, 50 Hz 120/277 ~Vac, 60 Hz
- **INSTRUCTIONS COVER** Single Color (Non-Dimmable) Single Color Dimming (Dali, 0-10 V)
- **DIMENSIONS** (LxWxH) As per included drawings
- **WEIGHT** 6.2 lbs (2.8 kg) for 4 ft section


Tools Required

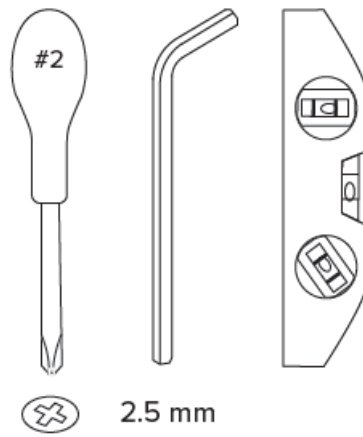


Included Components



Instructions

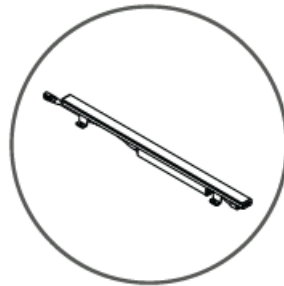


Luminaire

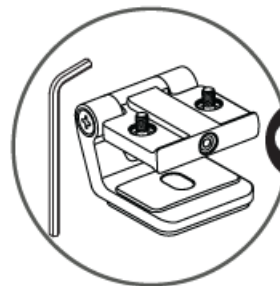

Adjustable Bracket








OR

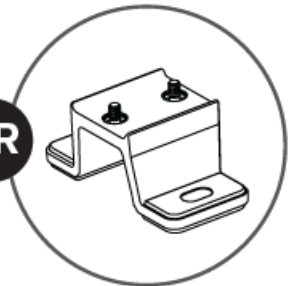


Fixed Bracket

- CAUTION Risk of Electric Shock
- Do Not Use Power Tools on Screws
- Keep Away from Flammable Materials
- Keep Electronics Free From Dirt and Moisture
- Do Not Hose or Pressure Clean
- Do Not Use Silicone On Outside Surface
- Do Not Cut Cable to the Luminaire

Assembly Instructions

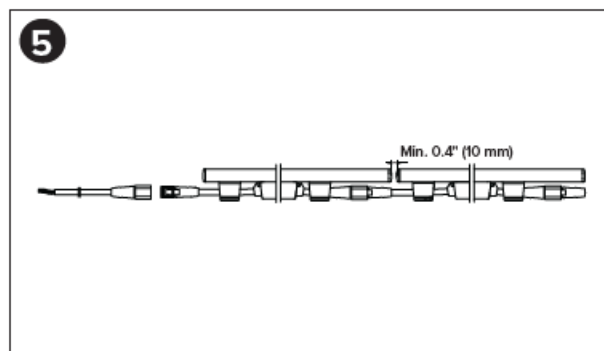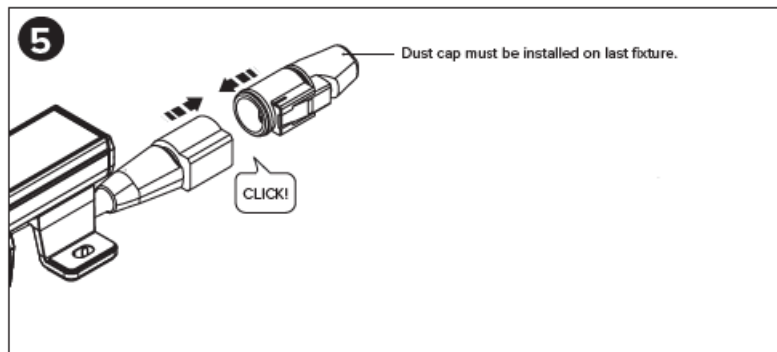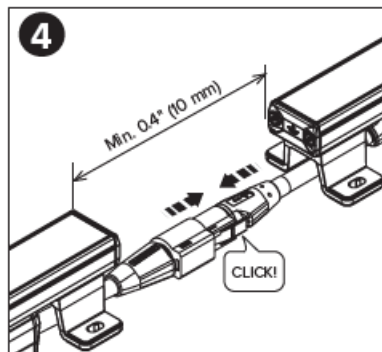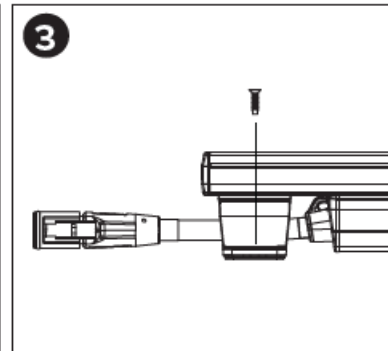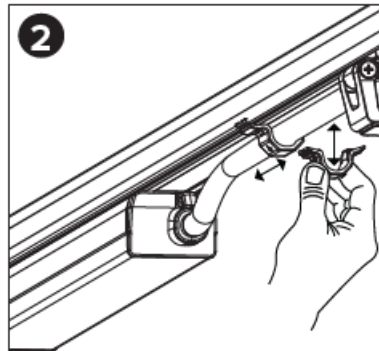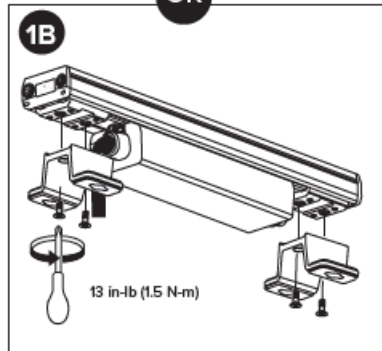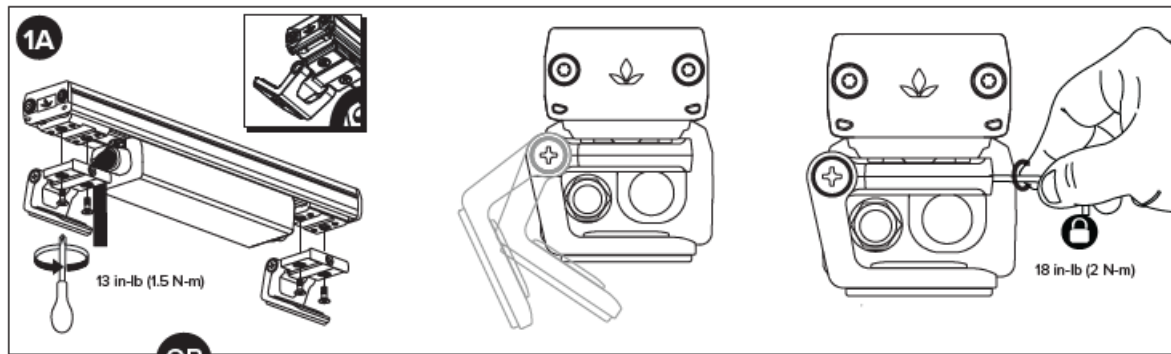

Asymmetric Optics

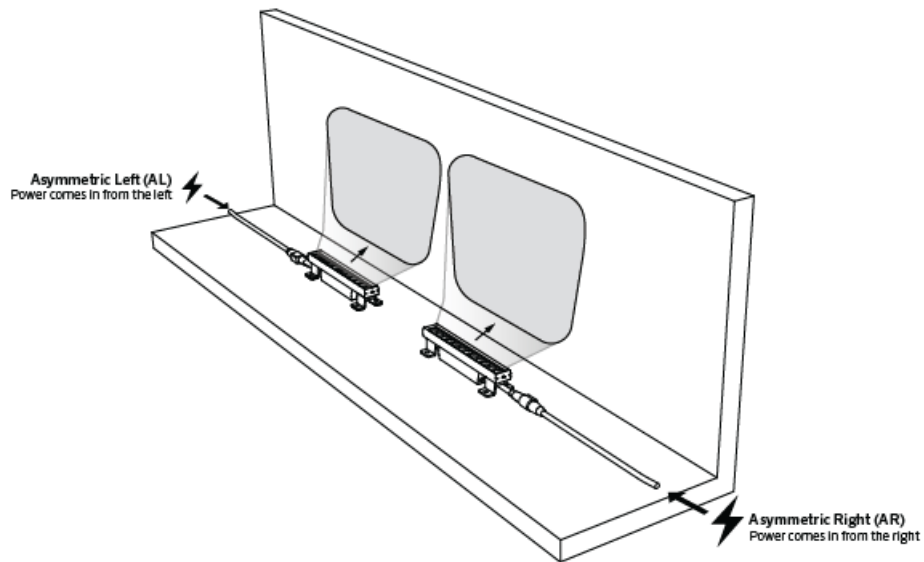

Wiring Designations

Non-Dimmable (3-Core) – CE Market

- Designation Color
- Active Brown
- Neutral Blue
- Earth Green / Yellow

DALI (5-Core) – CE Market

Designation Color

- Active Brown
- Neutral Blue
- Earth Green / Yellow
- DALI + Grey
- DALI – Black

Non-Dimmable (3-Core)- UL Market

Designation Color



- Active Black
- Neutral White
- Earth Green

0-10 V (5-Core) – UL Market



Designation Color

- Active Black
- Neutral White
- Earth Green / Yellow
- 0-10 V + Purple
- 0-10 V – Grey

Dimensions

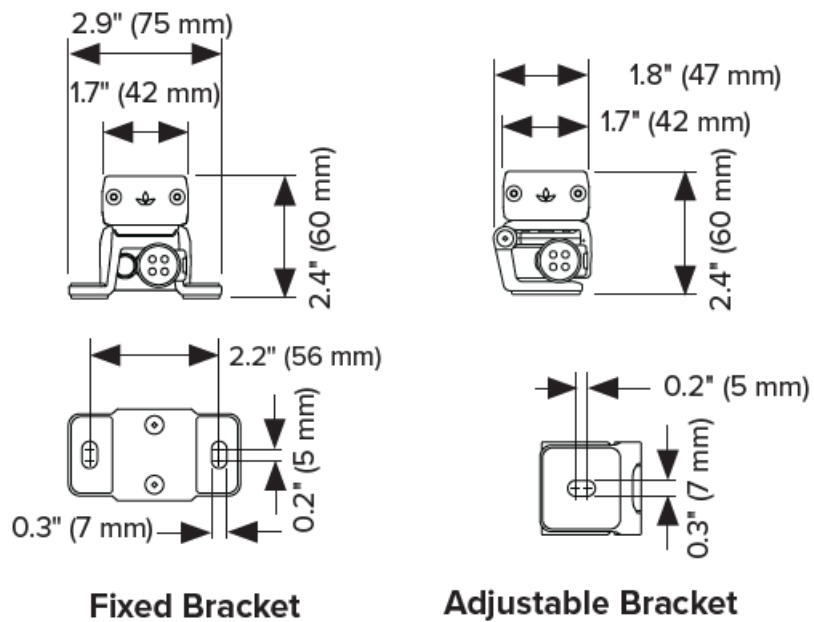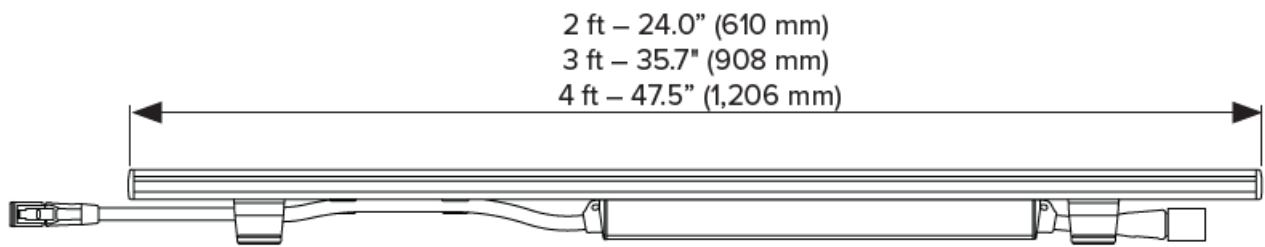

Luminaire Rotation

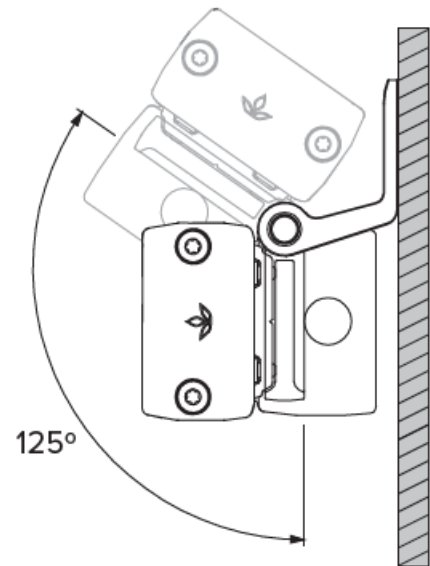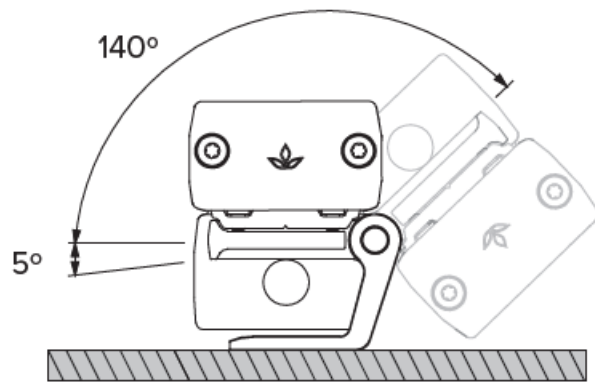

Find more product resources at lumascape.com ARCHITECTURAL & FACADE LIGHTING | Learn more. Visit lumascape.com

Documents / Resources

	<p>LUMASCAPE LINEALUX L3 LS9032 Foundation [pdf] Instruction Manual LINEALUX L3 LS9032 Foundation, LINEALUX L3, LINEALUX L3 Foundation, LS9032 Foundati on, LS9032, Foundation</p>
--	---