
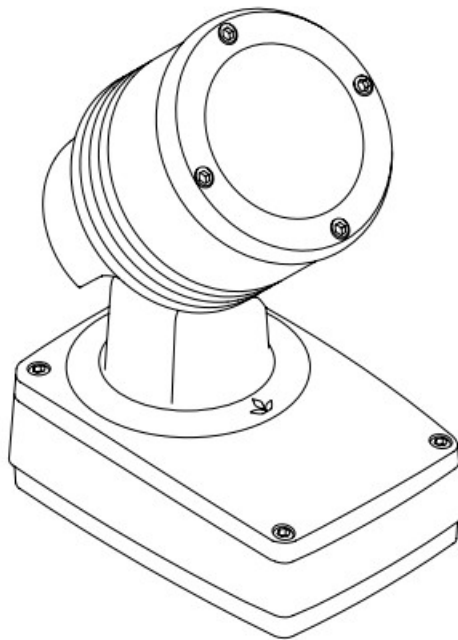
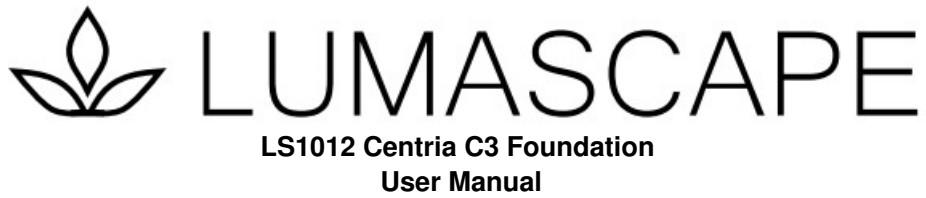




LUMASCAPE LS1012 Centria C3 Foundation User Manual

[Home](#) » [LUMASCAPE](#) » LUMASCAPE LS1012 Centria C3 Foundation User Manual 



Contents

[1 LS1012 Centria C3](#)

[Foundation](#)

[2 Tools Required](#)

[3 Included Components](#)

[4 Assembly Instructions](#)

[5 Wiring Designations](#)

[6 Dimensions](#)


[7 Documents / Resources](#)

[8 Related Posts](#)


LS1012 Centria C3 Foundation

MODEL	LS1012
PART NUMBER	LS1012 – 24D xxx xx 01 xx xx
INSTALLATION TYPE	WALL MOUNT
IP RATING	IP66/67 (Passes IP68 Test)
SUPPLY VOLTAGE	220-240 ~Vac, 50 Hz
INSTRUCTIONS COVER	Single Color (Non-Dimmable) Single Color Dimming (Dali)
DIMENSIONS (LxWxH)	10.0" x 4.7" x 7.0" (255 x 120 x 178 mm)
WEIGHT	4.5 lbs (2.0 kg)
MAX. PROJECTED AREA	1.1 ft ² (0.1 m ²)


Tools Required

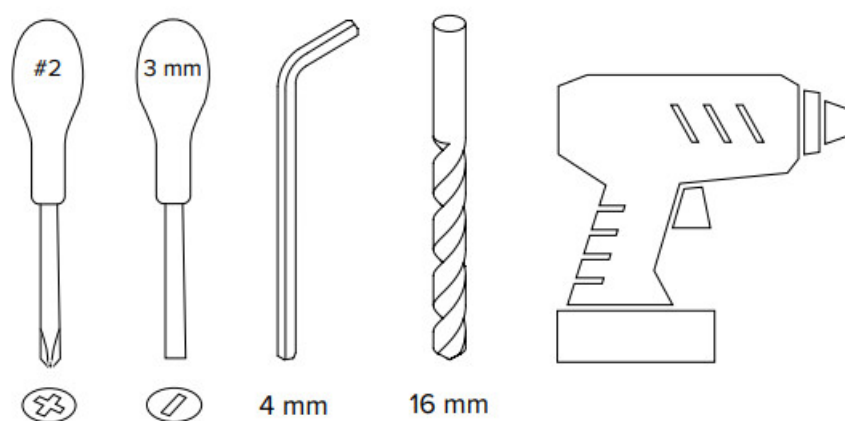


Included Components

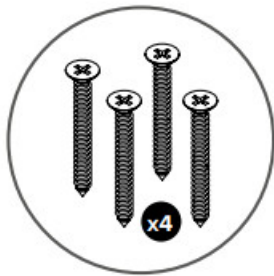


Mounting Screws

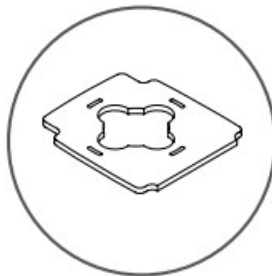

EPDM Gasket

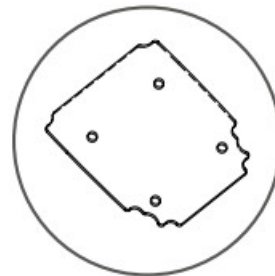

Drill Template



Instructions



Luminaire



4mm Allen Key



Do Not Use Power Tools on Screws



Keep Away from Flammable Materials



Do Not Use Silicone On Outside Surface



Keep Electronics Free From Dirt and Moisture




Do Not Hose or Pressure Clean



Do Not Cut Cable to the Luminaire

Assembly Instructions

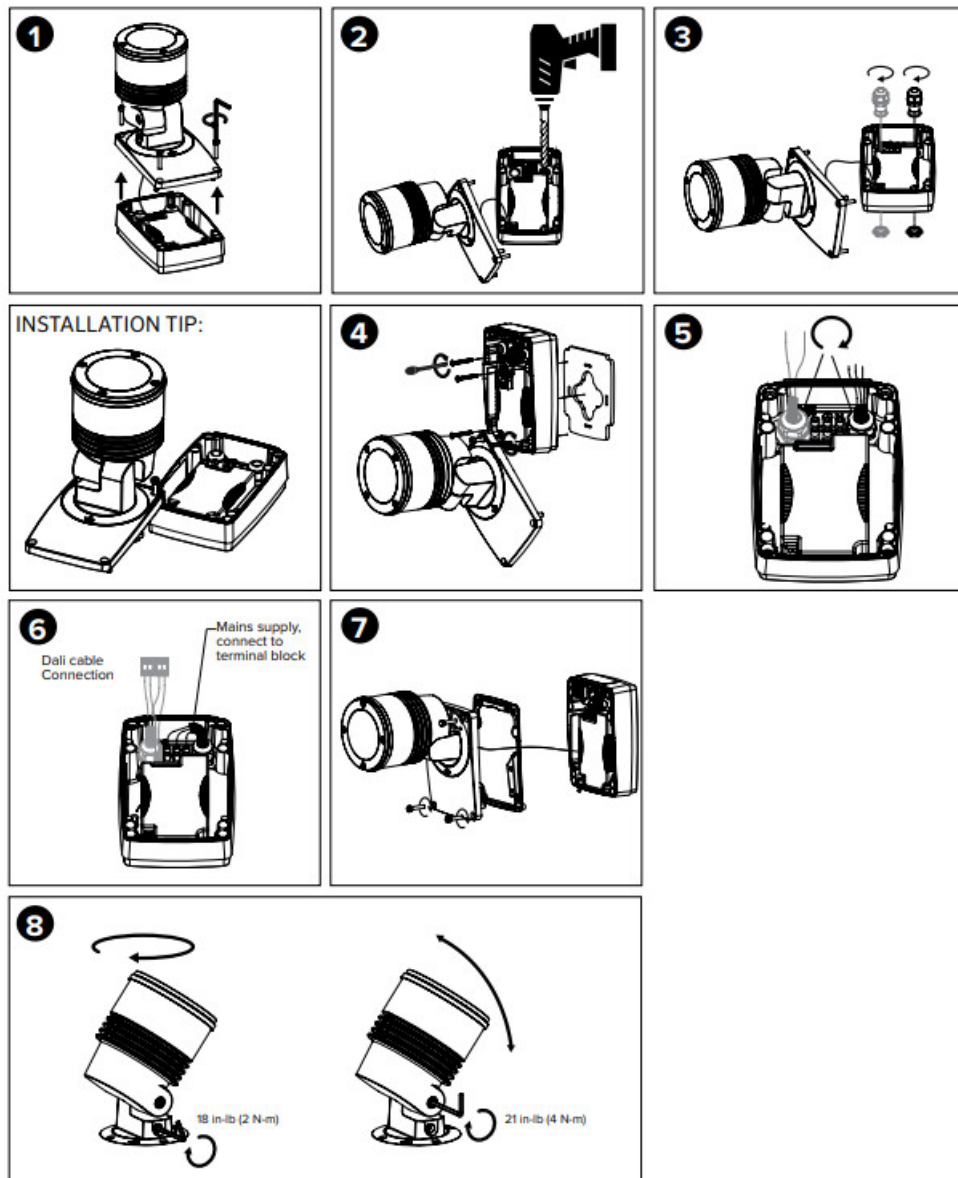


Wiring Designations

Non-Dimming (3-Core)

Designation	Color
Active	Brown
Neutral	Blue
Earth	Green / Yellow

Dimensions

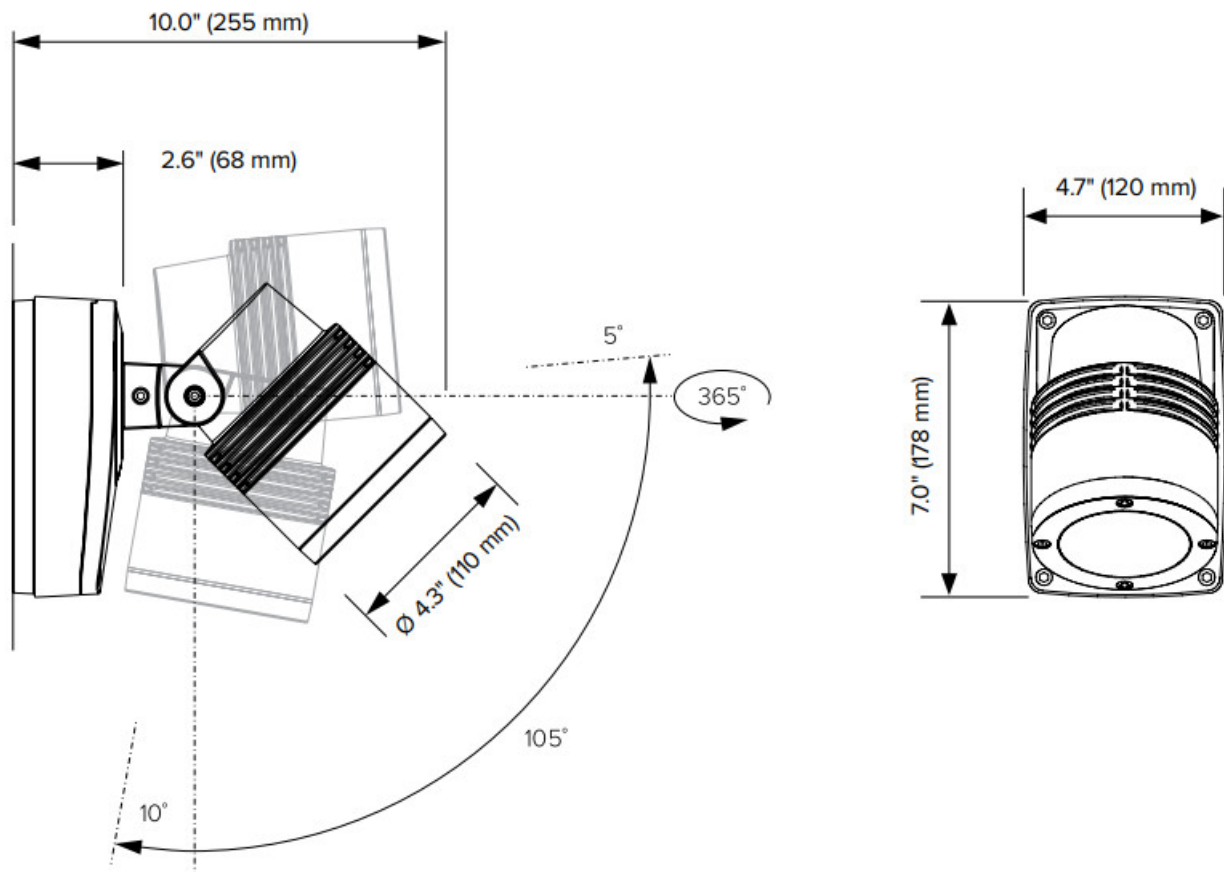

Please read and follow all safety instructions carefully. Failure to do so will void warranty.

WARNING – Product Warranty is void if product is not installed as per installation instructions and in compliance with all local and provincial codes.

- Ensure installation complies with local electrical rules and regulations.
- All electrical work must be performed by a licensed electrician.
- Protective earth; protective ground (symbol 7).
- All luminaires may become hot. Use discretion on where the luminaire is mounted. Take care when setting luminaire as it may become hot.
- Luminaire should only be used complete with protective shield. If protective shield is cracked, immediately stop using luminaire. Isolate light source, keep it dry and immediately contact Lumascope for replacement of protective shield (symbol 11).
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by Lumascope or their service agent in order to avoid a hazard.
- If the luminaire is mounted at heights of 9.8' (3 m) or greater it shall be fitted with additional restraints i.e., lanyards.
- The light source contained in this luminaire shall only be replaced by Lumascope or their service agent.
- Do not stare at the operating light source. The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 26' (8 m) is not expected (symbol 13)
- Basic insulation has been maintained between line voltage and the control conductors.
- To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.
- Ensure mains input power is surge protected.

- Never make or break connections while the circuit is energized.
- Do not make modifications or alter the product.
- Keep luminaire clean and free of debris.
- Only clean with warm water.
- Do not use chemicals or abrasives to clean luminaire as this may void the product warranty.
- Connections are to be kept clean and dry at all times.
- Suitable for use indoors or outdoors.
- For mounting on vertical or near vertical surfaces.



Documents / Resources



[LUMASCAPE LS1012 Centria C3 Foundation](#) [pdf] User Manual
LS1012 Centria C3 Foundation, LS1012, Centria C3 Foundation, C3 Foundation, Foundation