

LUMBERJACK TOOLS
CSK4000
Countersink Bit Set



LUMBERJACK TOOLS CSK4000 Countersink Bit Set Instruction Manual

[Home](#) » [LUMBERJACK TOOLS](#) » LUMBERJACK TOOLS CSK4000 Countersink Bit Set Instruction Manual 

Contents

- 1 LUMBERJACK TOOLS CSK4000 Countersink Bit Set
- 2 ABOUT YOUR PRODUCT
- 3 WHAT'S INCLUDED
- 4 SET UP
- 5 MAINTENANCE
- 6 TROUBLESHOOTING
- 7 UNEXPECTED OCCURRENCES
- 8 Documents / Resources
 - 8.1 References

LUMBERJACK TOOLS

LUMBERJACK TOOLS CSK4000 Countersink Bit Set



ABOUT YOUR PRODUCT

Thank you for purchasing our Countersink Bit Set! The Countersink Bit is designed to taper mortise holes 60° to match the shoulder profile cut by Commercial and Industrial Series Tenon Cutters. This results in a stronger joint and a more finished and professional look. The tool body is machined from a solid aluminum billet. The blade is laser cut, heat treated, and precision ground to provide years of service. The shank is machined from alloy steel to withstand the stresses of cutting.

Our lifetime guarantee covers the tool body and shank. The blade is covered for breakage for 90 days from the date of purchase under normal working conditions. Blades will dull faster when cutting hardwoods versus softwoods (peeled or unpeeled). Soil and other abrasive substances will reduce blade life and are not covered under this warranty. When making a claim, you must show proof of purchase from an authorized distributor. This guarantee is valid only to the original buyer, not for tools sold secondhand, used, or sold “as is” to a second party.

WHAT VOIDS WARRANTY

To keep our lifetime and 90-day warranty you must AVOID the following actions:

- Operating the tool in a lathe
- Operating the tool over 600 RPM
- Running the tool into a nail or foreign object
- Altering or misusing the tool










SAFETY

Before beginning any project, carefully read and follow ALL safety and operational instructions for any tools or devices you use. Failure to do so may cause physical harm to yourself or those around you. If you feel uncomfortable using our Countersink Bit or any other tool, STOP immediately. Lumberjack Tools assumes no responsibility for injury caused to the operator, bystander, or tools used in conjunction with using or misusing our Countersink Bit.

- NEVER OPERATE POWER TOOLS UNDER THE INFLUENCE OF DRUGS, ALCOHOL, OR ANY MEDICATIONS.


- ALWAYS WEAR SAFETY GLASSES, DUST MASK, AND ANY OTHER PERSONAL PROTECTION ITEMS AS NEEDED.
- NEVER WEAR LOOSE ITEMS THAT COULD BE CAUGHT IN MOVING
- PARTS. SECURE LOOSE OR LONG HAIR AWAY FROM THE AREA.
- WE STRONGLY RECOMMEND A SINGLE-SPEED, GEAR-DRIVEN DRILL WITH RPMS OF 500 OR LESS.
- EXCEEDING THESE RPMS MAY RESULT IN DAMAGE TO THE TOOL.
- ALWAYS DISCONNECT THE POWER AND ALLOW THE DRILL TO COME TO A
- COMPLETE STOP BEFORE INSTALLING, REMOVING, OR ADJUSTING THE TOOL.
- NEVER APPLY BENDING FORCE (SIDE LOADING) TO THE TOOL. SIDE
- LOADING COULD CAUSE THE SHANK TO FAIL OR MAY RESULT IN BLADE DAMAGE.
- ALWAYS SECURE THE LOG IN A VISE OR CLAMP BEFORE STARTING YOUR DRILL.
- FAILURE TO DO SO MAY RESULT IN INJURY. ALWAYS HANDLE THE BLADE WITH EXTREME CARE! FAILURE TO DO SO MAY RESULT IN SERIOUS INJURY.
- WHEN EXCESSIVE FORCE IS REQUIRED TO CUT, RE-SHARPEN, OR REPLACE THE BLADES. A SHARP TOOL IS A SAFE TOOL!

WHAT'S INCLUDED

 <p>Countersink (Qty. 1)</p>	 <p>TB3125 Blade (Qty. 1)</p>	 <p>1/4" x 1/2" Button Head Cap Screw (Qty. 2)</p>  <p>5/32" Allen Wrench (Qty. 1)</p>
 <p>Blade Shim (Qty. 2)</p>	 <p>5/16" x 1" Shoulder Screw (Qty. 1)</p>	
 <p>2" Bushing (Qty. 1)</p>	 <p>1-1/2" Bushing (Qty. 1)</p>	 <p>1" Bushing (Qty. 1)</p>


Note: Images are not to scale.

SET UP

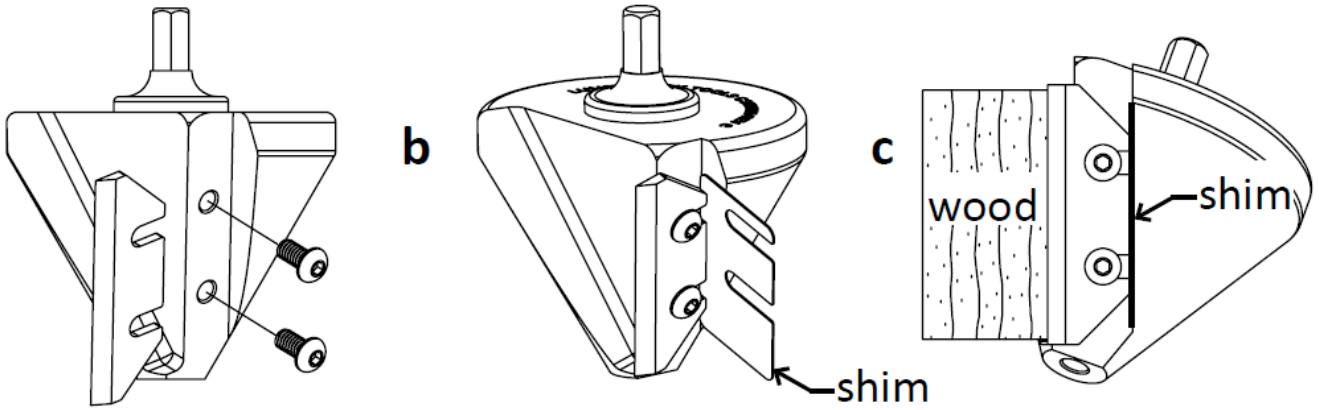


Install Blade

- a. Place the TB3125 Blade in the pocket and loosely attach with screws.
- b. Use one shim to space the blade against the countersink.
- c. Hold the blade in place with a piece of wood while securing screws.
- d. Remove shim.

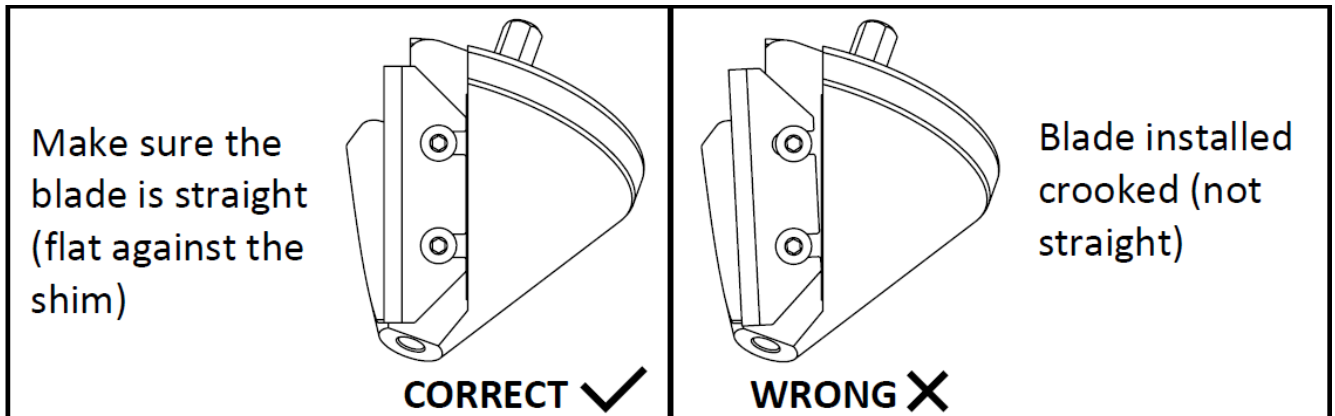

CAUTION! BLADE VERY SHARP!

Adjust Blade

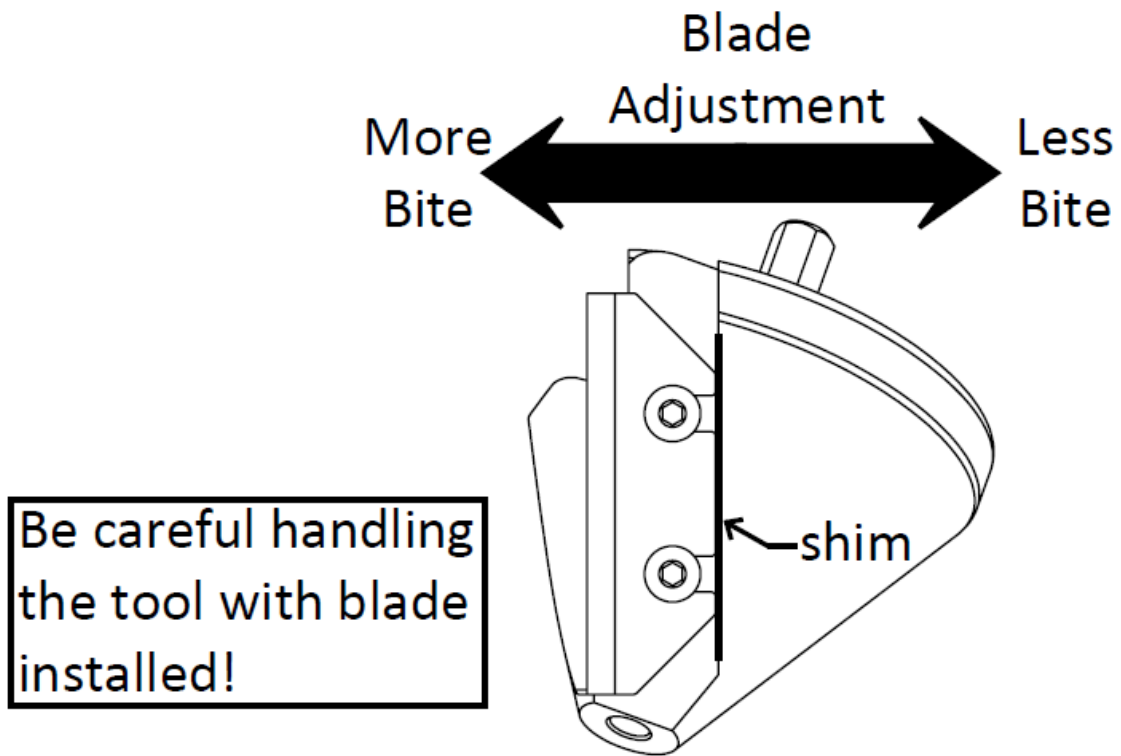


The graphic to the right displays what happens to cutting performance by adjusting the blade.

IMPORTANT


Correct blade offset is critical for smooth cutting.

- If cutting is too aggressive (too much bite), use life whips.
- If cutting is too shallow (not enough bite), add more shims.
- Folded paper works great as a shim for fine-tuning

Install Bushing

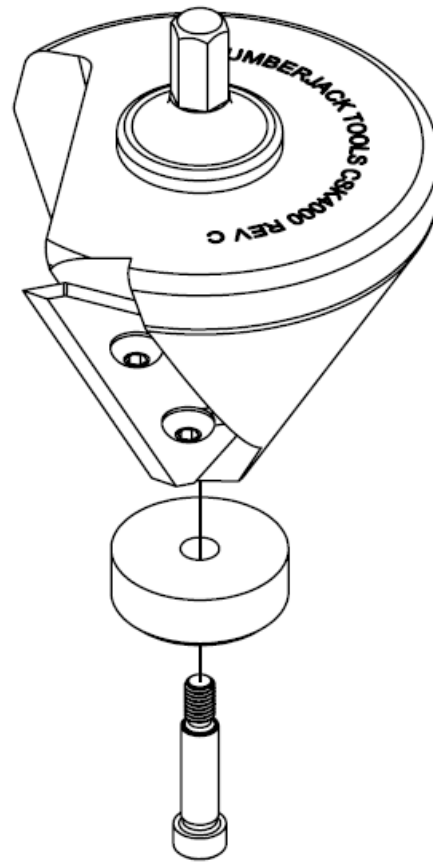


- Install the bushing on the bottom of the Countersink using the shoulder screw.

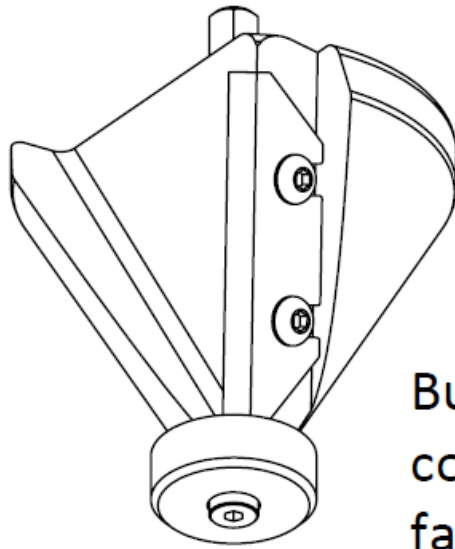

CORRECT ✓

Bushing installed
correctly (bevel
facing down)

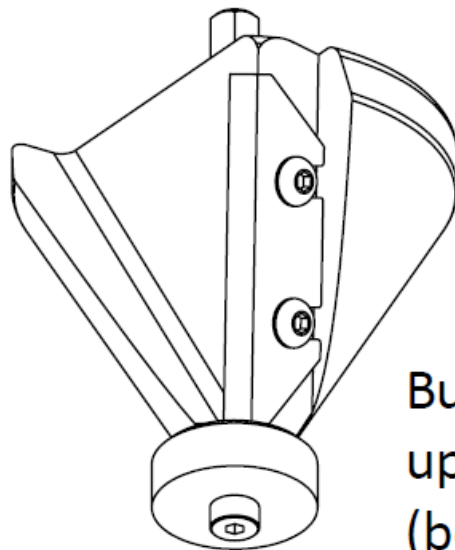


WRONG ✗

Bushing installed
upside down
(bevel facing up)

Tip

We recommend a low RPM, single-speed, corded drill. Install the correct bushing for the mortise hole (pg. 5) and attach the drill to the shank.


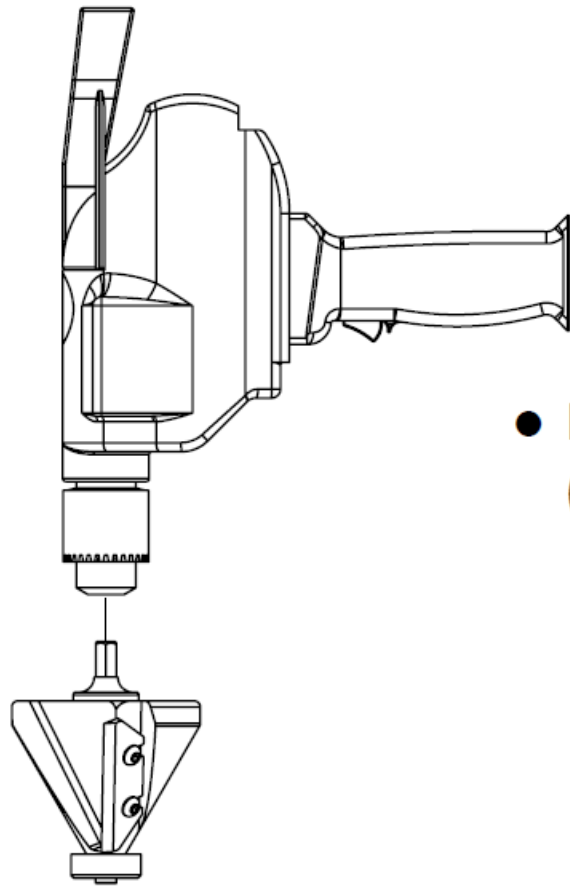



Tip

Use a drill press or Drill Sergeant to drill straight mortise holes.


IMPORTANT!

The Mortise hole must be straight before using the countersink. Irregular holes will cause the countersink bushing to bind and will prevent the countersink from cutting properly.

 <ul style="list-style-type: none"> ● Align Countersink Bit with mortise hole. 	<p>Chip build up expected with certain species of wood. Clear extremely carefully with screwdriver.</p> <p>Steady Pressure</p>  <ul style="list-style-type: none"> ● Drill into mortise hole until tool bottoms out or you reach desired depth.
--	--

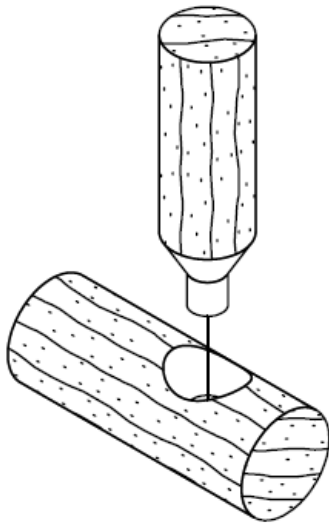

Test fit the tenon to see if the hole needs to be countersunk more.

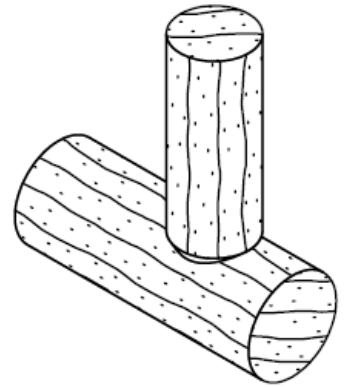

MAINTENANCE

Body

Cleaning

- Keep the Countersink body clear of sap and other build-up.
- Always remove the blade before cleaning.
- Clean the tool with a solvent (such as mineral spirits).

WARNING: ALWAYS HANDLE THE BLADE WITH EXTREME CARE!
FAILURE TO DO SO MAY RESULT IN SERIOUS INJURY.

Blade

- **Care**
 - Always wipe the blade with a thin film of oil at the end of the day to help prevent oxidation.
- **Cleaning**
 - Clean the blade with a solvent (such as mineral spirits) and immediately apply a thin film of oil to prevent oxidation.
 - Sharpening
 - Use a sharpening stone or file to re-sharpen the blade, then clean the blade and apply a thin film of oil.
- **Shank**
 - Replacement
 - If your shank breaks, we offer replacement shanks (see first page for contact information).
 - Turn the shank counter-clockwise to remove.
 - Turn the shank clockwise to install.

TASK EACH USE

- Clean blade pocket X
- Clean body X
- Clean blade X

- Inspect blade X
- Oil blade X

TROUBLESHOOTING

PROBLEM	CAUSE	SOLUTION
<ul style="list-style-type: none"> • Not countersinking mortise hole. 	<ul style="list-style-type: none"> • Blade not offset far enough from the tool body. 	<ul style="list-style-type: none"> • Use Blade Shim to offset the blade from the tool (Pg. 5).
	<ul style="list-style-type: none"> • Attempting to countersink crooked mortise hole. 	<ul style="list-style-type: none"> • The countersink only works on straight holes.
	<ul style="list-style-type: none"> • Using wrong wrong-sized bushing. 	<ul style="list-style-type: none"> • Measure the mortise hole and match it to the correct bushing.
<ul style="list-style-type: none"> • Takes too much of a “bite”. 	<ul style="list-style-type: none"> • Aggressive cutting from blade offset. 	<ul style="list-style-type: none"> • Adjust the blade using one or no Blade Shims (Pg. 5).
<ul style="list-style-type: none"> • Shoulder Screw is hard to remove. 	<ul style="list-style-type: none"> • Installed without applying anti-seize to threads. 	<ul style="list-style-type: none"> • Apply anti-seize to screw threads before installing.
<ul style="list-style-type: none"> • Drill stops while countersinking mortise hole. 	<ul style="list-style-type: none"> • Using a variable speed drill. 	<ul style="list-style-type: none"> • Make sure you are using a single-speed drill with low RPMs.
	<ul style="list-style-type: none"> • Blade bite is too aggressive. 	<ul style="list-style-type: none"> • Move the blade further back into the blade pocket (Pg. 5).
<ul style="list-style-type: none"> • Drill spins, but the countersink stops cutting deeper. 	<ul style="list-style-type: none"> • Countersink pocket full of chips. 	<ul style="list-style-type: none"> • Carefully remove chips from the countersink with a screwdriver.


UNEXPECTED OCCURRENCES

Engineers and Quality Control staff at Lumberjack Tools have provided you with one of the easiest-to-use and safest countersink tools on the market. However, there is always an unexpected chance of failure. Please contact our customer support for a replacement if a failure ever occurs to the tool body, shank, or blade.

Thank you again for purchasing our tools!

3210 Hogarth St., Eau Claire, WI, 54739 715.514-0319 www.lumberjacktools.com

Documents / Resources

 <p>The image shows the cover of the instruction manual for the Lumberjack Tools CSK4000 Countersink Bit Set. The cover features the Lumberjack Tools logo at the top, a technical drawing of the bit set in the center, and the text 'USER MANUAL', 'COUNTERSINK BIT SET', and '100° SHANK PROFILE'. It also includes the slogan 'Safe, Fast & Easy to Use' and a small map of the United States at the bottom.</p>	<p>LUMBERJACK TOOLS CSK4000 Countersink Bit Set [pdf] Instruction Manual CSK4000, CSK4000 Countersink Bit Set, Countersink Bit Set, Bit Set, Set</p>
---	--

References

- [Shop Lumberjack Tools - Your Log Furniture Building Headquarters](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.