Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

VEVOR SCC-16P

VEVOR 16 Device Charging Station (Model SCC-16P) User Manual

Comprehensive instructions for setup, operation, and maintenance.

1. Introduction

This manual provides detailed instructions for the safe and efficient use of your VEVOR 16 Device Charging Station, Model SCC-16P. This mobile charging cart is designed to securely store and charge up to 16 laptops, tablets, or Chromebooks with screen sizes up to 15.6 inches. Please read this manual thoroughly before assembly and operation to ensure proper functionality and safety.

2. Safety Instructions

- Ensure the charging station is placed on a stable, level surface.
- Do not overload the electrical outlets. Connect the charging station to a properly grounded power source.
- Keep the charging station away from water or damp environments.
- Do not block ventilation openings. Adequate airflow is essential for heat dissipation.
- Only use the provided keys for locking and unlocking the doors.
- Supervise children around the charging station.
- Unplug the unit from the power source before cleaning or performing any maintenance.
- Do not attempt to modify or repair the charging station yourself. Contact qualified personnel for service.

3. Product Overview

The VEVOR 16 Device Charging Station is constructed from durable metal and features a secure, ventilated design. It includes an integrated power strip and cable management system for organized charging.

3.1 Components Included

Verify that all components are present before assembly:

- Charging Cart Body

- 22 x Phillips Screws (M5 x 12 mm)
- 4 x Phillips Screws (M8 x 15 mm)
- 2 x Phillips Round Head Screws (M10 x 15 mm)
- 1 x Open-End Wrench (M16)
- 4 x Keys (2 for Front Door, 2 for Rear Door)
- 4 x Caster Wheels (2 with Brakes)
- 1 x 16-Slot US Standard Power Strip
- 2 x Power Strip Fixing Clips
- 1 x Phillips Screwdriver
- 16 x Adhesive Cable Clips
- 1 x User Manual (this document)



Image: Overview of the VEVOR 16 Device Charging Station and its included accessories, along with a detailed dimensions diagram.

3.2 Key Features

- **16 Device Slots:** Accommodates laptops and tablets up to 15.6 inches.
- **Secure Storage:** Lockable front and rear doors with included keys.
- **Integrated Charging:** Built-in 16-slot power strip with surge protection.
- **Efficient Cable Management:** Internal cable clips and cord wraps keep cables tidy.
- **Ventilated Design:** Perforated panels ensure proper heat dissipation.
- **Mobile Design:** Four robust caster wheels, two of which are lockable for stability.
- **Durable Construction:** Made from cold-rolled steel with a rust-resistant coating.

Multi-Layer Guard Design

Reliable charging for your devices

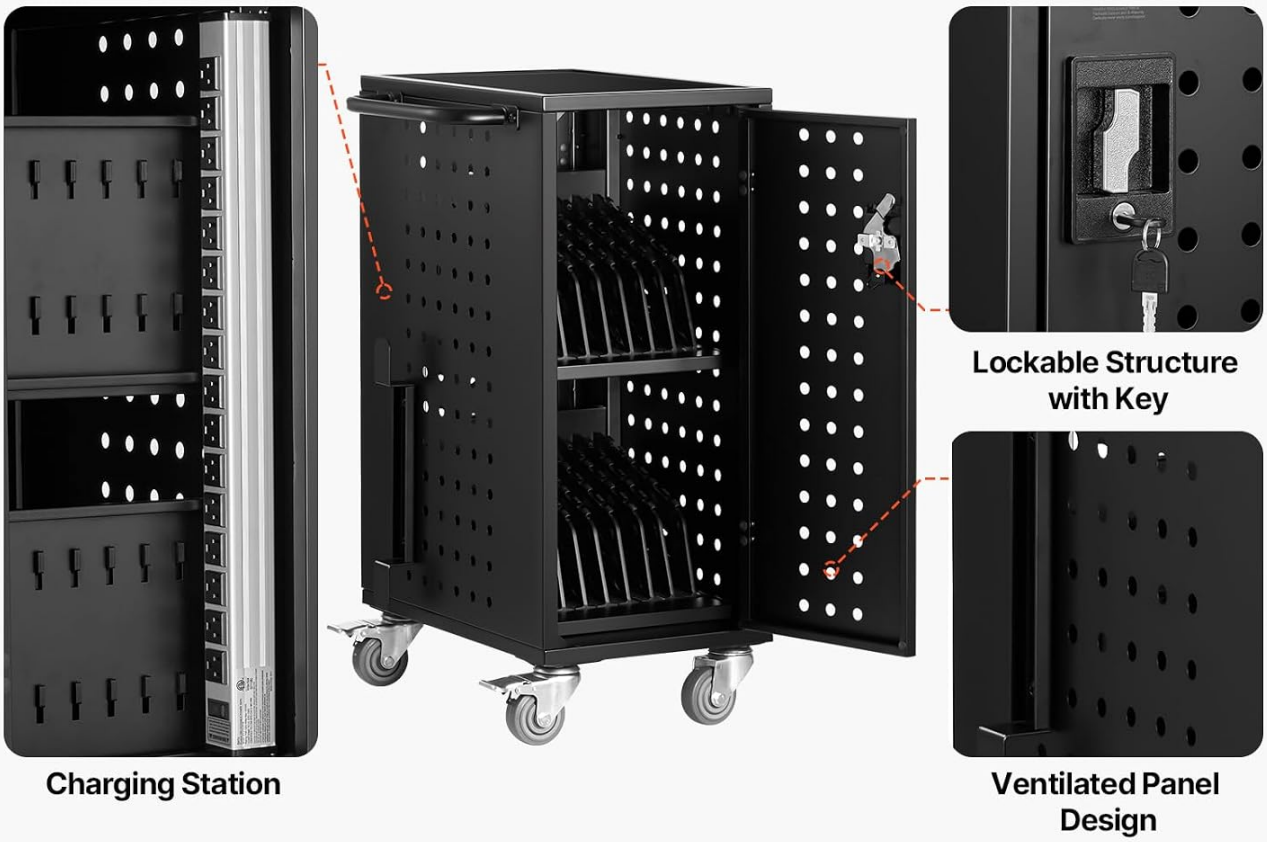

Image: Detailed view of the charging station's multi-layer guard design, highlighting the internal charging station, lockable door mechanism, and ventilated side panel.



Image: Illustration of the sturdy steel construction, emphasizing its dirt-proof, easy-to-clean, fast ventilation, and rust-resistant coating properties.

4. Setup Instructions

The VEVOR 16 Device Charging Station is designed for straightforward assembly. Follow these steps:

4.1 Unpacking

1. Carefully remove all components from the packaging.
2. Check the component list (Section 3.1) to ensure all parts are present and undamaged.
3. Retain packaging materials for future transport or storage, if desired.

4.2 Attaching Caster Wheels

1. Lay the charging cart body on its side on a soft, protective surface to prevent scratches.
2. Insert the stems of the four caster wheels into the designated holes on the bottom of the cart.
3. Use the provided open-end wrench (M16) to tighten the nuts on the caster wheels securely. Ensure the two lockable wheels are positioned at the front for easy access.
4. Carefully return the cart to an upright position.

4.3 Installing Power Strip and Cable Management

1. Open the rear door of the charging station using one of the provided keys.
2. Position the 16-slot US Standard Power Strip inside the rear compartment.
3. Use the two Power Strip Fixing Clips and appropriate screws (M5 x 12 mm) to secure the power strip to the internal mounting points. Use the Phillips screwdriver for this step.
4. Route the power strip's main cable through the designated power cable port at the back of the cart.
5. Inside each device slot, use the 16 Adhesive Cable Clips to organize the charging cables for each device. This helps prevent tangles and keeps the charging area neat.

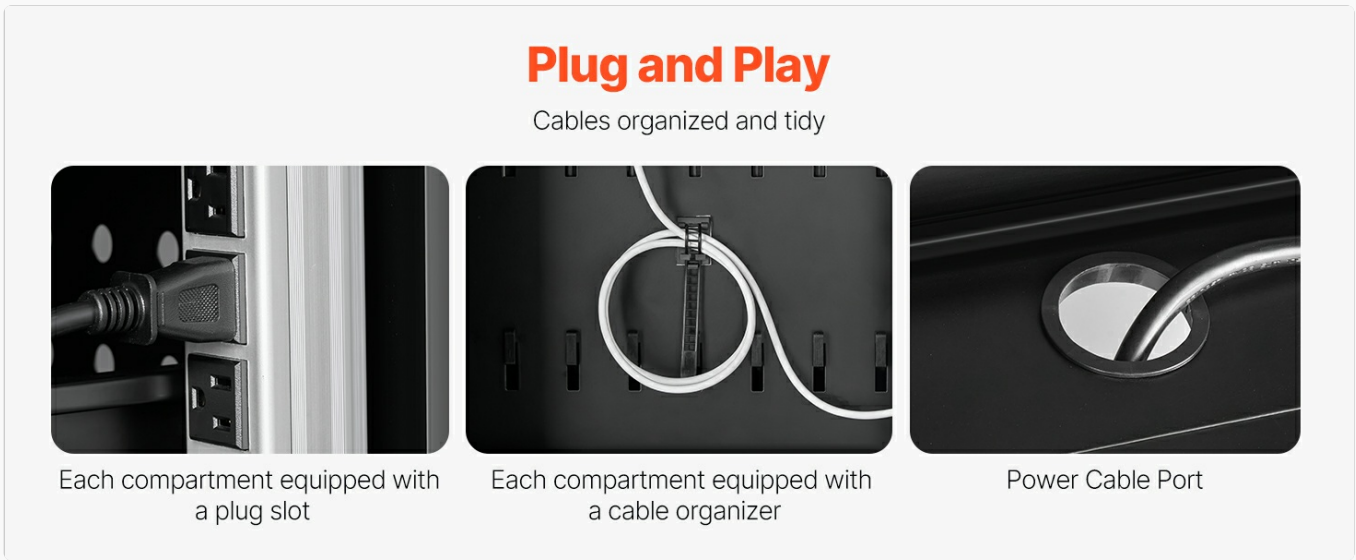

Image: Close-up view of the internal cable management system, illustrating the plug slots, cable organizers, and the main power cable port for a tidy setup.

5. Operating Instructions

5.1 Charging Devices

1. Open the front door of the charging station using a key.
2. Place each device (laptop, tablet, Chromebook) into an individual slot. Ensure devices fit comfortably without forcing them. The maximum supported device size is 15.6 inches.
3. Connect each device's power adapter to the corresponding outlet on the internal power strip. Route the cables through the cable clips to maintain organization.
4. Close and lock the front door.
5. Connect the main power cable of the charging station to a grounded wall outlet. The devices will begin charging.



Image: A hand inserting a device into one of the 16 slots, demonstrating the ample and secure space available, along with detailed slot dimensions.

5.2 Moving the Charging Cart

1. Ensure all devices are securely placed within their slots and the doors are locked before moving.
2. Unplug the main power cable from the wall outlet.
3. Unlock the two front caster wheels by flipping their locking levers.
4. Use the integrated handle to push or pull the cart to its desired location.
5. Once in position, engage the locking levers on the two front caster wheels to secure the cart.



Image: A person demonstrating the ease of mobility of the charging cart, highlighting the ergonomic handle and the lockable caster wheels for secure positioning.

6. Maintenance

Regular maintenance ensures the longevity and safe operation of your charging station.

- **Cleaning:** Disconnect the cart from power. Use a soft, dry cloth to wipe down the exterior. For stubborn marks, a slightly damp cloth with mild detergent can be used, followed by drying. Do not use abrasive cleaners or solvents.
- **Cable Inspection:** Periodically inspect all power cables and adapters for signs of wear, fraying, or damage. Replace any damaged cables immediately.
- **Ventilation:** Ensure the ventilation holes are free from dust and obstructions to maintain proper airflow.
- **Lock Mechanism:** Keep the lock mechanisms clean and lubricated if necessary to ensure smooth operation.

7. Troubleshooting

If you encounter issues with your VEVOR 16 Device Charging Station, refer to the following common problems and

solutions:

Problem	Possible Cause	Solution
Devices are not charging.	Main power cable unplugged. Power strip switch is off. Device power adapters not properly connected. Circuit breaker tripped (on power strip or wall outlet).	Ensure the main power cable is securely plugged into a live wall outlet. Check if the power strip's master switch is in the "ON" position. Verify each device's power adapter is firmly connected to both the device and the power strip outlet. Reset the circuit breaker on the power strip or the building's electrical panel.
Cart is difficult to move.	Caster wheels are locked. Obstruction in wheels.	Ensure both lockable caster wheels are in the unlocked position. Check wheels for debris (hair, lint, etc.) and remove if present.
Doors do not lock or unlock smoothly.	Key is bent or damaged. Lock mechanism is dirty or stiff.	Use a spare key. If all keys are damaged, contact VEVOR support. Apply a small amount of graphite lubricant to the lock mechanism.

8. Specifications

Detailed technical specifications for the VEVOR 16 Device Charging Station (Model SCC-16P):

Model Number	SCC-16P
Device Capacity	16 devices
Max Device Screen Size	15.6 inches
Product Dimensions (D x W x H)	12.83" x 20.08" x 27.64" (326 x 510 x 702 mm)
Product Weight	52.75 lbs (23.92 kg)
Material	Cold-Rolled Steel
Color	Black
Caster Type	Rigid, with 2 lockable wheels
Power Strip	16-slot US Standard, with surge protection
Required Assembly	Minimal (wheels, power strip)

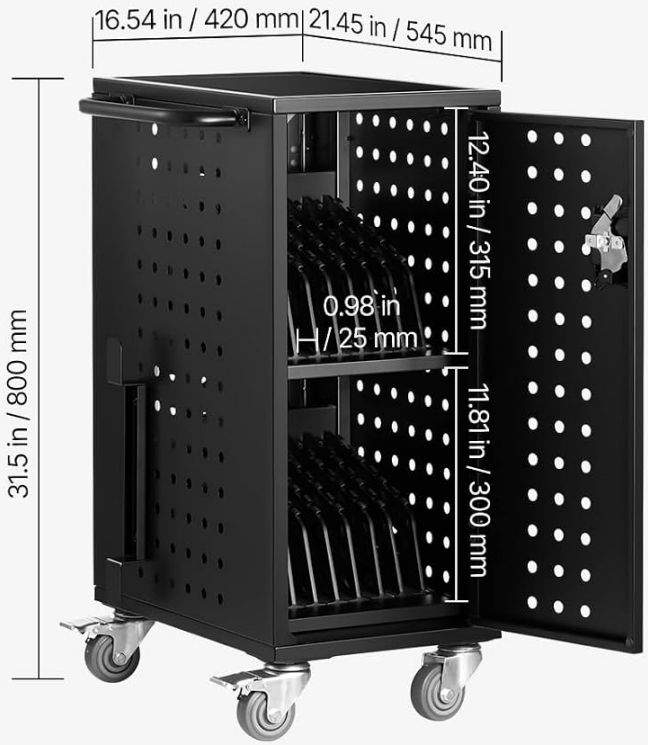

Item Model Number: SCC-16P	Thickness: 0.98 in / 25 mm
Charging Slots: 16 Slots	Depth: 13 in / 330 mm
Max Device Size: 15.6 in / 396.24 mm	Upper Layer Height: 12.40 in / 315 mm
Product Weight: 52.75 lbs / 23.92 kg	Lower Layer Height: 11.81 in / 300 mm
Product Size: 21.45 × 16.54 × 31.50 in / 545 × 420 × 800 mm	

Image: Technical diagram showing the precise dimensions of the VEVOR 16 Device Charging Station, including height, width, depth, and internal slot measurements.

9. Warranty and Support

VEVOR products are designed for durability and performance. For warranty information, technical support, or to purchase replacement parts, please visit the official VEVOR website or contact their customer service directly.

VEVOR Official Website: www.vevor.com
Please have your model number (SCC-16P) and purchase details ready when contacting support.

© 2023 VEVOR. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0GCHLW6S2

More documents and user manuals: **https://manuals.plus/**