



LUXRITE LR32094 5 11W LED Architectural Multiple Downlight Selectable Instruction Manual

[Home](#) » [LUXRITE](#) » LUXRITE LR32094 5 11W LED Architectural Multiple Downlight Selectable Instruction Manual 

Contents

- [1 LUXRITE LR32094 5 11W LED Architectural Multiple Downlight Selectable](#)
- [2 Product Information](#)
- [3 Product Usage Instructions:](#)
- [4 PARTS](#)
- [5 FIXTURE INSTALLATION](#)
- [6 LIMITED WARRANTY](#)
- [7 Documents / Resources](#)

LUXRITE

LUXRITE LR32094 5 11W LED Architectural Multiple Downlight Selectable




Product Information

- Product Name: Recessed 5 Head Multilight Downlight – 5 CCT Selectable LR32094
- Model Number: LR32094
- Parts Included: Junction Box, Light Fixture, Spring Clips, Connector
- Cutout Size: 5.47 x 1.41 inches
- Manufacturer's Warranty: Three (3) years against manufacturing defects
- Contact Information: Phone – 732-882-1500, Website – luxrite.com

Product Usage Instructions:

1. Before installation or maintenance, turn off the power from the electrical panel.
2. Identify the parts included: Junction Box, Light Fixture, Spring Clips, and Connector.
3. Use the provided cutout size (5.47 x 1.41 inches) to create an appropriate hole in the ceiling or surface for installation.
4. Refer to FIG. 1 for visual guidance on the cutout size.
5. Mount the MOUNTING FRAME securely in the cutout hole.
6. Refer to FIG. 2, FIG. 3, and FIG. 4 for additional installation details.
7. Contact the manufacturer at the provided phone number or visit their website for any warranty-related queries or to obtain a copy of the original proof of purchase.
8. The manufacturer's warranty covers manufacturing defects for a period of three (3) years from the original date of purchase. The manufacturer will repair or replace the component as necessary.
9. Please note that the warranty does not cover the cost of connection, installation of replacement parts, or transportation.

PARTS

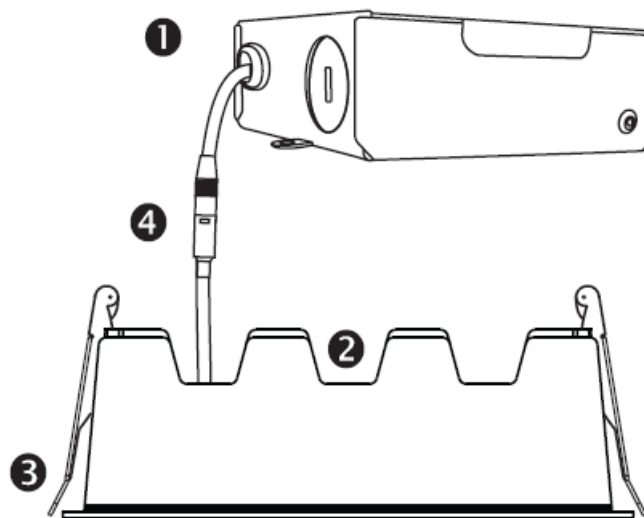



1. JUNCTION BOX
2. LIGHT FIXTURE
3. SPRING CLIPS
4. CONNECTOR

WARNING



TURN THE POWER OFF FROM THE ELECTRICAL PANEL BEFORE INSTALLATION OR MAINTENANCE

FIXTURE INSTALLATION

1. Turn power OFF from the electrical panel prior to installation.
2. Determine the location for installation and cut ceiling hole in accordance with cut-hole dimensions. Refer to Fig. 1 for appropriate size. (FIG. 1)
3. Open the junction box cover and remove the appropriate knockout(s) on the side panel. (FIG. 2)

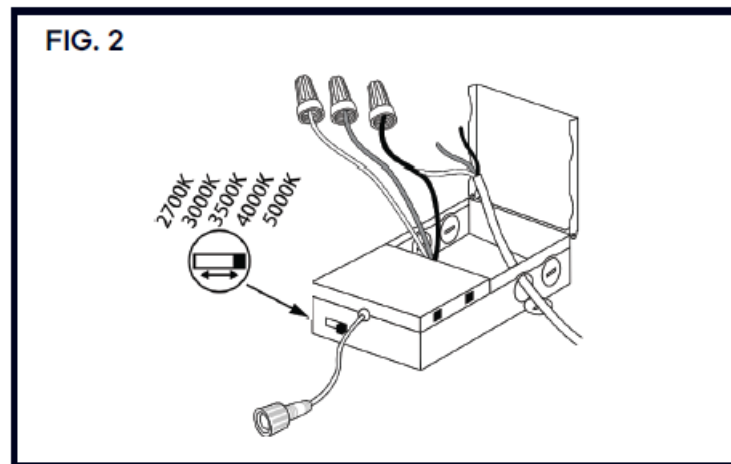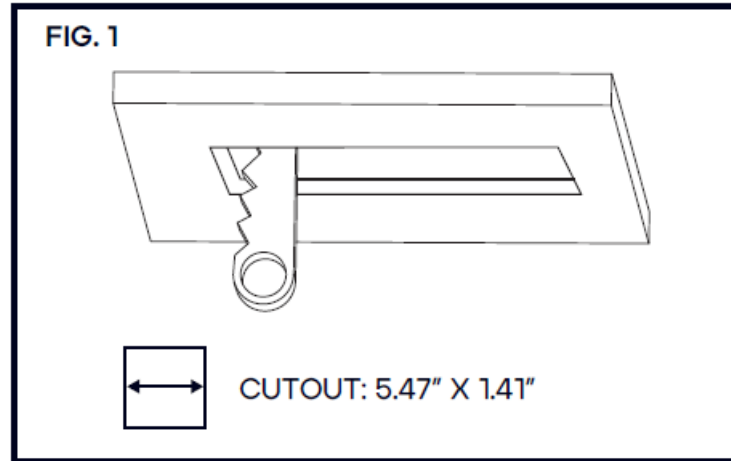

4. Insert the electrical supply cable through the knockout and secure with a cable connector (sold separately).
5. Using quick-connect push-in terminals, connect the ground wire to the green wire terminal; black wire to black wire terminal; white wire to white wire terminal. (FIG. 2)
6. Place all wiring and connections back in to the box and close the cover. Using the CCT SWITCH on the side, select desired color temperature. Connect the driver to the light panel.
7. Insert junction box through the mounting hole. (FIG. 3)
8. Push spring-loaded clips on the fixture upwards and insert fixture base in to the mounting hole. Release the clips and fixture will be pulled flush to the ceiling. (FIG. 4)

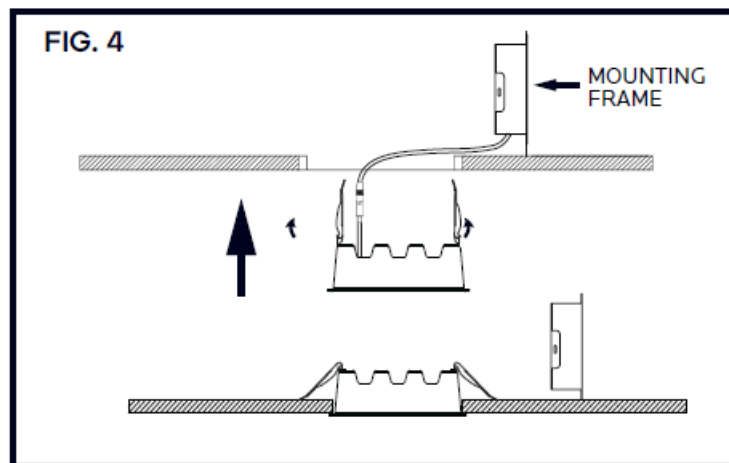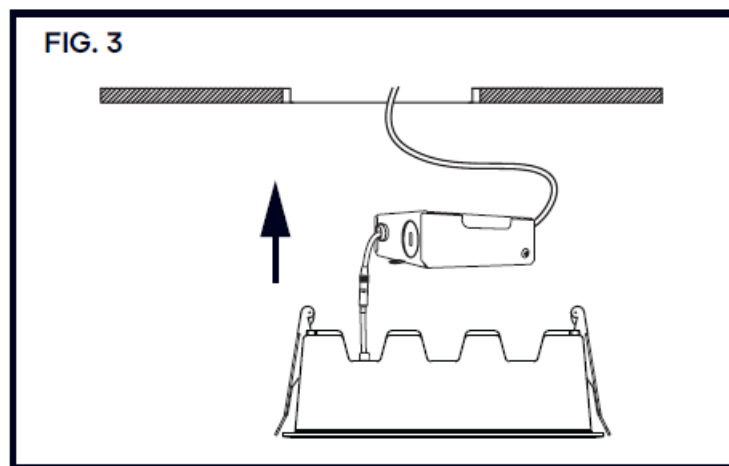

DO NOT MODIFY THIS FIXTURE. ANY MODIFICATIONS MAY RENDER THE PRODUCT UNSAFE AND VOID THE WARRANTY.

THIS PRODUCT IS SUITABLE FOR WET LOCATIONS

LIMITED WARRANTY

The warranty applies to the product from the original date of purchase for three (3) years against manufacturing defects. The owner must provide a copy of the original proof of purchase. The manufacturer's obligation under this warranty is limited to repairing or replacing the component. It is not related in any way to the cost of the connection, the installation of the replacement parts or the cost of transport.

732-882-1500 luxrite.com

Documents / Resources



[LUXRITE LR32094 5 11W LED Architectural Multiple Downlight Selectable](#) [pdf] Instruction Manual
 LR32094 5 11W LED Architectural Multiple Downlight Selectable, LR32094, 5 11W LED Architectural Multiple Downlight Selectable, Multiple Downlight Selectable, Downlight Selectable, Selectable