Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Daytech CR02-TY-CT02WR-WB06 CAH

DAYTECH WiFi Caregiver Call Button System User Manual

Model: CR02-TY-CT02WR-WB06 CAH

1. Introduction

The DAYTECH WiFi Caregiver Call Button System is designed to provide reliable and instant alerts for caregivers, ensuring timely assistance for individuals in need. This system utilizes 2.4GHz Wi-Fi connectivity to send alerts directly to a mobile application, offering extended range compared to traditional call buttons. It includes a receiver, a call button, and a wristband transmitter, providing flexibility for various home care scenarios.



Image: The DAYTECH WiFi Caregiver Call Button System in use, showing a wrist-worn button, a wall-mounted button, and the receiver, with app notifications on a smartphone.

2. What's in the Box

Your DAYTECH WiFi Caregiver Call Button System package includes the following components:

- 1 x WiFi Receiver
- 1 x Call Button (Pendant style)
- 1 x Wristband Transmitter
- User Manual (this document)
- AAA batteries (for transmitters, pre-installed or included)

3. Safety Information

- **Power Source:** Ensure the receiver is plugged into a standard electrical outlet. Do not overload electrical

circuits.

- **Battery Safety:** Replace batteries in transmitters as needed. Use only recommended battery types (1 AAA battery for each transmitter). Dispose of used batteries responsibly.
- **Water Resistance:** The call buttons are IP55 waterproof, suitable for use in bathrooms or during showering. However, avoid prolonged submersion in water.
- **Placement:** Place the receiver in a central location within your home to maximize signal range. Ensure it is within range of your 2.4GHz Wi-Fi network.
- **Choking Hazard:** Keep small parts, such as batteries, away from children.
- **Medical Devices:** Consult with a medical professional if you have concerns about interference with medical devices.

4. Product Features

- **WiFi Smart Connectivity:** Connects to a mobile app via 2.4GHz Wi-Fi for instant alerts to your phone, regardless of distance. (Note: Supports 2.4G Wi-Fi only, not 5G).
- **Dual Alert System:** Pressing a call button activates a loud alarm with flashing lights on the receiver and sends an instant notification to your phone app.
- **Family Sharing:** The app allows sharing of alert notifications with multiple family members or caregivers.
- **Customizable Alerts:** Choose from 20 ringtones and 5 volume levels on the receiver. Customize button names and melodies within the app to identify who needs help.
- **Flexible Wear Options:** Call buttons can be worn on the wrist (with wristband), as a pendant, or fixed to a wall.
- **IP55 Waterproof:** Call buttons are resistant to water splashes, making them suitable for use in bathrooms or during showering.
- **Extended Wireless Range:** Offers a wireless range of up to 328 feet (100 meters) between the call buttons and the receiver.



Image: The system's remote alert capability, showing alerts being sent to smartphones regardless of the caregiver's location, enabled by WiFi connectivity.



Image: Close-up of the comfortable and adjustable wristband, emphasizing its breathable and durable nylon material.



Image: Versatile placement options for the call button, including wall-mounted, wrist-worn, and necklace-style, highlighting its IP55 waterproof rating.



Image: Visual representation of the 328ft/100m wireless range, demonstrating how alerts are received via the app even when away from home.

5. Setup

5.1. Connecting the Receiver to the App

Follow these steps to connect your DAYTECH WiFi Receiver to the mobile application:

1. **Step 1:** Ensure your smartphone is connected to a 2.4GHz WiFi network and Bluetooth is enabled.
2. **Step 2:** Plug in the receiver. Long press the "forward button" on the receiver for 5 seconds to enter the distribution network pairing mode.
3. **Step 3:** Open the DAYTECH app (or Tuya/Smart Life app), tap "+" in the upper right corner, then tap "Add Device".
4. **Step 4:** Tap the receiver icon when it appears in the app.
5. **Step 5:** Enter your 2.4GHz WiFi network name and password, then tap "Next".
6. **Step 6:** Wait for a successful connection. The app will confirm once the receiver is connected.

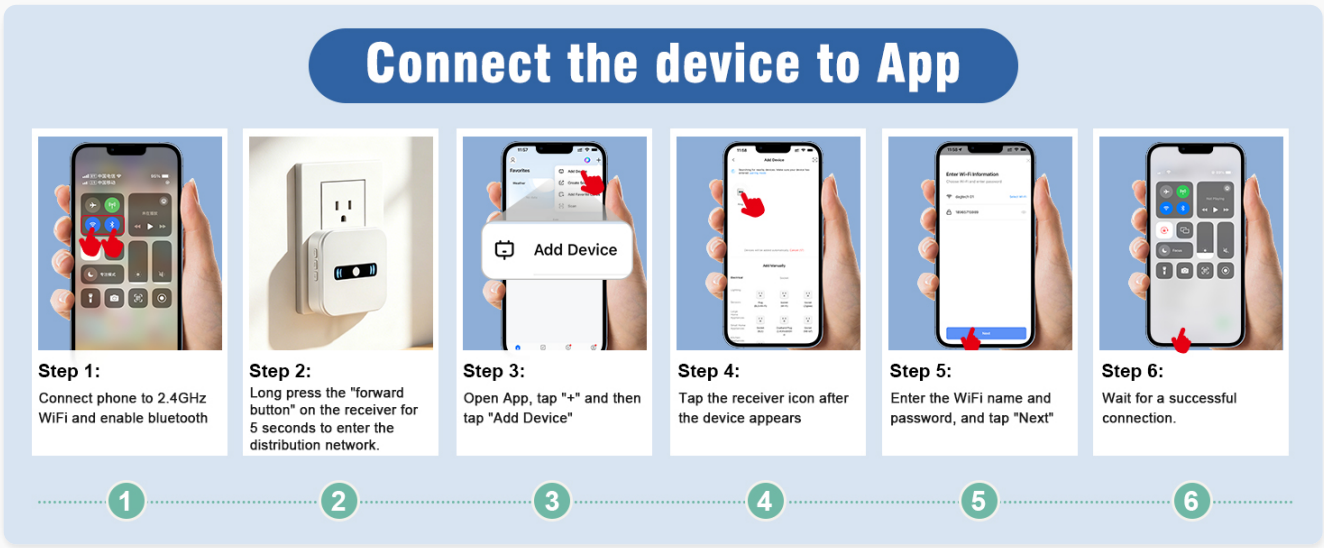


Image: Step-by-step instructions for connecting the receiver to the mobile application.



Image: Overview of app control and easy setup, highlighting 2.4GHz WiFi support and customizable settings.

5.2. Connecting Call Buttons to the App

Once the receiver is connected, you can pair the call buttons:

1. **Step 1:** On the Receiver page within the app, tap the "+" at the bottom.
2. **Step 2:** After the receiver emits a "beep" sound, press the call button you wish to pair to send a signal. Wait for a successful connection confirmation in the app.

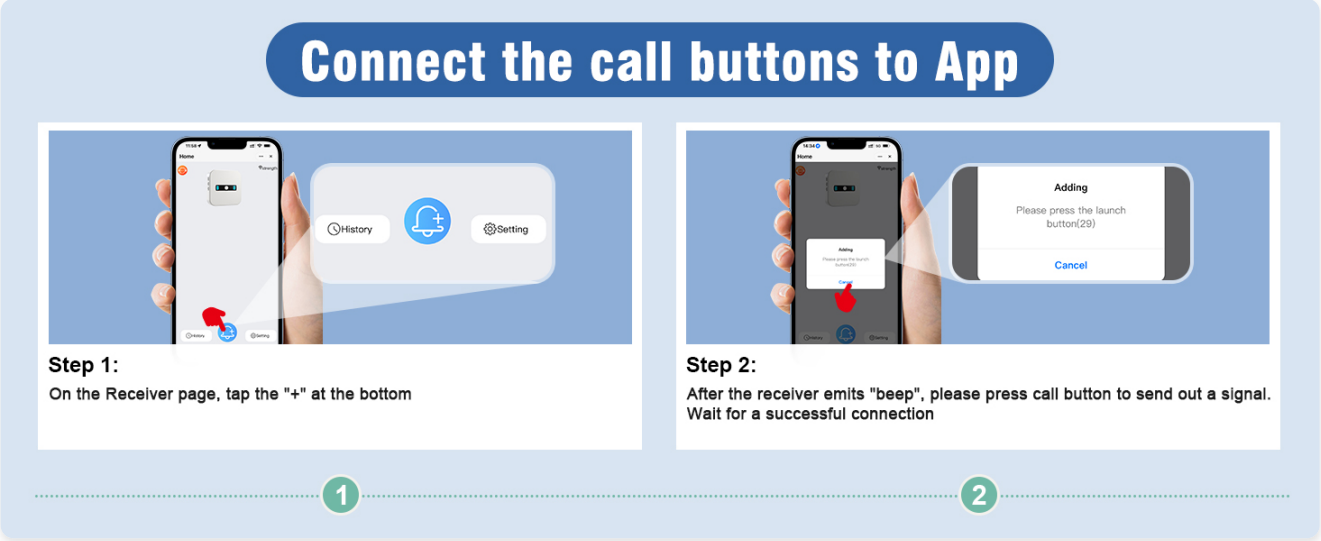


Image: Instructions for pairing call buttons with the mobile application.

6. Operating Instructions

6.1. Using the Call Button

To request assistance, simply press the call button. The receiver will sound an alarm and flash its lights, and an alert will be sent to the connected mobile app.



Image: Scenario demonstrating the system's function: a fall triggers an alarm, leading to immediate assistance.

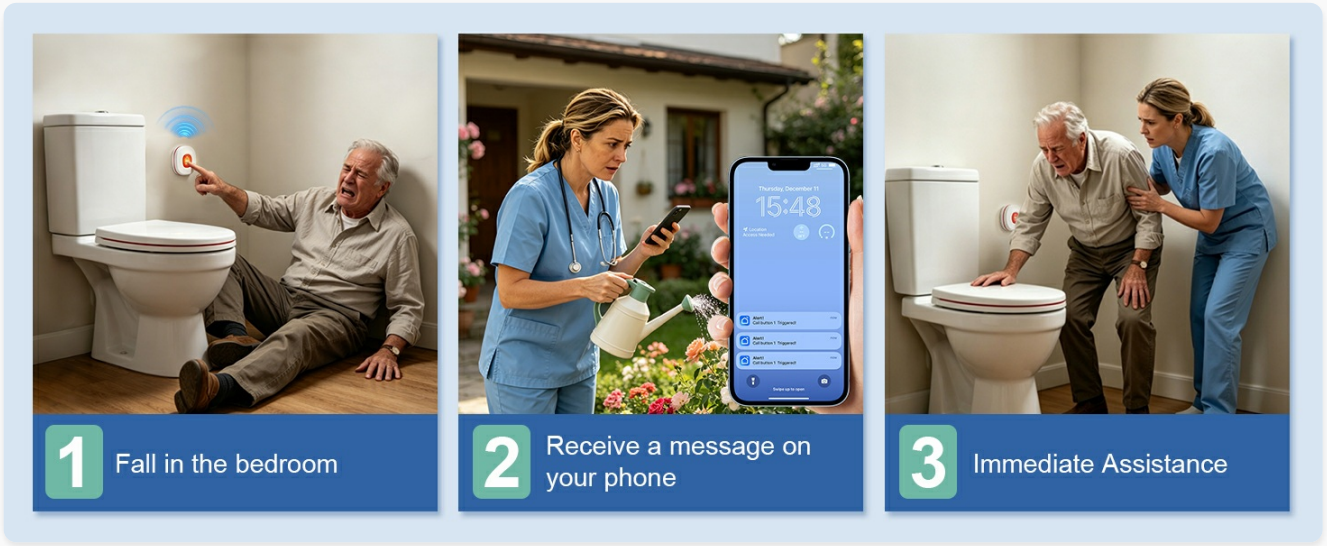


Image: Scenario demonstrating the system's function in a bathroom setting: a call for help triggers a phone message, leading to immediate assistance.

6.2. App Functions and Customization

The mobile app provides extensive control and customization options:

- **Ringtone & Volume:** In the app, you can set different ringtones and adjust the volume for each emergency button. The receiver has 20 ring tones and 5 volume levels.
- **Custom Button Names:** Assign custom names to each call button (e.g., "Bedroom Button," "Bathroom Wristband") to quickly identify the source of an alert.
- **Alert Duration:** Adjust the ring duration and delay time for alerts within the app settings.
- **Sharing Function:** Share device access and notifications with other caregivers or family members.


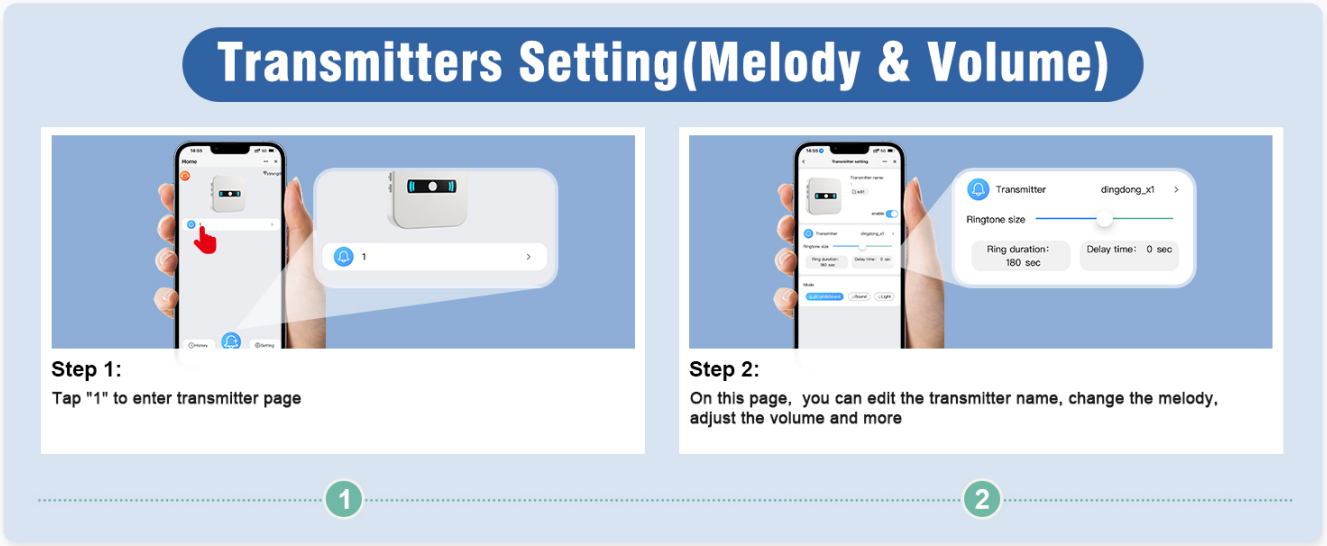


Image: Customizing ringtone, volume, and other settings for transmitters via the app.


How to share the device with more caregivers



Step 1:
Tap the "..." in the upper right corner.

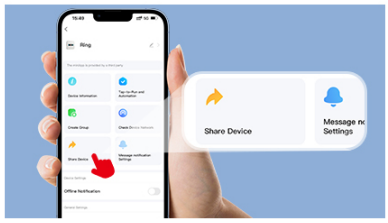

Step 2:
Tap "Share Device"

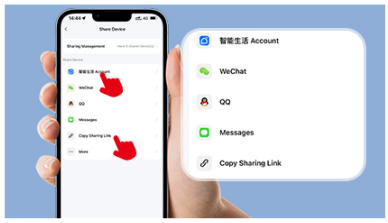

Step 3:
2 ways to share:
1. By adding a Tuya or Smart Life account.
2.By sharing a link

1 2 3

Image: Steps to share the device with multiple caregivers through the app, either by adding an account or sharing a link.

About Subscription

	Standard Version (Free)	Subscription Version	
Receiver Ring Alert	✓	✓	✓
Receiver LED Flashing Alert	✓	✓	✓
Notifications from APP	✓	✓	✓
SMS notification	✗	✓	✓
Phone call	✗	✓	✓
Subscription Fee	✗	$3.99-$49.99, depending on the number of notifications and billing cycle	

Image: Comparison table outlining features available in the free standard version versus the subscription version, including SMS and phone call notifications.

Subscription Options: While app alerts are free, optional subscription services are available for phone call and SMS notifications. Refer to the app for details on pricing and billing cycles.

7. Maintenance

- **Cleaning:** Wipe the receiver and call buttons with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- **Battery Replacement:** When the call button's indicator light dims or it fails to transmit signals reliably, replace the AAA battery. To replace, carefully open the back cover of the button, insert a new AAA battery with correct polarity, and close the cover securely.
- **Storage:** If storing the system for an extended period, remove batteries from the call buttons. Store in a cool, dry place.

8. Troubleshooting

- **No App Alerts:**
  - Ensure the receiver is connected to a 2.4GHz Wi-Fi network (not 5G).
  - Check if the receiver is properly paired with the app.
  - Verify your phone has an active internet connection and app notifications are enabled.
  - Confirm the call button is paired with the receiver.
- **Receiver Not Alarming:**
  - Ensure the receiver is plugged in and powered on.
  - Check if the call button's battery needs replacement.
  - Verify the call button is within the wireless range of the receiver.
  - Adjust the receiver's volume settings.
- **Call Button Not Working:**
  - Replace the AAA battery in the call button.
  - Re-pair the call button with the receiver via the app.
- **Short Wireless Range:**
  - Relocate the receiver to a more central position, away from large metal objects or other electronic devices that may cause interference.
  - Ensure there are no thick walls or floors heavily obstructing the signal path.

9. Specifications

Model Number	CR02-TY-CT02WR-WB06 CAH
ASIN	B0GHPZMKPZ
Brand	Daytech
Product Dimensions	5 x 2.3 x 7.9 cm; 230 g
Power Source (Transmitters)	1 AAA battery required (included)

Wireless Connectivity	2.4GHz WiFi Only
Control Method	App
Audible Noise (Receiver)	Up to 110 dB
Waterproof Rating (Buttons)	IP55



Image: Rear view of the call button and wristband transmitter, displaying model and regulatory information.

10. Warranty and Support

The DAYTECH WiFi Caregiver Call Button System comes with a**1-year manufacturer's warranty** from the date of purchase, covering defects in materials and workmanship.

For any questions, technical assistance, or troubleshooting, DAYTECH offers**lifetime customer service**. A comprehensive user guide and step-by-step video tutorials are available to assist you. If you encounter any issues connecting to the app or operating the device, please do not hesitate to reach out to Daytech customer support.

You can typically find contact information for customer support on the product packaging, the official Daytech website, or through your purchase platform.

© 2026 Daytech. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0GHPZMKPZ

More documents and user manuals: **https://manuals.plus/**