



Countertop Water Filter


Clean Water Machine

Replacement Filter Instructions


For use with AQ-CWM2-B




1. Twist filter chamber cap to the left and remove old filter from cap. Discard old filter.

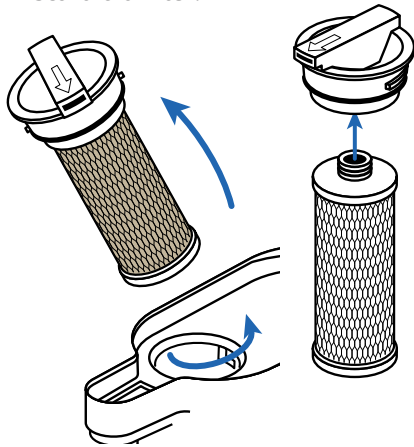


2. Remove plastic from new filter. Press new filter into filter chamber cap ensuring a snug fit. Insert into housing unit and twist right to close.

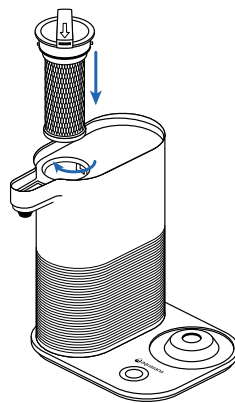

3. Fill water tank and place on dispenser dock.

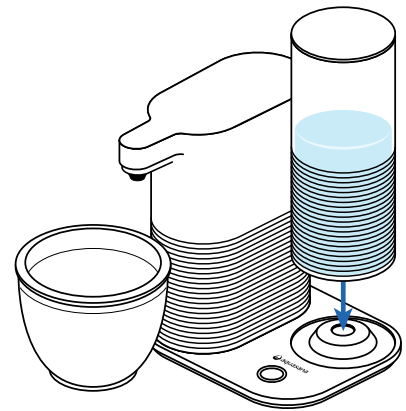


4. Press dock button 3 times quickly. Light will illuminate red for 5 seconds.

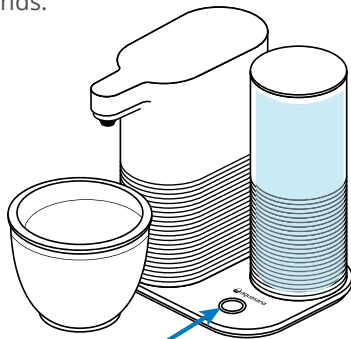

Press 3X Quickly
Solid Red for 5 seconds


5. While red light is illuminated, press and hold dock button for 1 second. Light will blink red. While system flushes, light will change from red to blue staying blue for 5 seconds when flush is complete.



Press & Hold for 1 second
Blinks Red for 60 seconds

6. Once the flush is complete, light blinks blue for 5 seconds, then illuminates solid blue for 5 seconds.

NOTE:
Do not drink flushed water. Discard water.

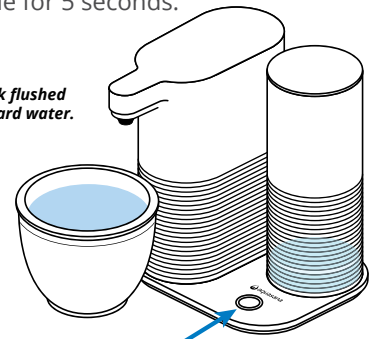

Blinks Blue for 5 seconds
Solid Blue for 5 seconds



Protect your investment and save money with our Water for Life program.



Extended
Warranty



Discount
Replacements




Free
Shipping



No
Contract

CONTACT US TO LEARN MORE waterforlife@aquasana.com



For the full list of contaminants filtered, scan to view the Performance Data Sheet on AquaSana.com.

The recommended replacement frequency for the AQ-CWM-B is every 6 months or 300 gallons of use. Use only certified, genuine AquaSana replacement filters for continued contaminant removal and system performance.

AQUASANA, INC.
6310 Midway Road
Haltom City, Texas 76117
USA 866.662.6885 • CAN877.332.7873
www.aquasana.com