
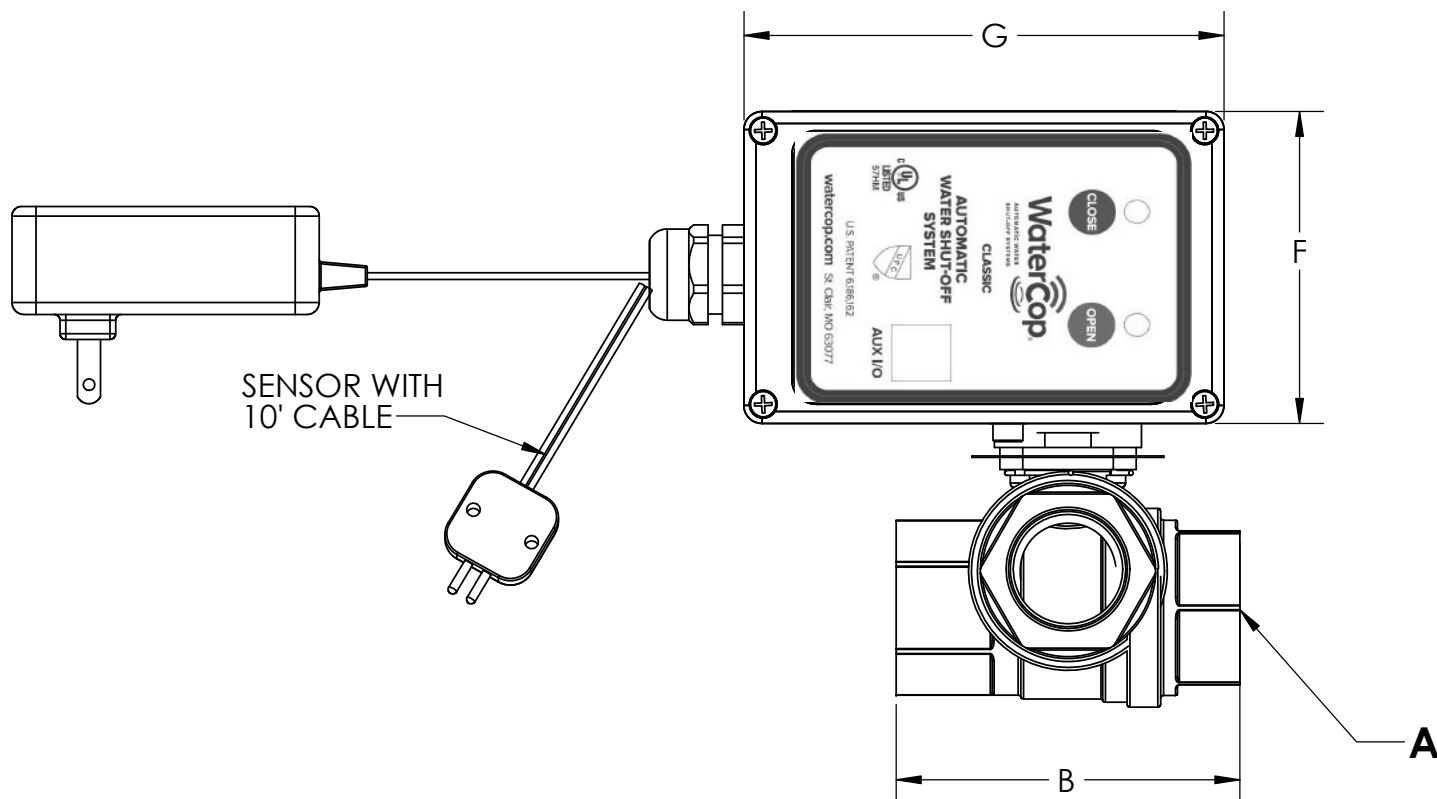


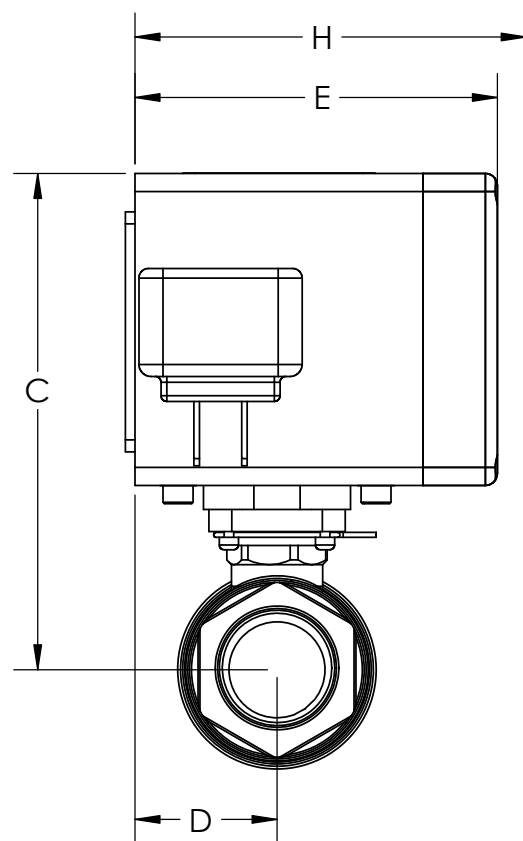

**NOTE: WCDACTHW HAS 1 SENSOR CABLE ATTACHED
WCDACTHW2 HAS 2 SENSOR CABLES ATTACHED**

**ALL VALVES ARE CERTIFIED TO
NSF/ANSI 372 FOR USE WITH POTABLE WATER**

Enclosure: Polycarbonate
Power: Power Converter With 20' Cord
Controls: Local Controls
Valve: Full Port Brass Ball Valve
Frequency: 418 MHz

Model	Valve Size	A	B	C	D	E	F	G	H	Flow GPM
WCDACTHW	-	-	-	-	.74	3.78	4.10	5.00	4.05	-
WCDACTHW	1/2	1/2 - 14 NPT	2.60	4.78	.74	3.78	4.10	5.00	4.05	19
WCDACTHW	3/4	3/4 - 14 NPT	2.90	5.02	.74	3.78	4.10	5.00	4.05	34
WCDACTHW	1	1 - 11-1/2 NPT	3.56	5.19	.74	3.78	4.10	5.00	4.05	52
WCDACTHW	1-1/4	1-1/4 - 11-1/2 NPT	3.66	5.18	.74	3.78	4.10	5.00	4.05	77

**UNCONTROLLED
DRAWING**

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED, LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO. WaterCop Classic HW

FILE NO.
SUB389

**Actuator with Hard Wired Sensor
shown with valve attached**

DR MJP DATE 07-02-25 CHKD MJP DATE 03-07-17 ENGR MJP DATE 032-07-17

