Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

EPICKA UTA513N065

EPICKA Air 65W Universal Travel Adapter User Manual

Model: UTA513N065

Introduction

The EPICKA Air 65W Universal Travel Adapter is a compact and versatile charging solution designed for global travelers. It integrates multiple plug types and offers high-speed charging for a variety of electronic devices. This manual provides essential information on its features, setup, operation, and safety guidelines.

Product Features

- **Worldwide Compatibility:** Equipped with 4 different plug types (Type C, G, I, A) for use in over 200 countries and regions.
- **65W PD Fast Charging:** The USB-C3 port delivers up to 65W Power Delivery for rapid charging of smartphones, tablets, and laptops. During multi-port use, the C3 port maintains 40W PD.
- **Compact 5-in-1 Design:** Features 1 AC socket, 3 USB-C ports, and 1 USB-A port in an ultra-compact unit (3.15 × 1.97 × 1.19 inches) with foldable prongs.
- **GaN Technology:** Utilizes Gallium Nitride (GaN) technology for a slimmer, more efficient design with lower heat generation.
- **Multi-Device Charging:** Capable of charging up to 5 devices simultaneously.
- **Safety Protections:** Includes overvoltage, short circuit, overcurrent, and overheating protection, along with a built-in 8A fuse for overload protection.

Setup

The EPICKA Air 65W Universal Travel Adapter features retractable prongs for various international outlets. To deploy the correct plug type:

1. Identify the required plug type for your destination (e.g., Type C for Europe, Type G for UK, Type I for Australia,

Type A for USA).

2. Locate the corresponding slider on the side of the adapter.
3. Slide the tab forward to extend the prongs for the desired region. Ensure the prongs are fully extended and locked into place before use.
4. To retract, press the release button (if present) and slide the prongs back into the adapter body.


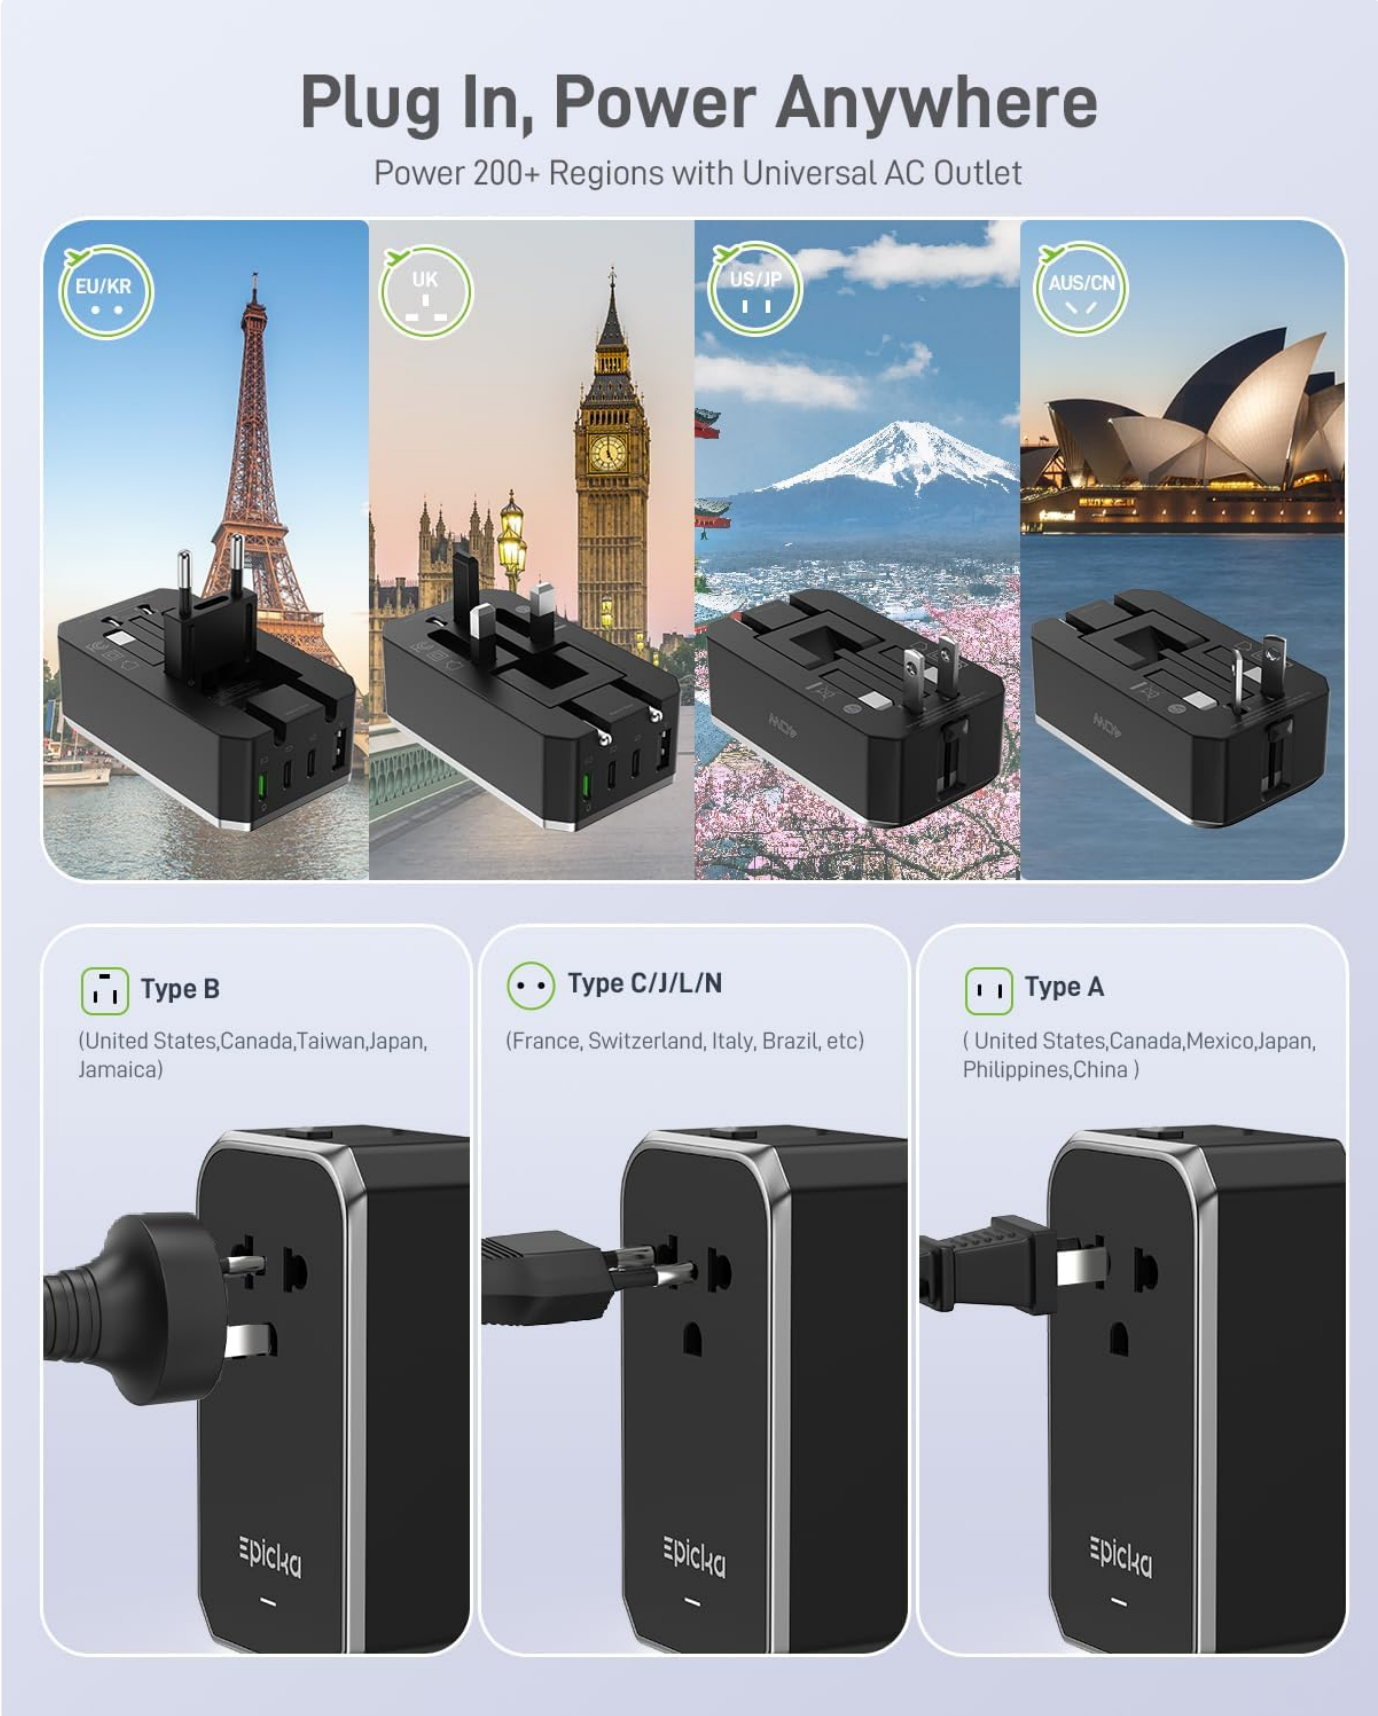


Diagram illustrating the different plug types (EU/KR, UK, US/JP, AUS/CN) and their corresponding regions.

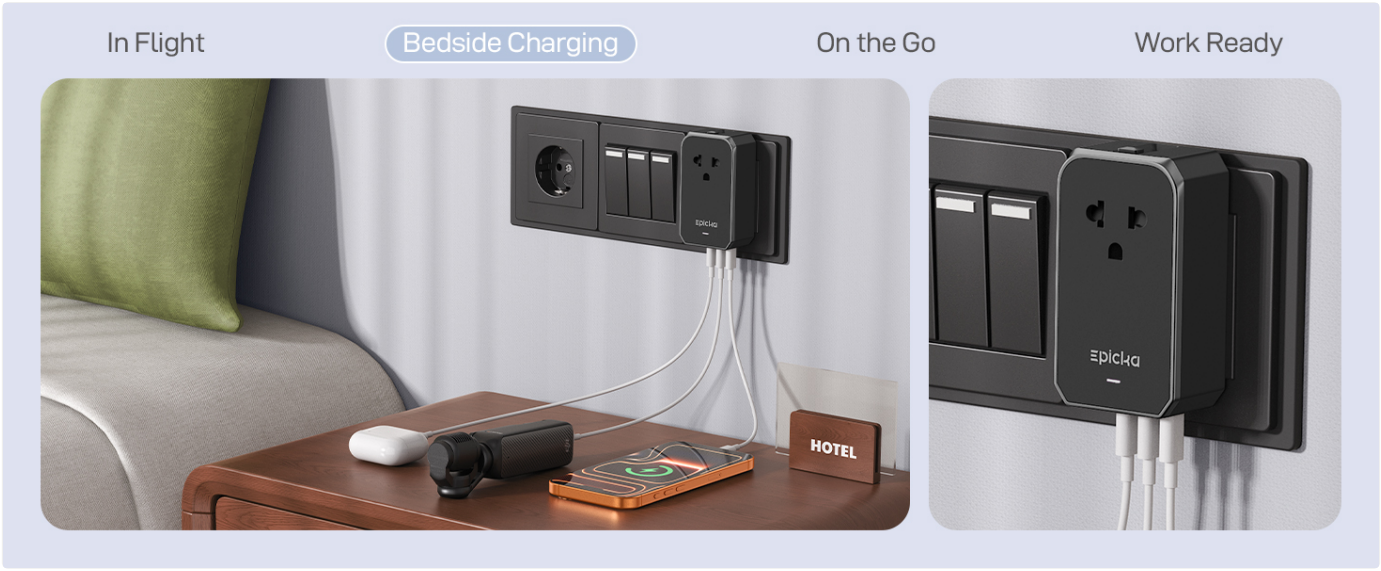

Images demonstrating how to deploy Type B, Type C/J/I/L/N, and Type A plugs.

Operating Instructions

Once the appropriate plug is deployed and inserted into a wall outlet, the adapter is ready for use. Connect your devices to the available ports:

- **AC Outlet:** Use for devices requiring a standard AC plug (e.g., laptop chargers, small appliances). Ensure your device supports 100-240V dual voltage.
- **USB-C Ports (C1, C2, C3):** Connect USB-C compatible devices. USB-C3 offers up to 65W PD fast charging.
- **USB-A Port:** Connect standard USB-A compatible devices.

Charging Multiple Devices:
The adapter intelligently distributes power. While USB-C3 can provide 65W when used alone, the output will adjust when multiple ports are in use. For optimal fast charging of a primary device, prioritize using USB-C3. Refer to the power output diagrams below for detailed wattage distribution.



The adapter charging a laptop, phone, smartwatch, and earbuds simultaneously.



Diagram illustrating power output for single-port usage.



Diagram illustrating power output for dual-port usage.



Diagram illustrating power output for multi-port usage.

Important Safety Information

THIS TRAVEL PLUG ADAPTER IS NOT A VOLTAGE CONVERTER.


It only supports 100-240V dual voltage products. It does not convert voltage. To use AC-powered devices abroad, you must ensure they support dual voltage (e.g., "100-240V, 50/60Hz" printed on the device or its power supply). Do not use with appliances that require voltage conversion, such as:

- Hairdryers
- Hair straighteners/curling irons
- Electric toothbrushes
- Razors
- Other high-power appliances that do not explicitly state dual voltage compatibility.

The adapter includes 5 levels of safety protection: Overvoltage Protection, Short Circuit Protection, Overcurrent Protection, Overheating Protection, and a Built-in 8A Fuse for Overload Protection. Do not attempt to bypass or modify these safety features.



Internal view of the adapter highlighting safety protections and a clear warning that it is not a voltage converter.

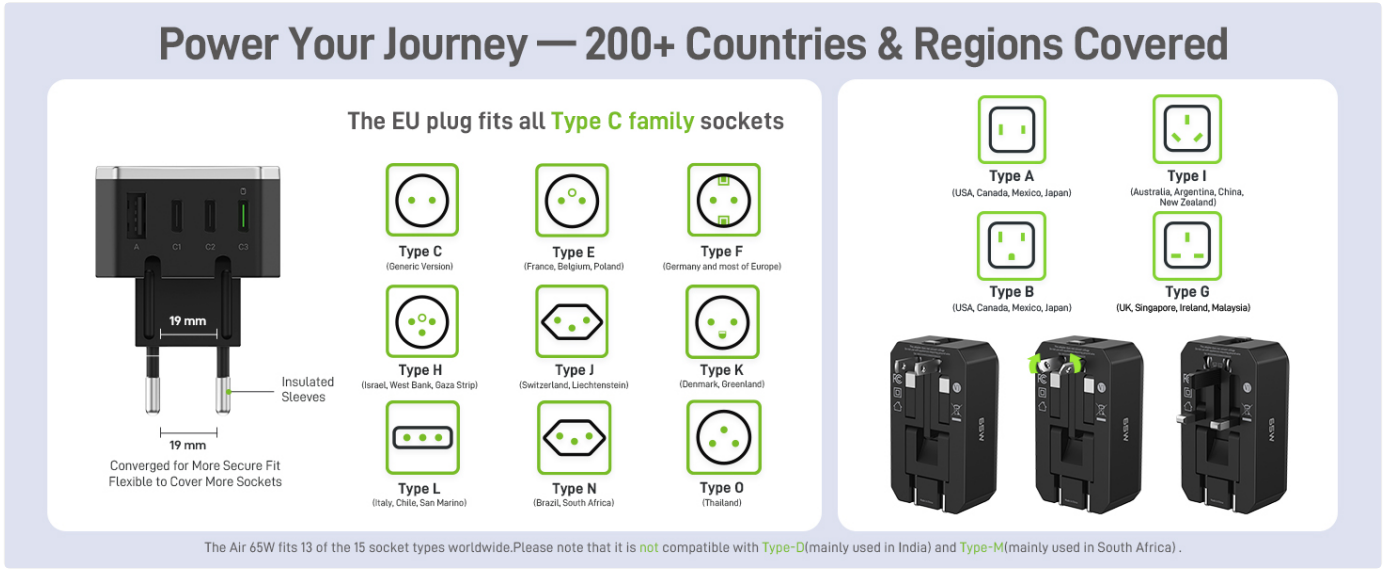

Visual warning against using the adapter with high-power appliances like hairdryers, as it is not a voltage converter.

Specifications

Feature	Detail
Brand	EPICKA
Model Number	UTA513N065
Item Weight	140 g
Item Dimensions (L x W x H)	3.46 x 1.2 x 1.99 inches
Plug Formats	Type C, Type G, Type I, Type A
Number of Outlets	1 AC
Number of USB Ports	3 USB-C, 1 USB-A
Max Power Output	65W (USB-C3 single port)
Input Voltage	100-240V AC
Fuse Rating	8A

Maintenance

- Keep the adapter clean and dry. Avoid exposure to moisture or extreme temperatures.
- Do not attempt to disassemble or repair the adapter yourself. This may void the warranty and pose safety risks.
- If the adapter's fuse blows due to overload, it may need replacement. Consult the manufacturer's support for guidance.

- Store the adapter in its carrying bag when not in use to protect it from dust and damage.

Troubleshooting

- **Device not charging:** Ensure the adapter is securely plugged into a live wall outlet. Check that your device's charging cable is properly connected to both the adapter and the device. Verify that your device is compatible with the adapter's voltage and power output.
- **Slow charging:** If multiple devices are connected, the power output per port may be reduced. For fastest charging, use the USB-C3 port with a single device. Ensure your cable supports fast charging.
- **Adapter not working:** Check if the wall outlet is functional. If the adapter has an indicator light, ensure it is on. If the adapter suddenly stops working, the internal fuse might have blown due to an overload. Do not attempt to replace the fuse yourself; contact customer support.
- **Loose fit in outlet:** While designed for a stable fit, some older or worn outlets may not provide a secure connection. Try a different outlet if available.

Warranty and Support

EPICKA products are designed for reliability and performance. For warranty information, technical support, or any questions regarding your EPICKA Air 65W Universal Travel Adapter, please visit the official EPICKA website or contact their customer service directly. Keep your purchase receipt as proof of purchase for warranty claims.
EPICKA Official Website: Visit the EPICKA Store on Amazon

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0GT1443LZ

More documents and user manuals: **https://manuals.plus/**