


## IN-DASH DIN STEREO INSTALLATION KIT FOR 2007 HYUNDAI ELANTRA (RADIO DELETE OPTION)

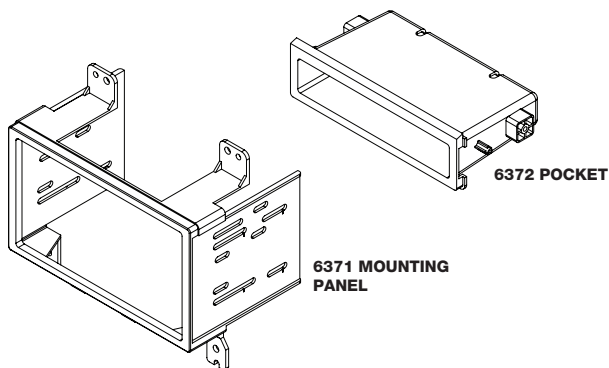

### INTRODUCTION/PRELIMINARY

This premium installation kit is for 2007 Hyundai Elantra vehicles. Included are all the parts you need to mount your car stereo or CD player into your vehicle's dash. Refer to the individual instruction in this manual to remove your vehicle's factory radio and assemble the kit.

#### CAUTION

**DISCONNECT YOUR VEHICLE'S NEGATIVE BATTERY TERMINAL BEFORE THE INSTALLATION TO HELP PREVENT ELECTRICAL DAMAGE. WE RECOMMEND THE USE OF A VOLT/OHM METER OVER A TEST LIGHT TO CHECK WIRING. A TEST LIGHT OR GROUNDED WIRE PROBE CAN CAUSE DAMAGE TO THE VEHICLE'S COMPUTER AND/OR DIAGNOSTIC SYSTEMS. AVOID ALL FACTORY AIRBAG WIRING - AIRBAGS CAN ACCIDENTALLY DEPLOY CAUSING SERIOUS INJURY OR DEATH.**

#### NOTES

- See your vehicle's instructions for any special tools your installation might require.
- Read all instructions accompanying your car stereo for proper wiring and mounting instructions.

### FACTORY WIRING CODES

For Factory Wiring Codes go to: [www.scosche-cars.com](http://www.scosche-cars.com)

#### CAR STEREO CONNECTORS


PROVIDE EASY CONNECTION OF YOUR CAR STEREO TO FACTORY WIRING HARNESS.

##### HY07B

2007 Hyundai Elantra

##### HY08B

2007 Hyundai Elantra  
Premium Sound Only

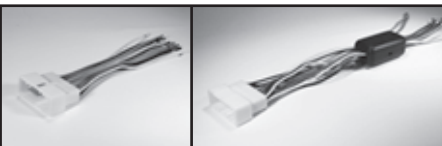

### LIABILITY DISCLAIMER

This instruction booklet is based on carefully documented data and research of automobile dash disassembly, wire harness/ codes and information pertaining to installation of this kit (HY1615B) in 2007 Hyundai Elantra vehicles. Scosche Industries, Inc. can not be held responsible for discrepancies/inconsistencies that may occur due to the automobile manufacturing changes or options, or damage that may occur in the automobile during the installation of components while using this booklet.

### FACTORY STEREO REMOVAL


#### RADIO REMOVAL:

1. Using a panel removal tool, remove the dash bezel around the radio. Disconnect and remove panel.
2. Extract (4) Phillips head screws securing the radio to the dash. Disconnect and remove.

### MOUNTING THE STEREO

#### ATTACHING THE SINGLE DIN STEREO

1. Align and position the aftermarket stereo with the left and right mounting brackets, starting from the back of the mounting panel.
2. Slide the aftermarket stereo into the top position of the kit as shown.
3. Use the hardware supplied with the aftermarket stereo and mount the radio to the 6371 mounting panel.
4. Slide the pocket into the bottom portion of the kit, then secure with supplied screws.

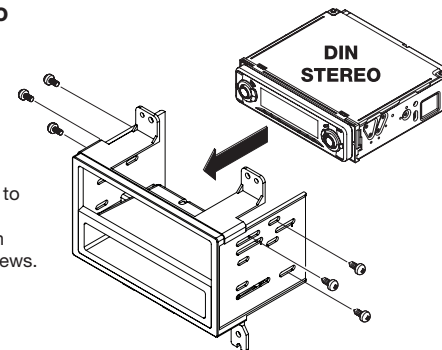

#### ATTACHING THE DOUBLE DIN STEREO

1. Align and position the aftermarket double din stereo with the left and right mounting brackets, starting from the back of the mounting panel.
2. Slide the aftermarket stereo into the top position of the kit as shown.
3. Use the hardware supplied with the aftermarket stereo and mount the radio to the 6371 mounting panel.

NOTE:  
REAR SUPPORTING THE STEREO  
ADDS TO THE INSTALLATION'S  
STRUCTURAL INTEGRITY. REAR  
SUPPORT AVAILABLE SEPARATELY.

