



[Manuals.plus](#) /

› [Bellemave](#) /

› Bellemave Twin Loft Bed with L-Shaped Desk and Charging Station Instruction Manual

Bellemave FST00259-TB-AB1

Bellemave Twin Loft Bed with L-Shaped Desk and Charging Station Instruction Manual

Model: FST00259-TB-AB1

1. INTRODUCTION

This manual provides detailed instructions for the assembly, operation, maintenance, and safety of your Bellemave Twin Size Loft Bed with L-Shaped Desk and Charging Station. Please read all instructions carefully before assembly and use to ensure proper function and safety.



Figure 1: Bellemave Twin Loft Bed with L-Shaped Desk and Charging Station.

2. SAFETY INFORMATION

Your safety is paramount. Adhere to the following guidelines to prevent injury or damage to the product.

- **Anti-Tipping Device:** Always secure the bed to the wall using the provided Anti-Tipping Nails to prevent tipping. Failure to do so can result in serious injury.
- **Top Bunk Safety:** Ensure the top of the mattress is at least 5 inches (12.7 cm) from the edge of the guardrail. Recommended mattress thickness is 4-6 inches (10-15 cm).
- **Weight Capacity:** Do not exceed the maximum weight capacity of 400 pounds (181 kg) for the loft bed.
- **Assembly:** Follow all assembly instructions carefully. Incorrect assembly can lead to instability and potential injury.
- **Foot Pads:** The bed legs are equipped with wear-resistant foot pads to prevent sliding and reduce noise. Ensure they are properly installed.
- **Regular Checks:** Periodically check all bolts and connections to ensure they remain tight and secure.

Anti-Topping Device

Please fix the bed to the wall for stability and security



Figure 2: Anti-Topping Device installation detail. Fix the bed to the wall for stability and security.



Figure 3: Top bunk with 12-inch full-length and enclosed guardrail, ensuring safety while sleeping.

3. PACKAGE CONTENTS

Before beginning assembly, verify that all components listed below are present and undamaged. If any parts are missing or damaged, do not proceed with assembly and contact customer support.

- Metal Bed Frame Components
- L-Shaped Desk Panels
- Ladder
- Guardrails
- Metal Slats
- Charging Station Unit
- Assembly Hardware (screws, bolts, nuts, washers)
- Anti-Tipping Nails
- Assembly Tools (e.g., Allen wrench)

4. ASSEMBLY INSTRUCTIONS

Assembly of this loft bed requires careful attention to detail. It is recommended to have two adults for assembly. Please follow the provided step-by-step instructions and diagrams.

4.1 Preparation

- Clear a spacious area for assembly.
- Lay out all components and hardware, matching them against the package contents list.
- Ensure you have the necessary tools (usually an Allen wrench is included, but a screwdriver might also be helpful).

4.2 Frame Assembly

1. Begin by assembling the main vertical and horizontal metal frame sections. Use the provided bolts and tighten them securely, but do not fully tighten until the entire frame is assembled.
2. Attach the metal slats to the bed frame. The buckle design simplifies installation steps. Ensure all slats are evenly spaced and securely fastened.

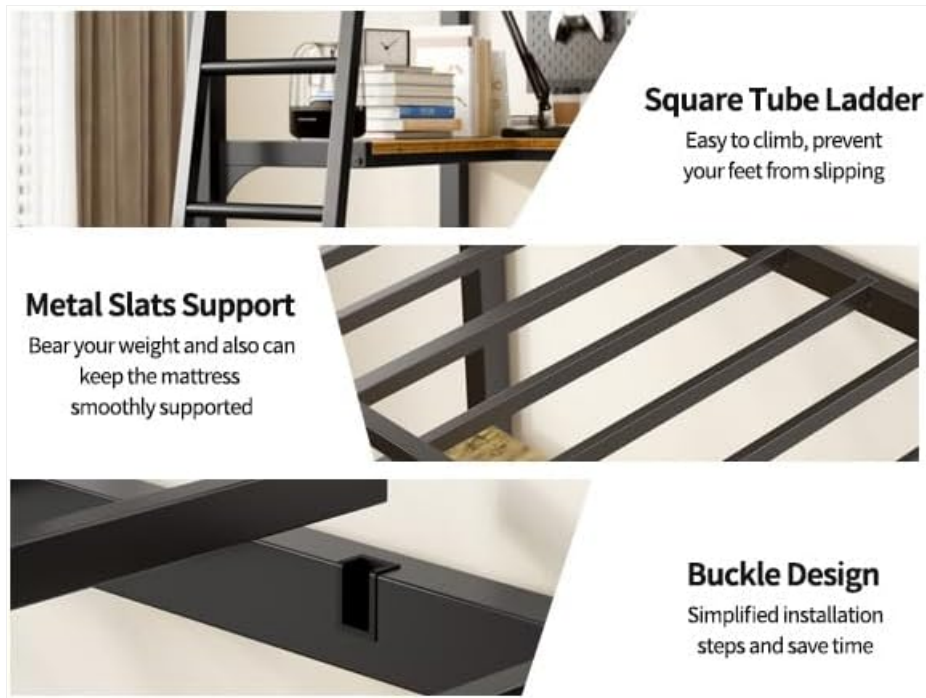


Figure 4: Square tube ladder, metal slats support, and buckle design for simplified installation.

4.3 Ladder and Guardrail Installation

3. Attach the sloping ladder to the designated side of the bed frame. Ensure it is firmly secured for safe climbing.
4. Install the full-length guardrails around the top bunk. Verify that they are securely attached to prevent falls.

4.4 L-Shaped Desk and Charging Station Assembly

5. Assemble the L-shaped desk panels and attach them to the bed frame supports. Use the angle codes and silent clips for a stable and quiet setup.
6. Integrate the charging station into the designated slot on the desk. Connect its power cord to a suitable wall outlet.



L Shaped Desk



Stable Ladder



Silent Clips



Angle Code

Figure 5: Details of the L-shaped desk, stable ladder, silent clips, and angle code for secure assembly.

Built in multifunctional socket

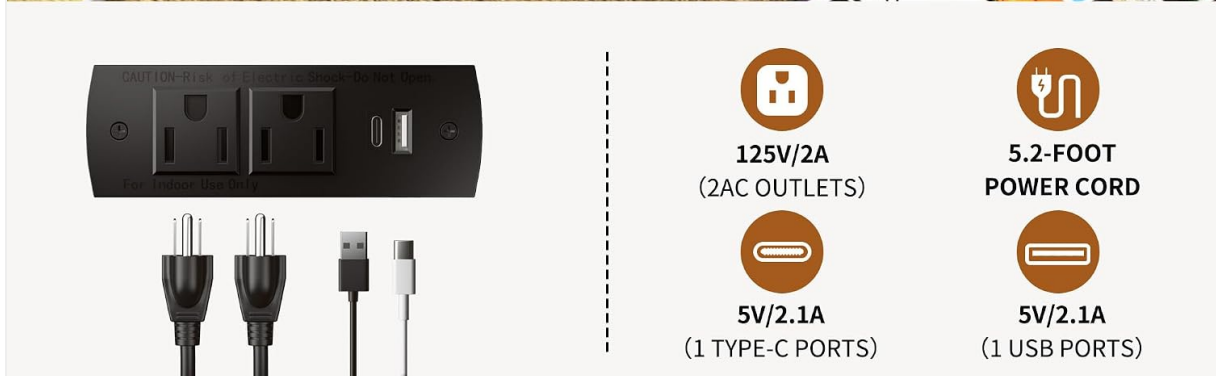


Figure 6: Built-in multifunctional socket with 2 AC outlets (125V/2A), 1 USB-A port (5V/2.1A), and 1 USB-C port (5V/2.1A), featuring a 5.2-foot power cord.

4.5 Final Steps

7. Once all components are in place, fully tighten all bolts and screws.
8. Install the Anti-Tipping Nails to securely fasten the bed to the wall.
9. Place your twin-size mattress on the top bunk, ensuring it meets the guardrail height requirements.

5. OPERATING INSTRUCTIONS

The Bellemave Twin Loft Bed is designed for versatile use, providing both a sleeping area and a functional workspace.

5.1 Using the Loft Bed

- Access the top bunk using the integrated ladder. Always face the ladder when climbing up or down.
- Ensure the mattress is properly positioned within the guardrails.

5.2 Utilizing the L-Shaped Desk

- The L-shaped desk provides a spacious area for studying, working, or gaming.

- Keep the desk surface clear of excessive weight to maintain stability.

5.3 Charging Station

- Plug the charging station's power cord into a standard wall outlet.
- Use the two AC outlets for devices requiring standard power.
- Use the USB-A and USB-C ports for charging compatible electronic devices.
- Do not overload the charging station. Refer to the specifications for maximum output.

6. MAINTENANCE

Regular maintenance will prolong the life and ensure the safety of your loft bed.

- **Cleaning:** Wipe metal surfaces with a soft, damp cloth. Avoid abrasive cleaners or harsh chemicals that could damage the finish. For the desk surface, use a mild cleaner suitable for wood or laminate.
- **Hardware Check:** Periodically (e.g., every 3-6 months) inspect all bolts, screws, and connections. Tighten any loose hardware to maintain structural integrity.
- **Anti-Tipping Device:** Ensure the anti-tipping device remains securely fastened to the wall and the bed frame.
- **Mattress Care:** Follow the manufacturer's guidelines for mattress care.

7. TROUBLESHOOTING

If you encounter any issues with your Bellemave Twin Loft Bed, refer to the following common problems and solutions.

- **Bed feels wobbly or unstable:**
 - Check all assembly bolts and screws. Tighten any that are loose.
 - Ensure the anti-tipping device is properly installed and secured to the wall.
 - Verify that the bed is on a flat, level surface.
- **Squeaking noises:**
 - Tighten all frame connections.
 - Ensure metal slats are properly seated and not rubbing against the frame.
 - Check the foot pads for proper placement.
- **Charging station not working:**
 - Verify that the charging station's power cord is securely plugged into a functional wall outlet.
 - Check if the device you are trying to charge is compatible and functioning correctly.
 - Avoid overloading the charging station.

If the issue persists after attempting these solutions, please contact Bellemave customer support.

8. SPECIFICATIONS

Detailed product specifications for the Bellemave Twin Loft Bed with L-Shaped Desk.

| | |
|---------------------|-----------------|
| Model Number | FST00259-TB-AB1 |
|---------------------|-----------------|

| | |
|---------------------------------------|---|
| Brand | Bellemave |
| Size | Twin |
| Material | Metal |
| Product Dimensions (L x W x H) | 77.48" x 42.36" x 72.83" (196.8 cm x 107.6 cm x 185 cm) |
| Item Weight | 43 Pounds (19.5 kg) |
| Maximum Weight Recommendation | 400 Pounds (181 kg) |
| Compatible Mattress Size | Twin |
| Included Components | Bed Frame, L-Shaped Desk, Guardrails, Ladder, Metal Slats, Charging Station |
| Charging Station Output | 2 AC Outlets (125V/2A), 1 USB-A Port (5V/2.1A), 1 USB-C Port (5V/2.1A) |
| Power Cord Length | 5.2 feet (1.58 meters) |
| Assembly Required | Yes |



Figure 7: Product dimensions including length, width, and height of the bed and desk components.

9. WARRANTY AND SUPPORT

Bellemave is committed to providing quality products. For any questions or concerns regarding your loft bed, please refer to the following information.

9.1 Return Policy

This product is eligible for a 30-day free return, refund, or replacement policy through Amazon. Please refer to your purchase details for specific terms and conditions.

9.2 Protection Plans

Extended protection plans may be available for purchase separately. These plans offer additional coverage beyond the standard return policy.

- **2-Year Protection Plan:** Available for 24 months of coverage.
- **3-Year Protection Plan:** Available for 36 months of coverage.
- **Complete Protect:** A monthly subscription plan covering eligible past and future purchases.

For details on pricing and terms for these protection plans, please refer to the product listing or contact the plan provider.

9.3 Customer Support

For assistance with assembly, missing parts, or any product-related inquiries, please contact Bellemave customer support through the retailer where the product was purchased.