

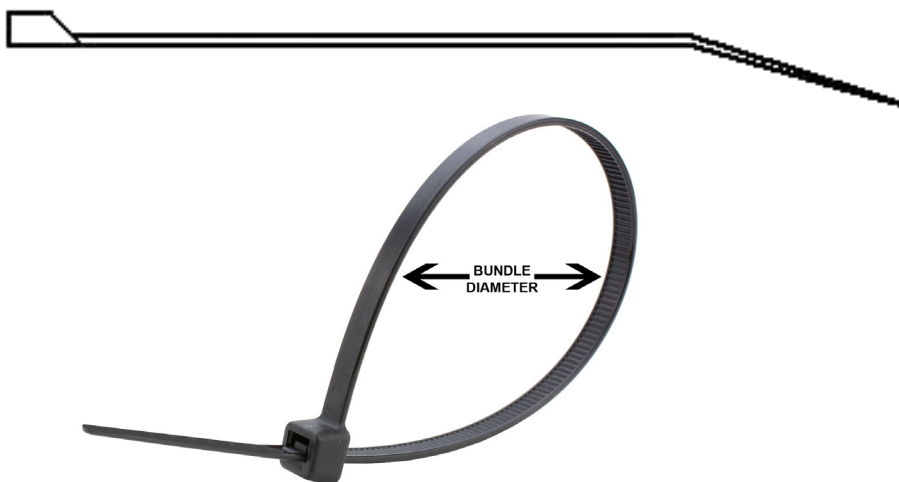


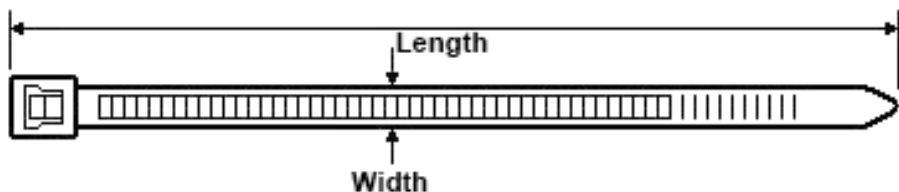

Part Number	Colour	Length (mm)	Width (mm)	Max. Bundle Diameter (mm)	Tensile Strength (kg)
ELCT100M	White	100	2.5	22	8
ELCT100M/1000	White	100	2.5	22	8
ELCT200M	White	203	2.5	55	8

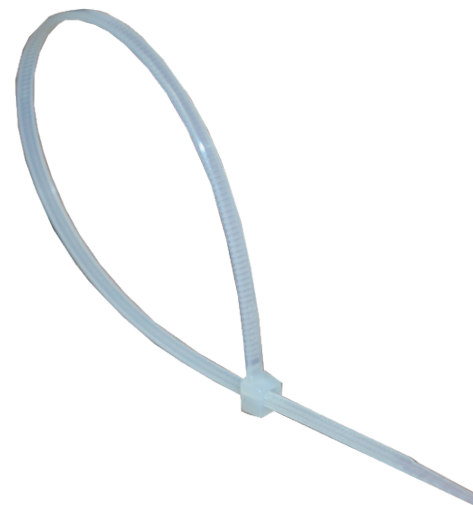

NOTES


1. Flammability of raw material: UL 94-V2
2. Maximum operating temperature: Up to 85°C
3. Low smoke and halogen free

DATE	DRAW	APPROVED	ECN NO.
29/06/2021	LIANA	ALEX	



PART NAME	ELEC PREMIUM EXTRA NYLON CABLE TIES WHITE	APPROVED	LIANA	N	MATERIAL	NYLON 66
		CHECK				
PART NO.	ELCT100M TO ELCT200M	DRAW	LIANA		SHEET	1/6

Pacific
components


1300 304 451
www.pacificcomponents.com.au



Spec

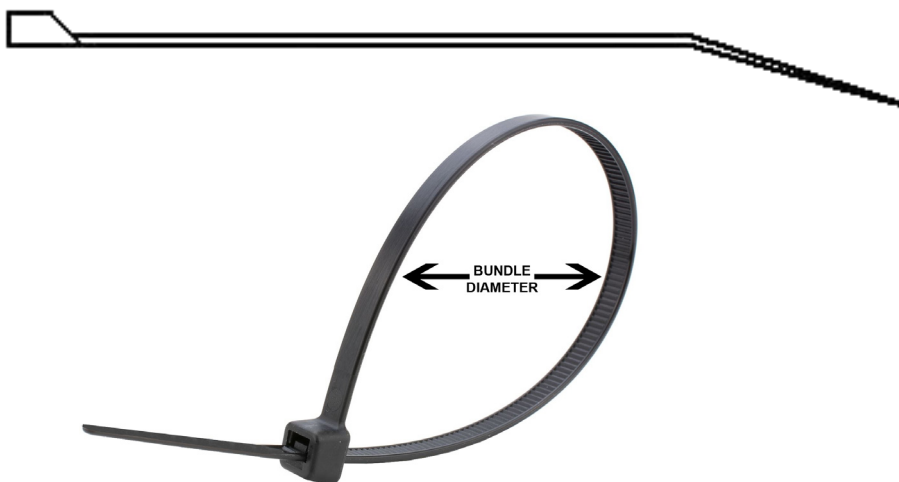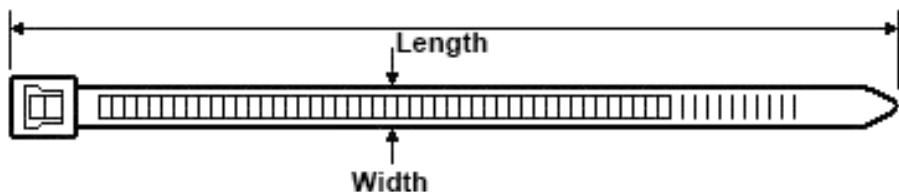

Part Number	Colour	Length (mm)	Width (mm)	Max. Bundle Diameter (mm)	Tensile Strength (kg)
ELCT140I	White	142	3.2	34	18
ELCT200I	White	203	3.6	52	18
ELCT300I	White	292	3.6	82	18

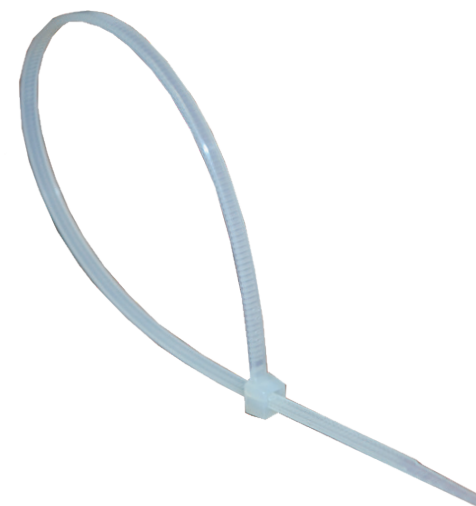

NOTES


1. Flammability of raw material: UL 94-V2
2. Maximum operating temperature: Up to 85°C
3. Low smoke and halogen free

DATE	DRAW	APPROVED	ECN NO.
29/06/2021	LIANA	ALEX	



PART NAME	ELEC PREMIUM EXTRA NYLON CABLE TIES WHITE	APPROVED	LIANA	N	MATERIAL	NYLON 66
		CHECK				
PART NO.	ELCT140I TO ELCT300I	DRAW	LIANA		SHEET	2/6

Pacific
components


1300 304 451
www.pacificcomponents.com.au



Spec

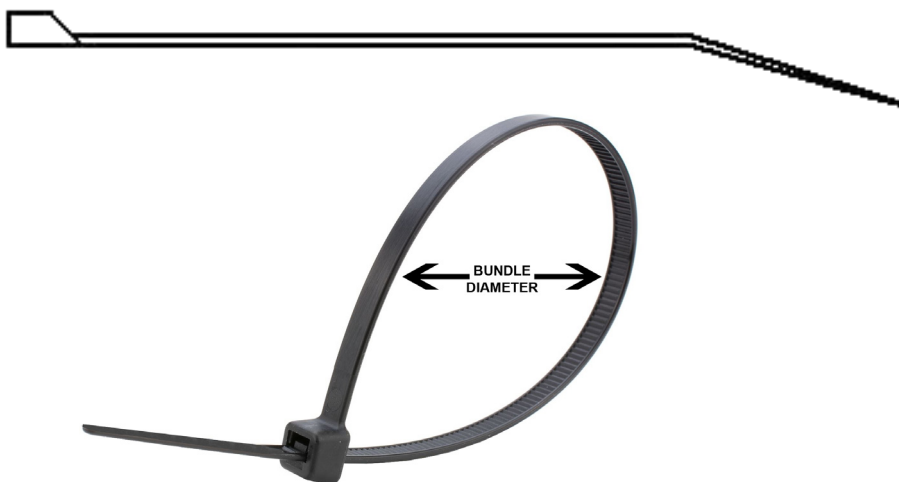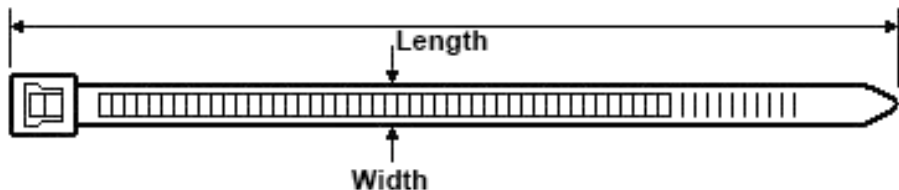

Part Number	Colour	Length (mm)	Width (mm)	Max. Bundle Diameter (mm)	Tensile Strength (kg)
ELCT160S	White	160	4.8	39	22
ELCT200S	White	203	4.8	52	22
ELCT280S	White	280	4.8	77	22
ELCT370S	White	368	4.8	105	22
ELCT430S	White	432	4.8	125	22

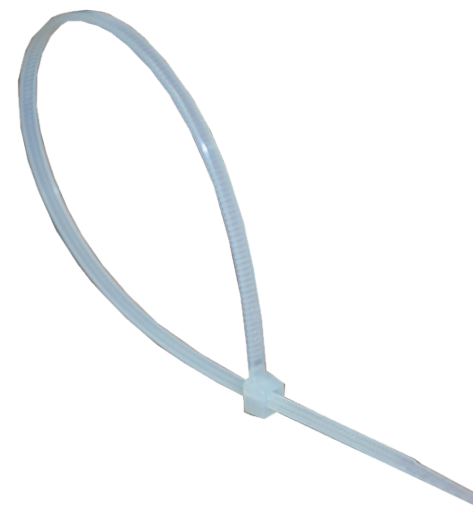

NOTES


1. Flammability of raw material: UL 94-V2
2. Maximum operating temperature: Up to 85°C
3. Low smoke and halogen free

DATE	DRAW	APPROVED	ECN NO.
29/06/2021	LIANA	ALEX	



PART NAME	ELEC PREMIUM EXTRA NYLON CABLE TIES WHITE	APPROVED	LIANA	N	MATERIAL	NYLON 66
		CHECK				
PART NO.	ELCT160S TO ELCT430S	DRAW	LIANA		SHEET	3/6

Pacific
components


1300 304 451
www.pacificcomponents.com.au



Spec

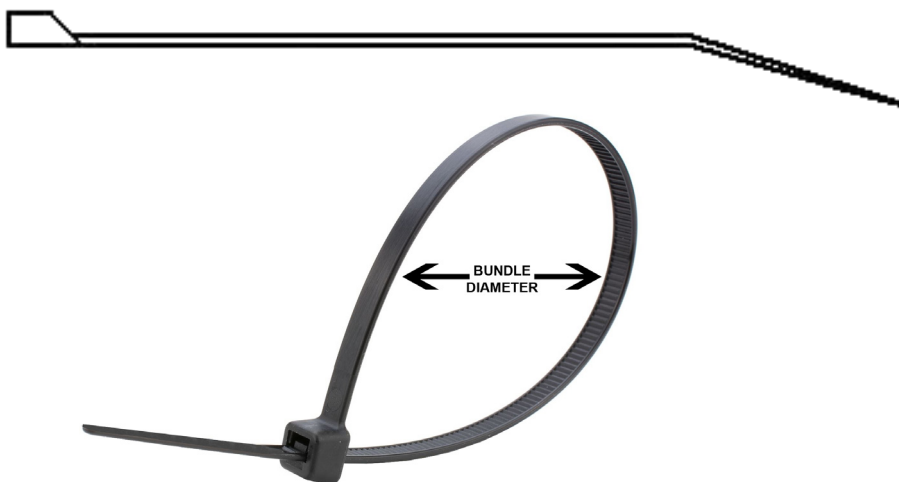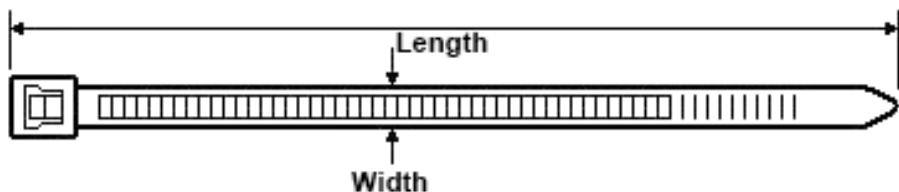

Part Number	Colour	Length (mm)	Width (mm)	Max. Bundle Diameter (mm)	Tensile Strength (kg)
ELCT200HD	White	203	7.6	52	55
ELCT300HD	White	300	7.6	80	55
ELCT370HD	White	370	7.6	101	55
ELCT530HD	White	550	8	160	55
ELCT760HD/100	White	762	9	227	80
ELCT810HD/100	White	812	9	243	80
ELCT1220HD/100	White	1219	9	372	80
ELCT1500HD	White	1500	9	462	80

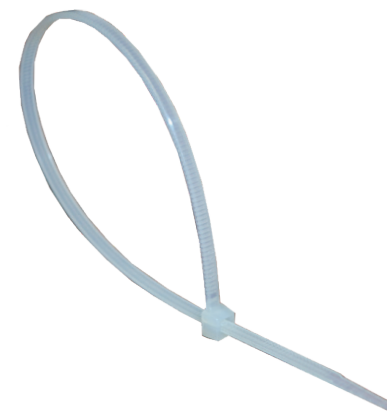

Lloyd's Register



cUL US



NOTES


1. Flammability of raw material: UL 94-V2
2. Maximum operating temperature: Up to 85°C
3. Low smoke and halogen free

DATE	DRAW	APPROVED	ECN NO.
29/06/2021	LIANA	ALEX	

PART NAME	ELEC PREMIUM EXTRA NYLON CABLE TIES WHITE	APPROVED	LIANA	N	MATERIAL	NYLON 66
		CHECK				
PART NO.	ELCT200HD TO ELCT1500HD	DRAW	LIANA		SHEET	4/6


Pacific
components

1300 304 451
www.pacificcomponents.com.au



Spec

Certification Institute	
	Underwriters Laboratories, Inc
	Underwriters Laboratories, Inc
	VDE Prüf- und Zertifizierungsinstitut
	Lloyd's Register of Shipping
	Det Norske Veritas & Germanischer Lloyd
	American Bureau of Shipping
	Conformity European

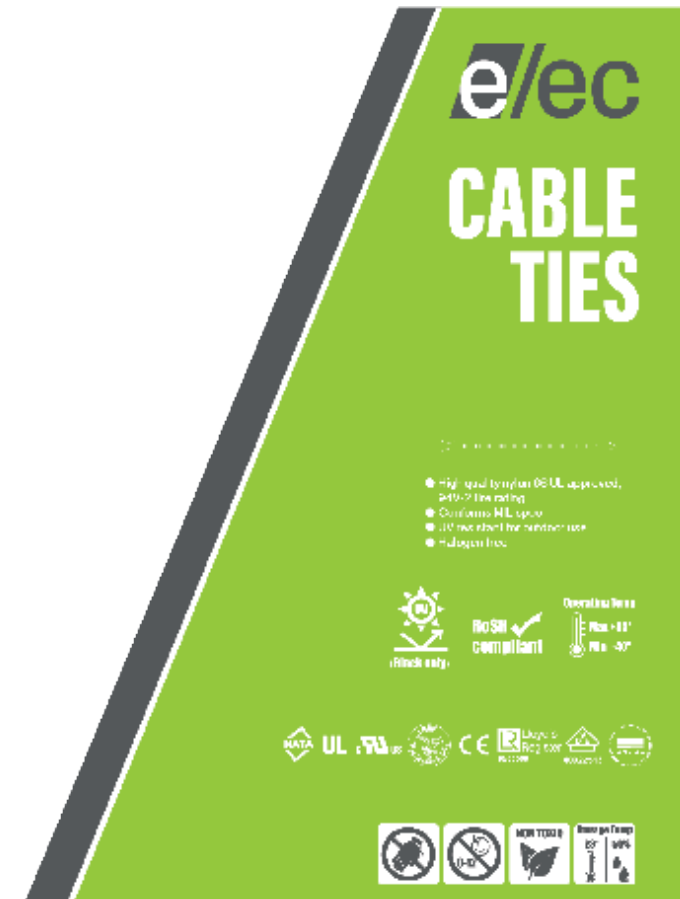

DATE	DRAW	APPROVED	ECN NO.
29/06/2021	LIANA	ALEX	

PART NAME	ELEC PREMIUM EXTRA NYLON CABLE TIES WHITE	APPROVED	LIANA	N	MATERIAL	NYLON 66
		CHECK				
PART NO.	ELCT200HD TO ELCT1500HD	DRAW	LIANA		SHEET	6/6
 1300 304 451 www.pacificcomponents.com.au						  Spec