



ATEN UH3230A USB-C Multiport Dock User Guide

[Home](#) » [Aten](#) » ATEN UH3230A USB-C Multiport Dock User Guide 

ATEN UH3230A USB-C Multiport Dock User Guide




Contents

- [1 Package Contents](#)
- [2 Hardware Overview](#)
- [3 Installation](#)
- [4 Operation](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)

Package Contents

- 1 UH3230A Multiport Dock with Power Charging
- 1 power adapter
- 1 USB-C cable
- 1 user instructions

Hardware Overview

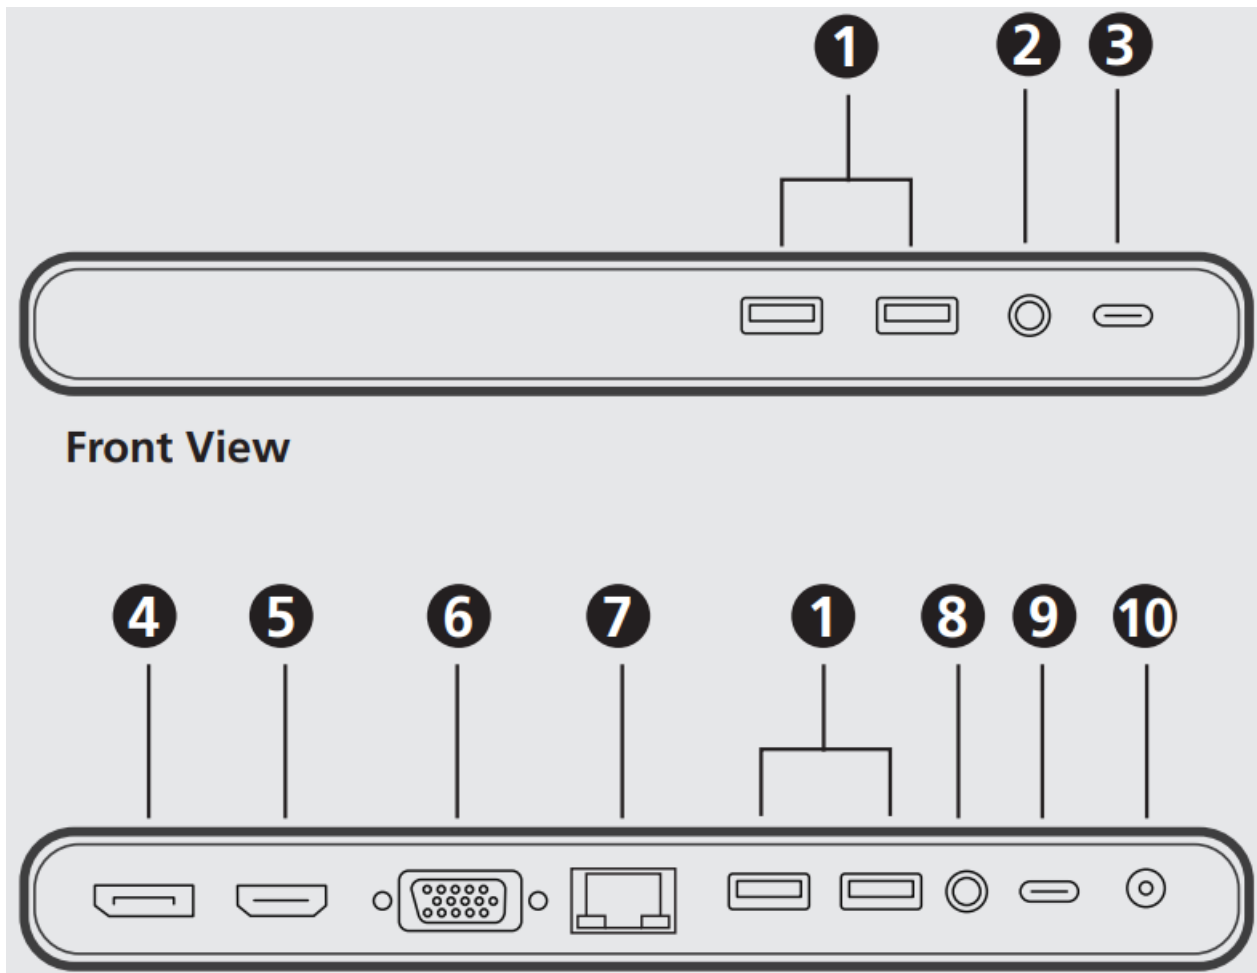

1. USB 3.2 Gen 1 Type-A ports.
2. Headphone jack with microphone¹
3. USB-C host port
4. DisplayPort out
5. HDMI out
6. VGA out
7. Ethernet port
8. audio out1
9. USB-C PD 3.0 DC-in port² (supports USB 3.0 Gen 1 Type-C port data transfer)
10. power jack

Note:

1. When both the audio out and headphone jack with microphone are connected to an audio device, the latter takes precedence over the former.
2. To use the USB-C DC-in port, an additional USB-C PD (LPScertified) power adapter required.

Host Requirement


USB-C enabled computer or smartphone / tablet with one of the following operating systems:

- Windows® 10 (32-bit / 64-bit) with 7th-Gen Intel Core Processor or above
- MacOS X 10.12 or later

- iPadOS 13.1 or later
- Android 8.0 or later

Note: To transmit video through a USB-C port, make sure your computer supports DP Alt Mode over the USB-C port, and that it has been enabled.

Installation

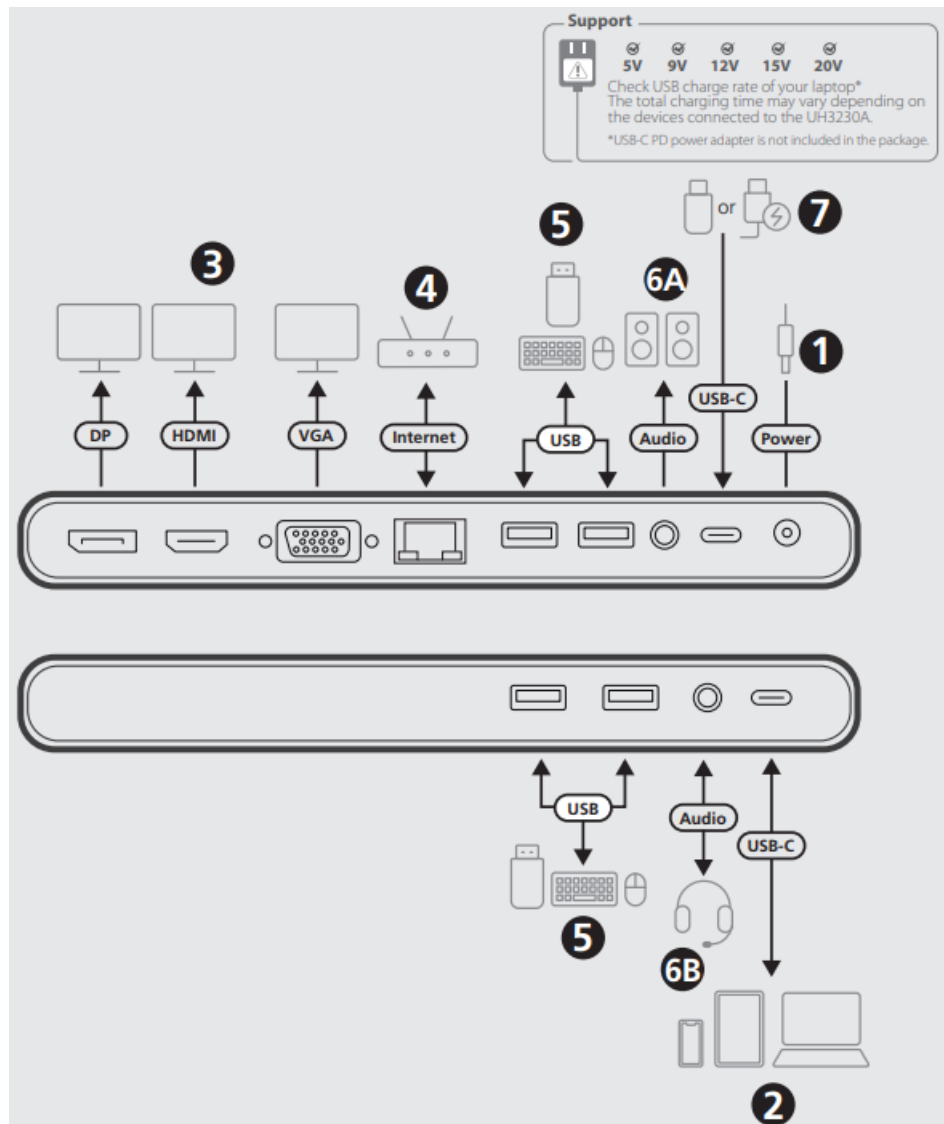

1. Supply power to the unit, thereby turning it on, by plugging the power adapter provided into a power source, and plug its cable into the unit's power jack.
2. Connect a USB-C enabled computer to the unit's USB-C host port.
3. Connect up to 2 displays to the VGA, HDMI, and DisplayPort output ports.

Note:

1. The recommended lengths of the cables used to connect to the displays shall not exceed 5 m.
2. For MacOS, only 1 display can be used in Extended Mode; when 2 displays are connected, only Mirror Mode is supported.
4. Connect an Ethernet cable to the unit's Ethernet port for internet access.
5. Connect USB peripheral devices to the unit's USB 3.2 Gen 1 Type-A ports.
6. Connect the unit to an audio device by doing one of the following:

- A. Connect a set of speakers to the unit's audio jack.
 - B. Connect a headphone to the unit's headphone jack with microphone.
7. Optional) Connect a USB-C PD power adapter or a USB-C peripheral device to the unit's USB-C DC-in port, respectively for power redundancy or peripheral device operation.

Operation

Monitor / Sound Settings for Mac External Monitor Settings:

Option 1: Extend Mode

1. Open System Preferences and click Displays.
2. Click on Arrangement to change the position of the connected displays.

Option 2: Mirror Mode

1. Open System Preferences and click Displays.
2. Click on Arrangement.
3. Select and check Mirror Displays.

External Sound Settings

1. Open System Preferences and click Sound.
2. Click on Arrangement to change the sound output device to the UH3230A.

Support and Documentation Notice

All information, documentation, firmware, software utilities, and specifications contained in this package are subject to change without prior notification by the manufacturer.

To reduce the environmental impact of our products, ATEN documentation and software can be found online at <http://www.aten.com/download/>

Technical Support
www.aten.com/support


Scan for more information

ATEN Website





ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.
Released: 06/2021

Documents / Resources

	<p>ATEN UH3230A USB-C Multiport Dock [pdf] User Guide UH3230A, USB-C Multiport Dock, UH3230A USB-C Multiport Dock, Multiport Dock, Dock</p>
---	--

References

-  [ATEN - Simply Better Connections | ATEN U.S.A.](#)
-  [Downloads | ATEN Corporate Headquarters](#)

Manuals+