


aurender A1000 Network Player User Guide

Home » aurender » aurender A1000 Network Player User Guide 1

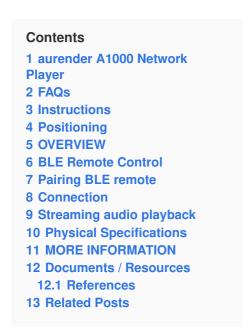

aurender

aurender A1000 Network Player



How do I pair the BLE remote control with the A1000?

To pair the BLE remote with the A1000, turn on the A1000, press the Play/Pause (#4) and BT (#13)
 buttons together for 5 seconds. The LED on the remote will start blinking in pairing mode. Once the LED stops blinking, the pairing is complete.

How should I connect the A1000 to my TV using ARC?

 To connect the A1000 to your TV using ARC, ensure your TV has HDMI ARC capability. Connect the A1000's ARC port with the TV's ARC input using an HDMI 1.4 or newer cable. Power on both devices and set up audio output to PCM on your TV for optimal performance.

Instructions

Please read the following instructions carefully before setting up the Aurender Music Player.

- Be careful not to drop the device to avoid internal damage.
- · Do not disassemble the device.
- Keep magnetic materials away from Aurender to prevent any damage to data.
- Do not expose device to oil, dust, water, high humidity or smoke.
- · Keep cooling fins free from obstruction.
- When cleaning, use only a soft cloth. Keep out of contact with water or other liquids.
- All servicing must be performed by a qualified representative or the warranty will be voided. Unplug
 power cord during severe lightning storms or when unused for a long period of time. Unplug
- the device from the outlet only after completely turning off the unit.
- Always turn the power off before connecting or disconnecting any cables.
- Please note that hard drives can fail break down.

It is important to backup your music collection periodically to a separate memory device. In the event of drive failure, Aurender is not responsible for any loss of data. The drive manufacturer will only replace faulty drives under warranty and will not compensate for any loss of data.

Positioning

- Place your device on a flat, horizontal, and stable surface.
- Keep away from heat sources, such as radiators.
- Allow space around the device for ventilation.
- Do not place inside an enclosed cabinet.

OVERVIEW


Front Panel



1. ON/OFF/Standby


- Pressing the illuminated power button will power the unit on and off. To power the A1000 on from standby, press the button once, so the Aurender display shows "Aurender A1000". If the A1000 is powered on, enter Standby mode by pressing the front panel button once, and the unit will turn off with a display message that says "shutting down, please wait". If the Aurender is powered on but the screen is off, you will hit the power button one time to wake the screen up and one more time to enter standby mode. *In standby mode, the Aurender is not reachable with the Conductor app. The power LED will flash during boot up and shut down. The flashing will stop when the boot procedure completes.
- 2. LCD Display
- 3. Volume Knob
- 4. Input selection
 - Press the button to toggle input A1000 BT ARC Coaxial Optical USB
- 5. IR Receive window
- 6. Output selection
 - Press the button to toggle output analog digital
- 7. Display Menu button
 - Press to cycle through 3 display options: Song Information, Playlist and Aurender IP. Songs from playlists
 may be selected using the four buttons on the right side of the front panel display. Use buttons 8 and 10
 to scroll between playlists and button 9 to select a playlist. After the playlist is selected, press button 9
 again to start playback. Once the playlist is selected, buttons 8 and 10 can be used to select songs within
 the selected playlist.
- 8. Play Previous button
 - Press to skip to the previous track.
- 9. Play/Pause button
 - Press to start or stop playback.
- 10. Play Next button
 - Press to skip to the next track

Rear Panel

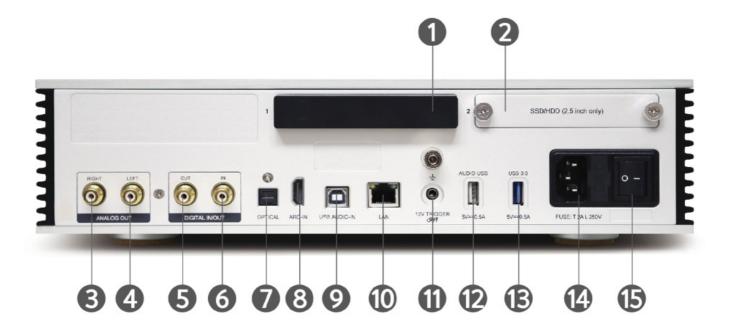

- 1. BT Antenna
- 2. HDD or SSD 2.5" Slot
- 3. Analog Audio Output RCA Right
- 4. Analog Audio Output RCA Left
- 5. Digital Audio Output Coaxial SPDIF (RCA)
- 6. Digital Audio Input Coaxial SPDIF (RCA)
- 7. Digital Audio Input Optical SPDIF
- 8. TV ARC Audio Input
- 9. USB Audio Input
- 10. Gbps LAN port
- 11. 12V Trigger Output
- 12. USB Audio 2.0 Out
- 13. USB 3.0 Data Port
- 14. AC Power Socket
- 15. AC Power Switch
 - Connect to a power outlet with AC Power cord.

BLE Remote Control

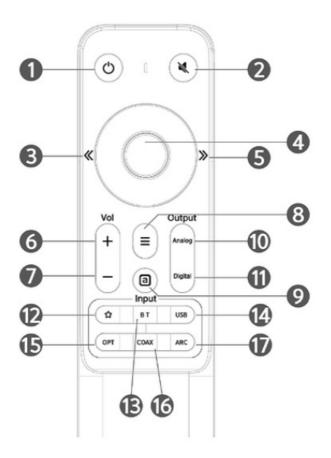


- 1. Power ON/OFF
- 2. MUTE
- 3. Play Previous
- 4. Play / Pause
- 5. Play Next
- 6. Volume Up
- 7. Volume Down
- 8. Display Menu
- 9. Input Aurender (SSD/HDD)
- 10. Output Analog
- 11. Output Digital
- 12. Input Google Cast
- 13. Input BT
- 14. Input USB
- 15. Input Optical
- 16. Input Coaxial
- 17. Input TV ARC

Pairing BLE remote

- 1. Turn on A1000.
- 2. Press #4 (Play/ Pause) and #13 (BT) button together for 5 seconds.
- 3. LED on remote will start blinking in pairing mode.
- 4. If LED stops blinking, it's done.

Connection

Connection to amplifier and router

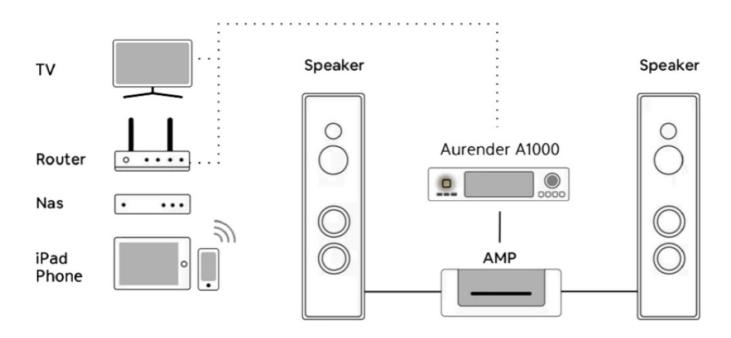

Connect A1000 with your TV using ARC

- 1. Check that your TV has HDMI ARC (Audio Return Channel) and connect the A1000's ARC port with this input using HDMI 1.4 or newer cable.
- 2. Connect main power to your A1000 unit and power it ON.
- 3. Power ON your TV, enable HDMI/ARC audio input from TV side. Make sure to setup audio output to PCM.
- 4. A1000 will now be operated from your TV via CEC commands from TV. This will allow you touse you TV remote to adjust volume of the A1000 and also the A1000 will power ON and OFFtogether with your TV.
- 5. A1000 will power on/off with TV only in ARC input mode.




Connect A1000 through BT:

1. Change input to "BT" mode by pressing remote button #13.

- 2. You can connect A1000 up to two devices thru BT.
- 3. For initial setting, it should be in pairing mode. Please press the "Menu" (3 lines) button on front panel or remote. The LCD will show "pairing request" message.



- 4. Please turn on BT on your phone and search for "A1000", then select it.
- 5. It will show "connecting" on LCD when trying to connect and show "connected" when done.
- 6. If two devices are already connected, you need to disconnect or unpair one of them toconnect another BT device. Otherwise, the below screen will show up when pressing "Menu" button.

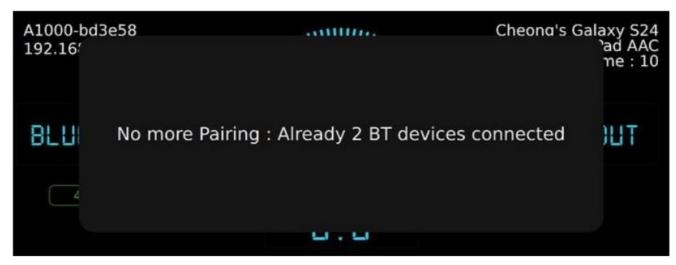

Streaming audio playback

Google Cast playback:

- 1. Make sure your playback device is on the same network as your A1000.
- 2. From any Google Cast supported App, you can find the Google Cast symbol, if it is on the same network as your A1000 system.
- 3. Simply press the logo and choose A1000.



Tidal Connect:

- 1. Play a song and tap on the "Now playing" bar.
- 2. Tap on the device selector at the top right.
- 3. Select a TIDAL Connect-enabled device (e.g. A1000).



Spotify Connect:

- 1. Use your phone, tablet or computer as a remote control for Spotify.
- 2. Go to www.spotify.com/connect to learn how.
- 3. The Spotify Software is subject to third-party licenses found here: www.spotify.com/connect/third-party-licenses



Physical Specifications

- Dimensions 13.8"W x 14"D x 3.8"H (3.3" w/o Feet)
- Weight 18.3lb (8.3kg)
- Material Machined Aluminum Chassis
- Front Panel Display 6.9" 1280 x 480 Wide IPS Color LCD
- Front Control Panel Power, Input, Output, Mode, Play/Pause, Next Track, Previous Track, Volume Jog
- Remote Control Bluetooth LE Remote control

Technical Specifications

- Power Supply Full Linear Toroidal
- CPU Quad-core 2.0Ghz CPU (ARM Coretex-A55)
- RAM 4GB DRAM
- Library Storage Capacity 1x 2.5"
- SSD for System & Cache 32G eMMC for the System, 120GB NVMe for Cache
- Data USB Ports 1x for external storage
- Software Suite Aurender Conductor
- Ethernet Port 100/1000 (Gigabit)
- Power Consumption Play (15W), Peak (20W), Standby (1.4W)
- ARC 1x ARC-in for TV ARC port
- 12V Trigger 1x for external equipment

Audio Specifications

- Analog Outputs RCA (Unbalanced)
- DAC Chipset AKM4490REQ Dual Mono
- Analog Outputs SupportedFormat Up To 32-bit / 768 KHz, DSD512(Native)
- Digital Outputs COAX RCA, USB external DAC Support
- USB Output SupportedFormat Up To 32-bit / 768 KHz, DSD512(Native)
- Digital Inputs COAX RCA, Optical/Toslink, USB Type B, ARC
- Compatible Formats DSD (DSF, DFF), WAV, FLAC, AIFF, ALAC, M4A, MQA and others
- Streaming ProtocolSupport Tidal Connect, Spotify Connect, Airplay
- Google Cast Audio Allows casting from: Qobuz, Youtube, Deezer, Bugs, Melon & others(up to 96khz/24 bit)
- Bluetooth up to AptX-HD

MORE INFORMATION

Warning

Before connecting audio cables, first check to see that all devices are grounded using grounded plugs and grounded sockets. In addition, all devices should be turned off, before connecting any audio or digital cables. If the devices are not grounded, a voltage potential difference between devices can cause a voltage surge through the audio cable that can weaken and eventually damage sensitive circuits in D/A converters and other devices.

Was this article helpful?

- Yes
- No

2 out of 2 found this helpful Have more questions? Submit a request

- · Recently viewed articles
- N150 Hardware Guide

Related articles

- Aurender Hardware Manual
- Aurender Quick Start Guide
- SSD/HDD Recommendations & Installation Guide
- Setting up a NAS server shared folder for use with Aurender Conductor
- What is the proper way to shut down my Aurender?

Powered by Zendesk

Documents / Resources



aurender A1000 Network Player [pdf] User Guide A1000 Network Player, A1000, Network Player, Player

References

- Spotify Connect
- Spotify for Developers
- **Q** Aurender
- □ FAQ Aurender
- State

 Third Party Licenses | Spotify for Developers
- User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.