



AV Access 4KIP204E 4K IP Encoder with 4 HDMI Inputs User Manual

[Home](#) » [AV Access](#) » AV Access 4KIP204E 4K IP Encoder with 4 HDMI Inputs User Manual 

Contents

- [1 AV Access 4KIP204E 4K IP Encoder with 4 HDMI Inputs](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Introduction](#)
- [5 Installation and Application](#)
- [6 Specifications](#)
- [7 Warranty](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)



AV Access 4KIP204E 4K IP Encoder with 4 HDMI Inputs



Product Information

The 4K IP Encoder with 4 HDMI Inputs (4KIP204E) is a versatile product that allows you to encode up to four HDMI inputs with resolutions supported up to 3840x2160p@30Hz. It offers flexible control options through front panel buttons and the VDirector App, available for IOS, Android, and Windows devices. This product is ideal for various applications such as sports bars, conference rooms, shopping malls, and digital signage, especially in spaces with limited installation and deployment options.

Features

- Includes four HDMI inputs
- No configuration required, works easily with an Ethernet switch
- Provides selection buttons to link the 4KIP200D decoder to the encoder
- Display Control buttons to transmit displays on/off commands to the decoders
- Plug and play functionality
- Supports visual control through a tablet/cellphone/PC
- Supports high-efficiency video codec

Product Usage Instructions

Bracket Installation

Please follow the steps below to install the device:

1. Attach the mounting brackets to the panels of both sides using the screws provided in the package (two screws on each side).
2. Install the brackets onto the desired position using screws (not included).

Application: Matrix/Video Wall

To configure matrix and video wall using the VDirector App, follow these steps:

1. Scan the QR code on the right or visit the Apple App Store to search, download, and install the VDirector App on your iPad. (For Android version, visit Google Play Store; For Windows version, visit www.avaccess.com)
2. Connect all encoders, decoders, and the wireless router to the network switch according to the provided diagram.
3. Properly configure the wireless router and connect your iPad to the Wi-Fi network.
4. Launch VDirector on your iPad. It will start searching for online devices, and the main screen will appear.

Introduction

Overview

This product is a four-in-one 4K IP encoder that includes 4 HDMI inputs with resolutions supported up to 3840x2160p@30Hz. It provides flexible control options of front panel buttons and VDirector App (IOS/Android/Windows version). It is ideal for applications in sports bars, conference rooms, shopping malls, digital signage, etc., especially for places with limited installation and deployment space.

Features


- Includes four HDMI inputs.
- Works easily with an Ethernet switch, no configuration is required.
- Provides selection buttons to link the 4KIP200D decoder to the encoder.
- Provide Display Control buttons to transmit displays on/off commands to the decoders.
- Plug and play.
- Supports visual control through a tablet/cellphone/PC.
- Supports high-efficiency video codec.

Package Contents

Before you start the installation of the product, please check the package contents:

- Encoder x 1
- Power Adapter (DC12V 3A) x 1
- Mounting Brackets x 4
- Screws (M2.5*L5) x 4
- User Manual x 1

Panel

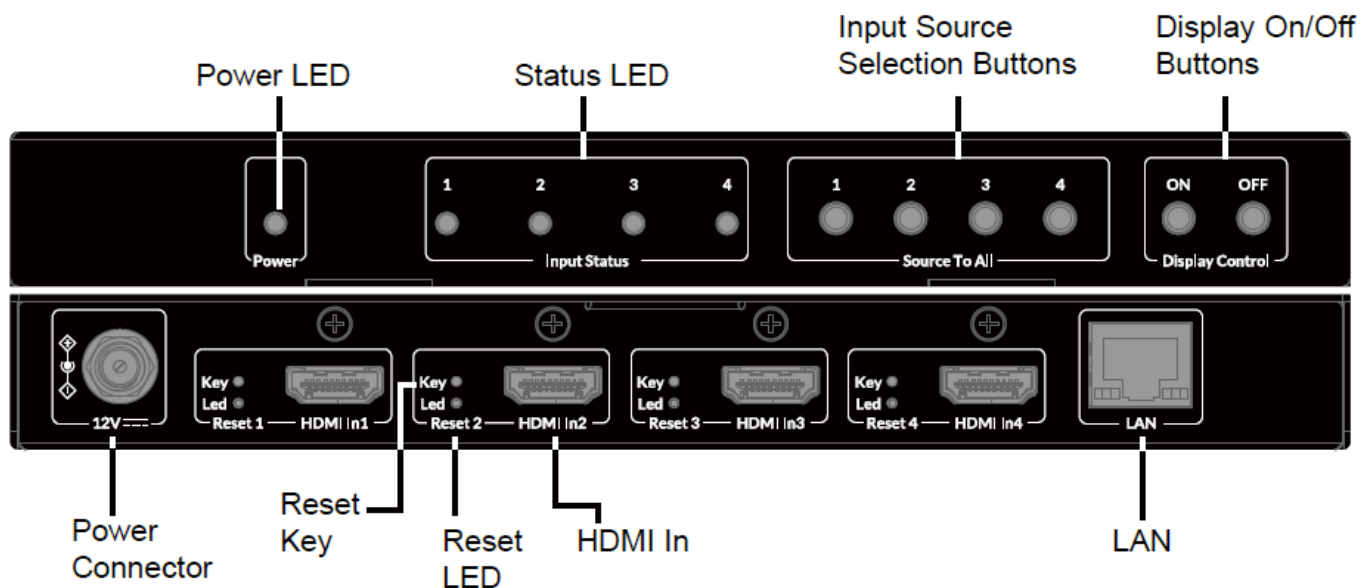


Installation and Application

Note: Disconnect all devices from power before installation.

Bracket Installation

Steps to install the device in a suitable location:

1. Attach the mounting brackets to the panels of both sides using the screws (two on each side) provided in the package.

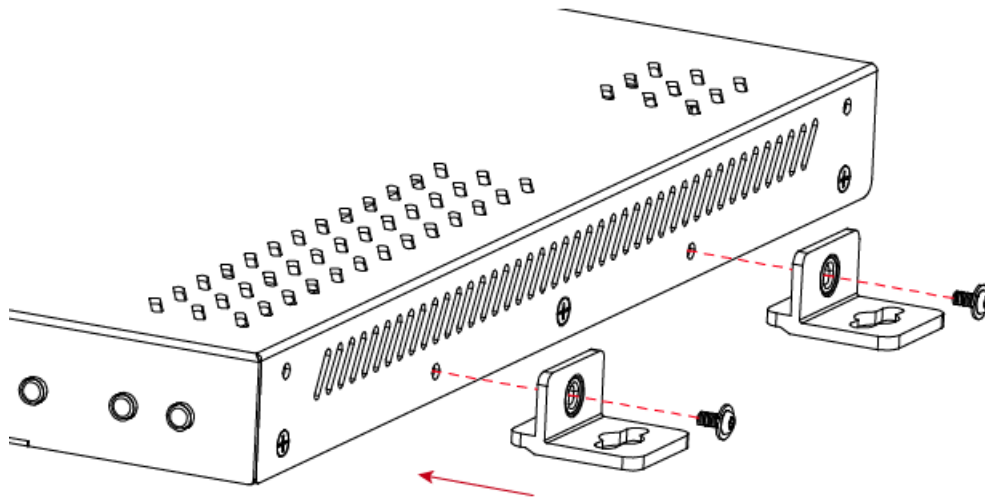

2. Install the brackets onto the position as desired using the screws (not included).

Application


Matrix/Video Wall

Take IOS version for example, to configure matrix and video wall, perform the following:


1. Scan the QR code on the right or visit Apple App Store to search, download and install VDirector App with your iPad.



- (**Note:** to get Android version, please visit Google Play Store; to get Windows version, please visit www.avaccess.com)
2. Connect all encoders, decoders and the wireless router to the network switch according to the following diagram shown:

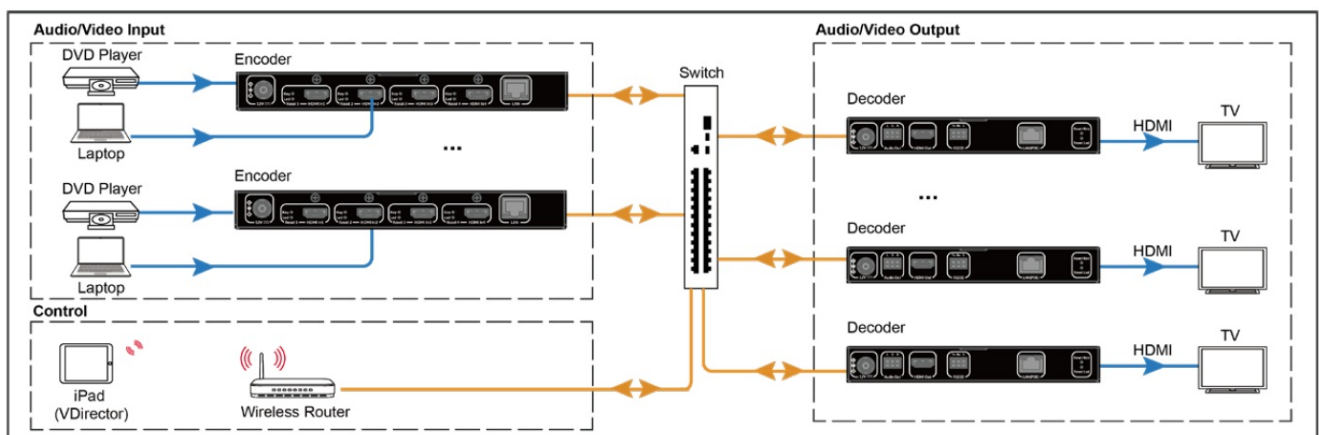

3. Configure the wireless router properly, and then connect your iPad to the Wi-Fi network. Launch VDirector on iPad, it will start searching for online devices, and the following main screen will appear:

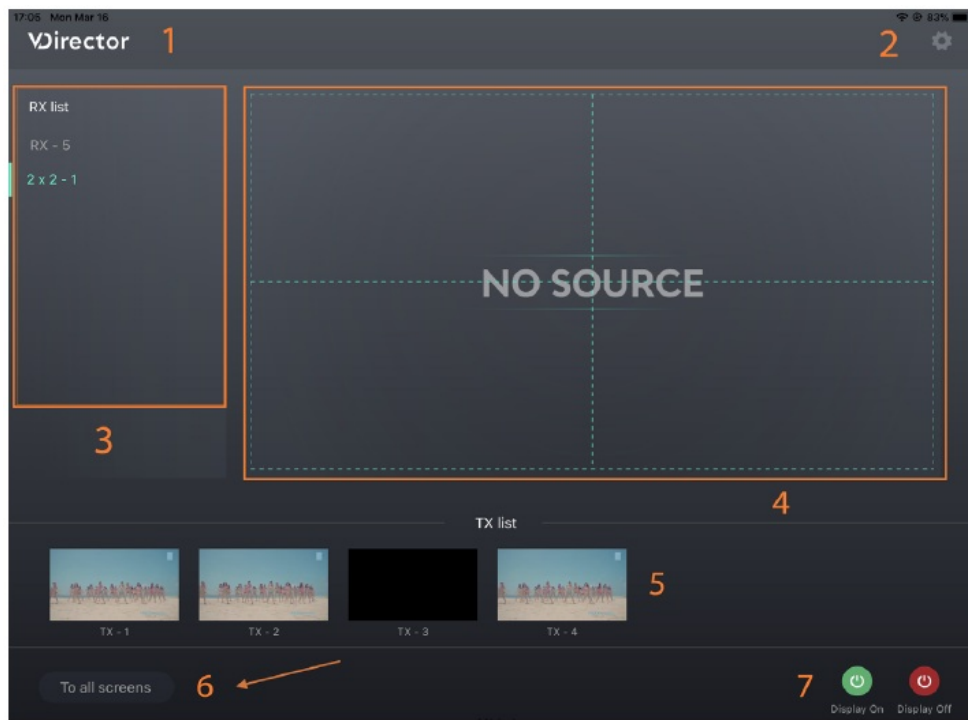

No.	Name	Description
1	Logo	This logo can be changed to a new one.
2	System Configuration Button	Click this button to enter system configuration page for the functions: 1) Naming and Sequencing; 2) Video Wall Settings; 3) Advanced Settings; 4) System Information.
3	RX List	Shows the list of online RX devices, including single device and devices for video walls.
4	RX Preview	Shows the live preview of current RX assignments.
5	TX List	Shows the IP stream's live preview from TX device.
6	To All Screens	Drag a TX from TX list over this button means the switching of this TX to all RX devices in RX list, including video walls.
7	Display On/Off	Display On: Turn on all RXs' displays. Display Off: Set all RXs' displays to standby state.

Specifications

Video	
Input Port	4 x HDMI
Input Resolutions	up to 3840x2160p@30Hz
Output Port	1 x LAN
Output Resolutions	up to 3840x2160p@30Hz

Audio	
Input Port	4 x HDMI
Output Port	1 x LAN
Audio Format	MPEG4-AAC Stereo

Control	
Control Method	Front Panel Buttons, VDirector App (IOS/Android/Windows Version)

General	
Operating Temperature	32°F ~ 113°F (0°C ~ 45°C), 10% ~ 90%, non-condensing
Storage Temperature	-4°F ~ 158°F (-20°C ~ 70°C), 10% ~ 90%, non-condensing
Power Supply	DC12V 3A
Power Consumption	14W (Max)
ESD Protection	Human body model:

	±8kV (air-gap discharge)/±4kV (contact discharge)
Dimensions (W x H x D)	215mm x 25mm x 260.2mm/ 8.46" x 0.98" x 10.24"
Net Weight	1.40kg/3.08lbs

Warranty

Products are backed by a limited 1-year parts and labor warranty. For the following cases AV Access shall charge for the service(s) claimed for the product if the product is still remediable and the warranty card becomes unenforceable or inapplicable.


1. The original serial number (specified by AV Access) labeled on the product has been removed, erased, replaced, defaced or is illegible.
2. The warranty has expired.

3. The defects are caused by the fact that the product is repaired, dismantled or altered by anyone that is not from an AV Access authorized service partner. The defects are caused by the fact that the product is used or handled improperly, roughly or not as instructed in the applicable User Guide.
4. The defects are caused by any force majeure including but not limited to accidents, fire, earthquake, lightning, tsunami and war.
5. The service, configuration and gifts promised by salesman only but not covered by normal contract.
6. AV Access preserves the right for interpretation of these cases above and to make changes to them at any time without notice.

Thank you for choosing products from AV Access. If you have any question, please contact us via the following emails:

- General Enquiry: info@avaccess.com
 - Customer/Technical Support: support@avaccess.com
 - www.avaccess.com
-

Documents / Resources

	<p>AV Access 4KIP204E 4K IP Encoder with 4 HDMI Inputs [pdf] User Manual 4KIP204E, 4KIP204E 4K IP Encoder with 4 HDMI Inputs, 4K IP Encoder with 4 HDMI Inputs, Encoder with 4 HDMI Inputs, 4 HDMI Inputs</p>
---	---

References

-  [AV Access | Quality & Budget Assured Pro AV Product Manufacturer](#)
- [User Manual](#)