







## B C SPEAKERS WGX1090TN Line Array Sources Instructions

[Home](#) » [B C SPEAKERS](#) » B C SPEAKERS WGX1090TN Line Array Sources Instructions 



WGX1090TN Line Array Sources  
Instructions Manual



## Contents



- [1 WGX1090TN Line Array Sources](#)
- [2 SPECIFICATIONS](#)
- [3 Documents / Resources](#)
- [4 Related Posts](#)

## WGX1090TN Line Array Sources

- Line Array optimized Waveguide with DE1090TN driver
- 120° max horizontal coverage
- 240 W continuous program power capacity
- 100 mm (4 in) aluminum voice coil
- Titanium diaphragm
- 500 – 18000 Hz response
- 108 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

Waveguide horn are not sold separately

## Line Array Sources- 1.4 Inches

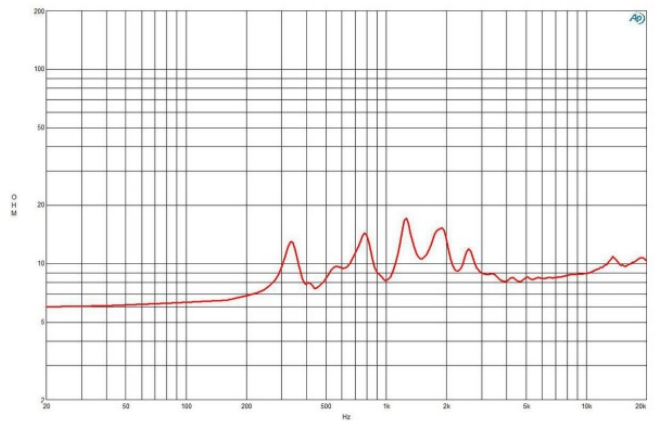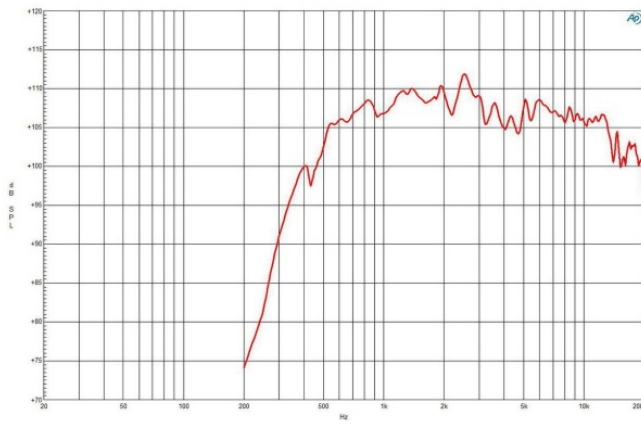

## SPECIFICATIONS

Horizontal Coverage	120 ° Max
Active Radiating Factor	93.70%
Recommended Crossover <sup>1</sup>	0.8 kHz
Waveguide Material	Cast Aluminium
Nominal Impedance	8 Ω
Minimum Impedance	8.0 Ω
Nominal Power Handling <sup>2</sup>	120 W
Continuous Power Handling <sup>3</sup>	240 W
Sensitivity <sup>4</sup>	108.0 dB
Frequency Range <sup>5</sup>	0.5 – 18.0 kHz
Voice Coil Diameter	100 mm (4.0 in)
Winding Material	Aluminum
Diaphragm Material	Titanium
Flux Density	1.9 T
Magnet Material	Neo Inside Ring

## MOUNTING AND SHIPPING INFO

Exit Size	153×25 mm (6×1 in)
Driver Diameter	127 mm (5.0 in)
Dimensions	163x130x234 mm (6.42×5.12×9.21 in)
Net Weight	2.9 kg (6.39 lb)
Shipping Units	1
Shipping Weight	3.0 kg (6.61 lb)
Shipping Box	245x140x175 mm (9.6×5.5×6.9 in)

1. 12 dB/Oct. Or higher slope high-pass filter.
2. 2-hour test made with a continuous pink noise signal (6 dB crest factor) within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.
3. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
4. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
5. Waveguide mounted on 90°x10° bell horn



**B&C Speakers s.p.a.**

Via Poggiomoro, 1 – Loc. Vallina,  
50012 Bagno a Ripoli (FI) – ITALY

Tel. +39 055 65721

Fax +39 055 6572312

[mail@bcspeakers.com](mailto:mail@bcspeakers.com)

## Documents / Resources



[B C SPEAKERS WGX1090TN Line Array Sources](#) [pdf] Instructions  
WGX1090TN Line Array Sources, WGX1090TN, Line Array Sources, Array Sources