



behringer TRUTH B1031A High-Resolution Active 2-Way Reference Studio Monitor User Guide

[Home](#) » [Behringer](#) » behringer TRUTH B1031A High-Resolution Active 2-Way Reference Studio Monitor User Guide 

behringer TRUTH B1031A High-Resolution Active 2-Way Reference Studio Monitor User Guide





Contents


- [1 Important Safety Instructions](#)
- [2 TRUTH B1031A Hook-up](#)
- [3 TRUTH B1031A Controls](#)
- [4 TRUTH B1031A Getting started](#)
- [5 Specifications](#)
- [6 Other important information](#)
- [7 LEGAL DISCLAIMER](#)
- [8 LIMITED WARRANTY](#)
- [9 FEDERAL COMMUNICATIONS COMMISSION COMPLIANCE INFORMATION](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)

Important Safety Instructions

 **Caution:** Risk of Electric Shock!: Do not Open 

 Terminals marked with this symbol carry electrical current of sufficient magnitude to constitute risk of electric shock. Use only high-quality professional speaker cables with 1/4" TS or twist-locking plugs pre-installed. All other installation or modification should be performed only by qualified personnel.

 This symbol, wherever it appears, alerts you to the presence of uninsulated dangerous voltage inside the enclosure – voltage that may be sufficient to constitute a risk of shock.

 This symbol, wherever it appears, alerts you to important operating and maintenance instructions in the accompanying literature. Please read the manual.

Caution

To reduce the risk of electric shock, do not remove the top cover (or the rear section). No user serviceable parts inside. Refer servicing to qualified personnel.

Caution

To reduce the risk of fire or electric shock, do not expose this appliance to rain and moisture. The apparatus shall not be exposed to dripping or splashing liquids and no objects filled with liquids, such as vases, shall be placed on the apparatus.


Caution

These service instructions are for use by qualified service personnel only. To reduce the risk of electric shock do not perform any servicing other than that contained in the operation instructions. Repairs have to be performed by qualified service personnel.

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.

6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Use only attachments/accessories specified by the manufacturer.




2. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
13. Unplug this apparatus during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. The apparatus shall be connected to a MAINS socket outlet with a protective earthing connection.
16. Where the MAINS plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.
-  7. Correct disposal of this product: This symbol indicates that this product must not be disposed of with household waste, according to the WEEE Directive (2012/19/EU) and your national law. This product should be taken to a collection center licensed for the recycling of waste electrical and electronic equipment (EEE). The mishandling of this type of waste could have a possible negative impact on the environment and human health due to potentially hazardous substances that are generally associated with EEE. At the same time, your cooperation in the correct disposal of this product will contribute to the efficient use of natural resources. For more information about where you can take your waste equipment for recycling, please contact your local city office, or your household waste collection service.
18. Do not install in a confined space, such as a book case or similar unit.
19. Do not place naked flame sources, such as lighted candles, on the apparatus.
20. Please keep the environmental aspects of battery disposal in mind. Batteries must be disposed-of at a battery collection point.
21. This apparatus may be used in tropical and moderate climates up to 45°C.


TRUTH B1031A Hook-up

Step 1: Hook-Up

- Computer Monitoring

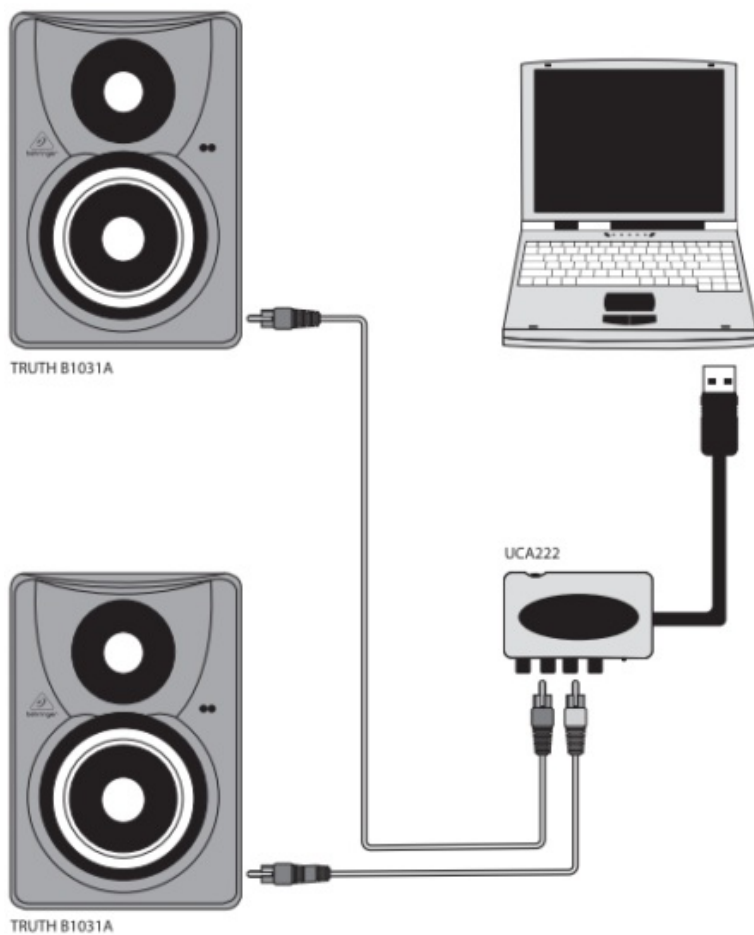


- Project Studio

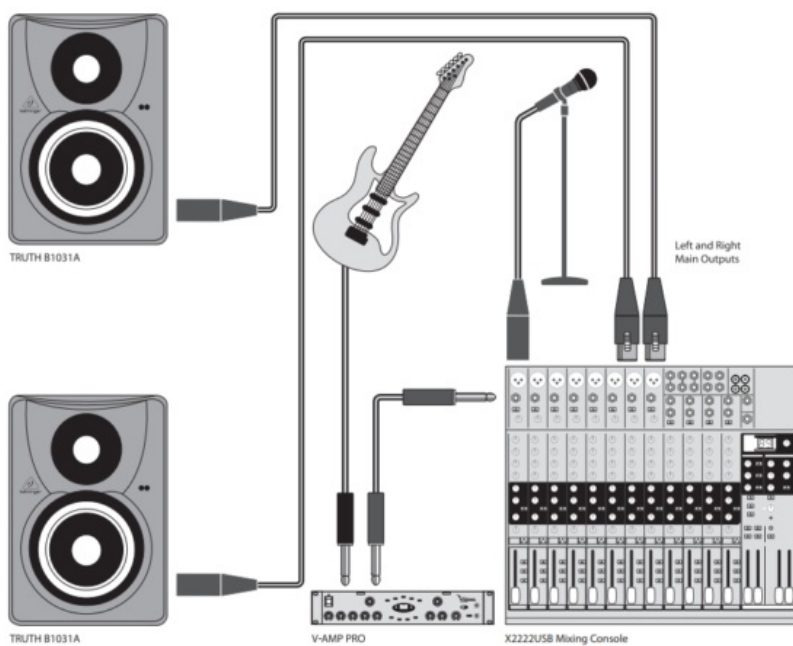

TRUTH B1031A Controls

Step 2: Controls

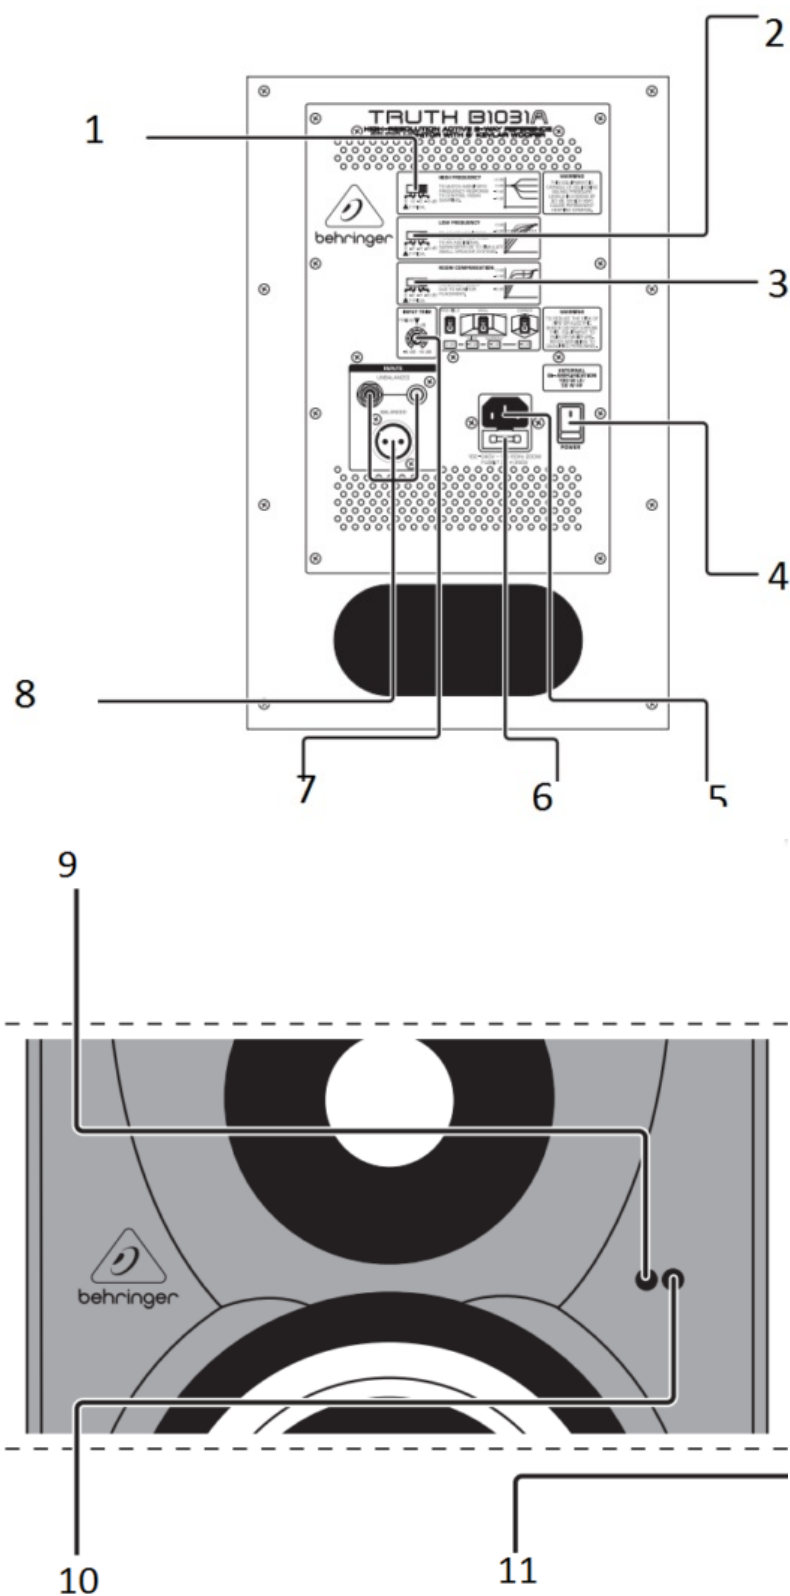


1. **HIGH FREQUENCY** — Adapts the monitor's frequency response to the damping characteristics of the control room.
2. **LOW FREQUENCY** — Adapts the speaker for use with a subwoofer system or emulates the characteristics of a smaller speaker.
3. **ROOM COMPENSATION** — Provides a low frequency roll-off to compensate for speaker placement.
4. **POWER SWITCH** — Turns the monitor on and off. The ON LED lights when the power is turned on.
5. **POWER SOURCE** — Connect the included power cable to this socket and to a mains outlet.
6. **FUSE** — Contains the fuse.
7. **INPUT TRIM** — Adjusts the monitor's input sensitivity to the audio source signal.


8. **INPUT** — Plug either an XLR, RCA or 1/4" cable into one of these inputs to connect the audio source.
9. **ON LED** — Lights when power is connected to the monitor and the POWER switch is turned on.
10. **LIMIT LED** — Lights when one of the monitor protection circuits engages.
11. **INPUT** — Plug either an XLR, RCA or 1/4" cable into one of these inputs to connect the audio source.

TRUTH B1031A Getting started


1. Place the monitor speakers at head level, unobstructed and at equal distances to the left and right of your listening position.

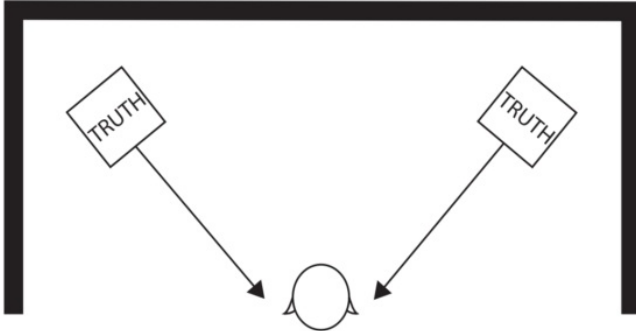


2. Connect the included power cables to each monitor speaker. Connect the other end to a mains outlet properly configured for your particular model. DO NOT turn the power on yet! If possible, connect both monitor speakers and the mixing console to the same outlet to avoid ground loops.

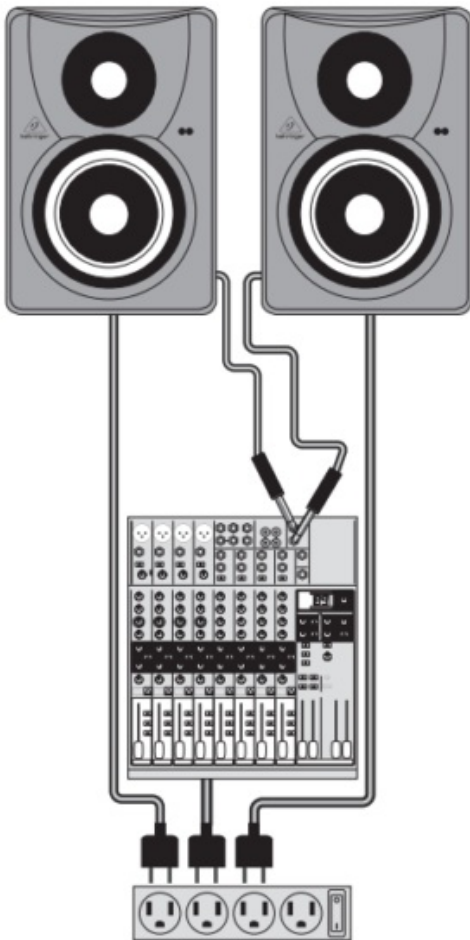


3. Connect the audio source to the inputs of the monitor speakers. If connecting to a mixer, the main XLR outputs from the mixer are preferable. You may also connect the audio outputs from a computer using an interface such as the UCA222.

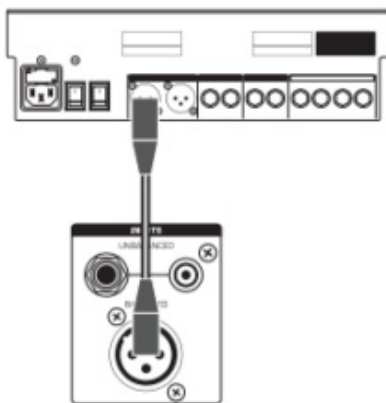

4. Turn on your mixer, computer, or other audio source.
5. Turn on the power to each speaker by flipping the power switch. This is located on the back panel. The ON LED will light up.

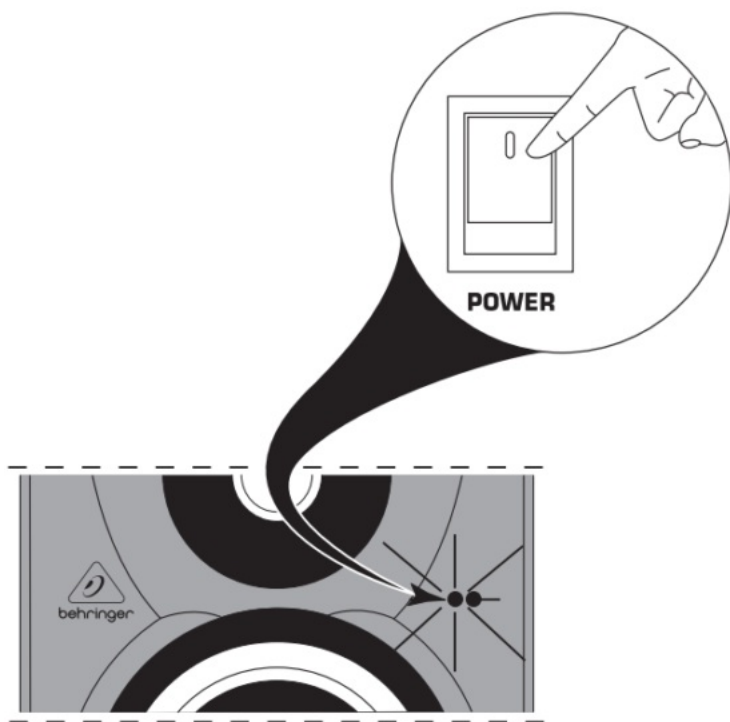

6. Adjust the INPUT TRIM knob on the back of each monitor to the center (0 dB) position.

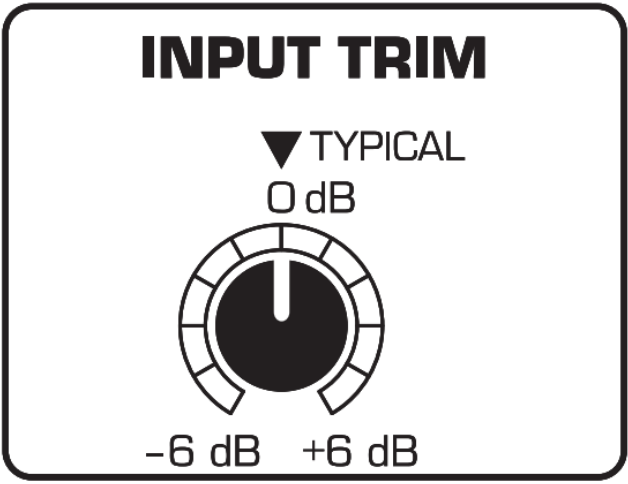

7. Start playing your audio source and slowly increase the volume until you reach a comfortable listening level.

Specifications

Audio Inputs	
XLR connector	balanced input
I/CTRS	balanced input
RCA	unbalanced input
Input impedance	10 kΩ
Input Trim	-6 dB to +6 dB
Max. input level	+20 dBu
Transducer	
High-frequency driver	Ultra-high resolution r dome tweeter

Low-frequency driver	8" woofer
Amplifier Output Power	
Low-frequency driver	
RMS @ 0.1 % THD (sine wave)	70 W @ 4 Ω
Peak power	100 W @ 4 Ω
High-frequency driver	
RMS @ 0.1 % THD (sine wave)	33 W @ 4 Ω
Peak power	50 W @ 4 Ω
Crossover	
Type	Active
Crossover frequency	2.5 kHz
System Specification	
Frequency Response	(-3 dB 35 Hz to 20 Hz)
Sound pressure level	max. 113 dB SPL @ 1 m (pair)
Frequency Band Allocation	

Low frequency	0 dB @ 60 Hz -2 dB @ 60 Hz -4 dB @ 60 Hz -6 dB @ 60 Hz
Room compensation	0 dB @ 300 Hz -2 dB @ 300 Hz -4 dB @ 300 Hz -6 dB @ 300 Hz
High Frequency	+2 dB @ 8 kHz 0 dB @ 8 kHz -2 dB @ 8 kHz -4 dB @ 8 kHz
Power Supply	
Fuse	100 – 240 V~, 50/60 Hz (T 2 A H 250 V)
Power consumption	200 W
Mains connection	Standard IEC connector
Dimensions	
Dimensions (H x W x D)	15.5 x 10.3 x 13.6" 393 x 261 x 345 mm
Weight	25 lbs / 11.3 kg

Other important information

1. **Register online.** Please register your new MusicTribe equipment right after you purchase it by visiting musictribe.com. Registering your purchase using our simple online form helps us to process your repair claims more quickly and efficiently. Also, read the terms and conditions of our warranty, if applicable.
2. **Malfunction.** Should your MusicTribe Authorized Reseller not be located in your vicinity, you may contact the MusicTribe Authorized Fulfiller for your country listed under "Support" at musictribe.com. Should your country not be listed, please check if your problem can be dealt with by our "Online Support" which may also be found under "Support" at musictribe.com. Alternatively, please submit an online warranty claim at musictribe.com BEFORE returning the product.
3. **Power Connections.** Before plugging the unit into a power socket, please make sure you are using the correct mains voltage for your particular model. Faulty fuses must be replaced with fuses of the same type and rating

without exception.

LEGAL DISCLAIMER

Music Tribe accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. Midas, Klark Teknik, Lab Gruppen, Lake, Tannoy, Turbosound, TC Electronic, TC Helicon, Behringer, Bugera, Oberheim, Auratone, Aston Microphones and Coolaudio are trademarks or registered trademarks of Music Tribe Global Brands Ltd. © Music Tribe Global Brands Ltd. 2021 All rights reserved.

LIMITED WARRANTY

For the applicable warranty terms and conditions and additional information regarding Music Tribe's Limited Warranty, please see complete details online at musictribe.com/warranty.

FEDERAL COMMUNICATIONS COMMISSION COMPLIANCE INFORMATION

Responsible Party Name: Music Tribe Commercial NV Inc.
Address: 5270 Procyon Street,
Las Vegas NV 89118,
United States
Phone Number: +1 702 800 8290
TRUTH B1031A

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

1. this device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause undesired operation.

Important information:


Changes or modifications to the equipment not expressly approved by Music Tribe can void the user's authority to use the equipment.





Hereby, Music Tribe declares that this product is in compliance with Directive 2014/35/EU, Directive 2014/30/EU, Directive 2011/65/EU and Amendment 2015/863/ EU, Directive 2012/19/EU, Regulation 519/2012 REACH SVHC and Directive 1907/2006/EC.

Full text of EU DoC is available at <https://community.musictribe.com/>
EU Representative: Music Tribe Brands DK A/S
Address: Ib Spang Olsens Gade 17, DK – 8200 Aarhus N, Denmark

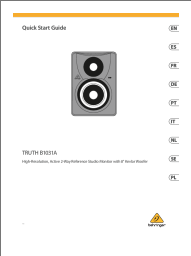Documents / Resources

	behringer TRUTH B1031A High-Resolution Active 2-Way Reference Studio Monitor [pdf] User Guide TRUTH B1031A, High-Resolution Active 2-Way Reference Studio Monitor
---	---

References

-  [Music Tribe](#)
-  [Music Tribe](#)