




BITMAIN AntMiner S21 Pro Bitcoin Miner Owner's Manual

[Home](#) » [BITMAIN](#) » BITMAIN AntMiner S21 Pro Bitcoin Miner Owner's Manual 

BITMAIN AntMiner S21 Pro Bitcoin Miner



Contents

- [1 Specification](#)
- [2 Performance Curves](#)
- [3 Customer Support](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)

Specification

Product Glance	Value		
Model	S21 Pro		
Sub	245T	234T	220T
Version	10		
Crypto algorithm/coins	SHA256 BTC/BCH/BSV		
Typical Hashrate, TH/s(1-1)	245	234	220
Power on wall @25°C(1-2), Watt(1-1)	3675	3510	3300
Power efficiency on wall @25°C(1-2), J/TH(1-1)	15		

Detailed Characteristics	Value
Power supply	
Phase	1
Input voltage(2-1), Volt	220~277
Input frequency range, Hz	50~60
Maximum input current, Amp	20
Hardware Configuration	
Network connection mode	RJ45 Ethernet 10/100M
Server size (Length*Width*Height, w/o package), mm	450*219*293
Server size (Length*Width*Height, with package), mm	630*350*430
Net weight, kg	18.5
Gross weight, kg	21.5
Noise(2-2) @30°C, dBA	76
Environment Requirements	
Operation temperature, °C	-20~45
Storage temperature, °C	-20~70
Operation humidity(no condensation), RH	10%~90%
Operation altitude(2-3), m	≤2000

Notes:

(1-1) The Hashrate value, Power on wall, and Power efficiency on wall are all typical values, The actual Hashrate value fluctuates by $\pm 3\%$, and the actual Power on wall and Power efficiency on wall fluctuate by $\pm 5\%$.

(1-2) Inlet air temperature.




(2-1) Caution: Wrong input voltage may probably cause server damaged.

(2-2) The noise is loudest when the fan is under maximum RPM(rotation per minute).


(2-3) When the server is used at an altitude from 900m to 2000m, the highest operating temperature decreases by 1°C for every increase of 300m.

Performance Curves

1. Hashrate vs. Ambient Temperature

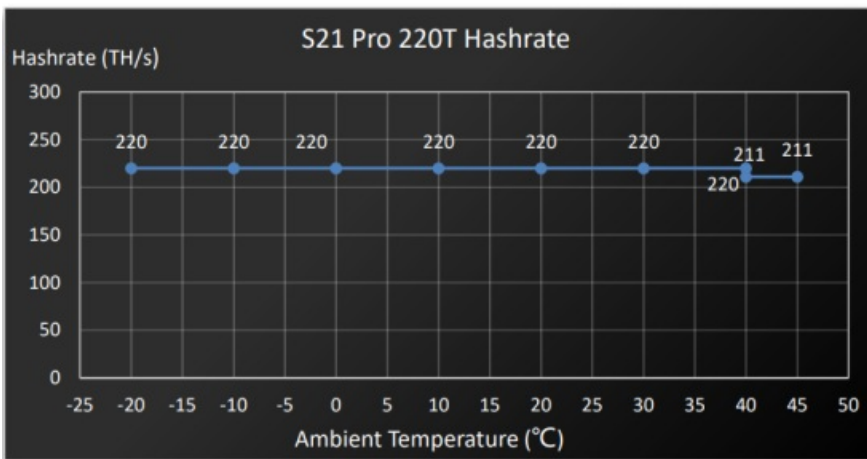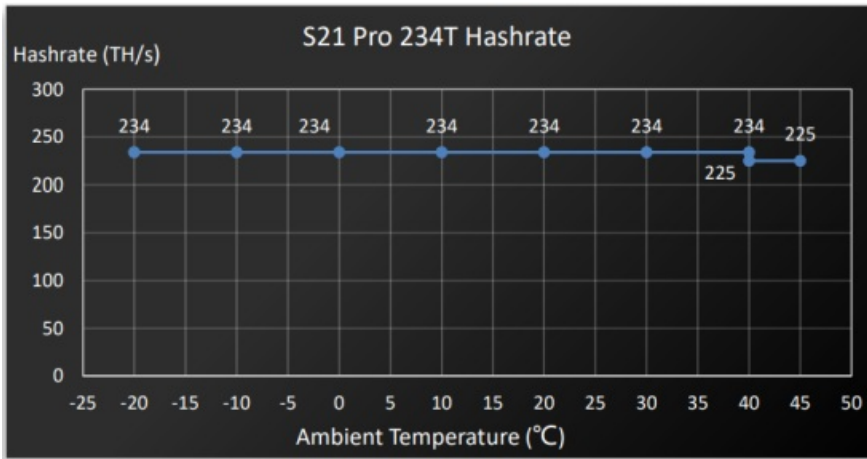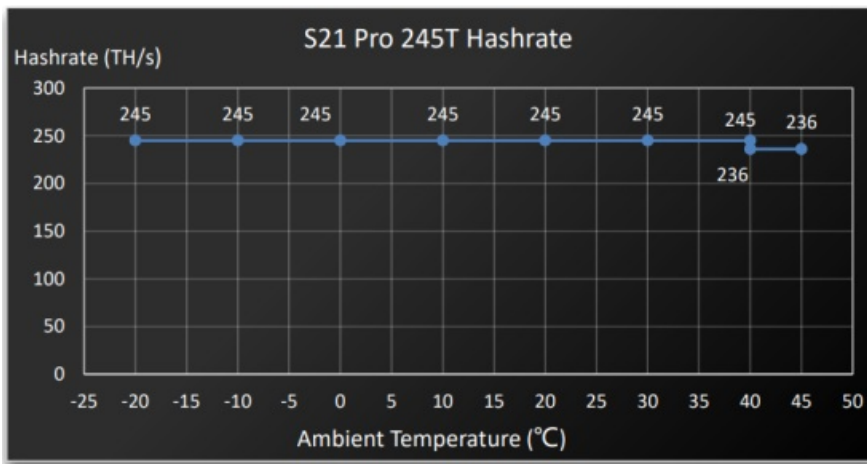

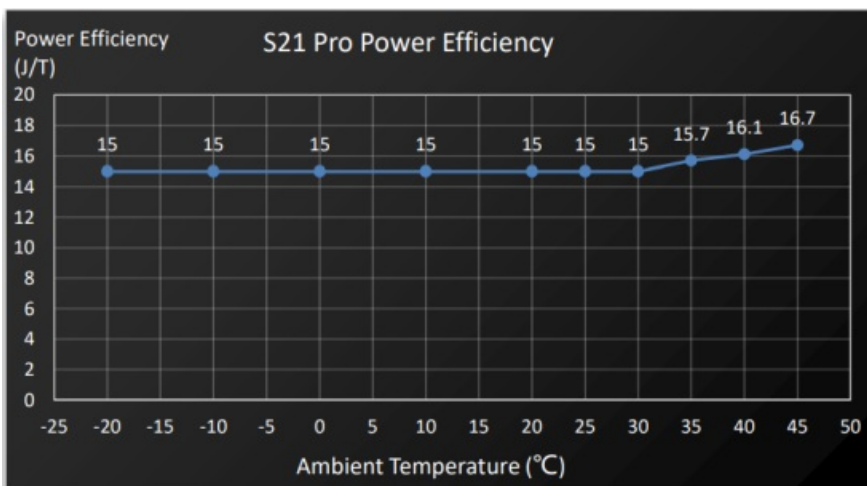

2. J/T vs. Ambient Temperature





Documents / Resources

 S21 Pro Product Manual 	BITMAIN AntMiner S21 Pro Bitcoin Miner [pdf] Owner's Manual AntMiner S21 Pro, AntMiner S21 Pro Bitcoin Miner, Bitcoin Miner, Miner
--	---

References

-  [BITMAIN](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.