



BITMAIN ANTMINER X5 Server With Power Supply Instructions

[Home](#) » [BITMAIN](#) » BITMAIN ANTMINER X5 Server With Power Supply Instructions 



Contents

- [1 Specification](#)
- [2 Performance Curves](#)
- [3 Documents / Resources](#)
 - [3.1 References](#)
- [4 Related Posts](#)

Specification

Product Glance	Value
Model	X5
Version	240-X
Crypto algorithm Coins	RandomX XMR
Typical Hashrate, KH/s (1-1)	212
Power on wall @25°C, Watt (1-1)	1350
Power efficiency on wall@25°C, J/Ksol (1-1)	6.37

Detailed Characteristics	Value
Power supply	
Power supply AC input voltage range, V (2-1)	200-240V AC
Power supply AC Input Frequency Range, Hz	50-60
Power supply AC Input current, A (2-2)	20
Adapted AC output power requirement, W (2-3)	4000
Hardware configuration	
Quantity of hash chips	18
Quantity of hash boards	3
Network connection mode	RJ45 Ethernet 10/100M
Server size (Length*Width*Height, w/o package), mm	480*195*290
Server size (Length*Width*Height, with package), mm	597*317*427
Net weight, kg	14.88
Gross weight, kg	16.92
Noise, dBA @25°C (2-4)	75
Environment requirements	
Operation temperature, °C	0~40
Storage temperature, °C	-20~70
Operation humidity(non-condensing), RH	10~90%
Operation altitude, m (2-5)	≤2000

Notes:

(1-1) The Hashrate value, Power on wall, and Power efficiency on wall are all typical values.

The actual Hashrate value fluctuates by ±3%, and the actual Power on wall and Power efficiency on wall fluctuate by ±5%.


(2-1) Caution: Wrong input voltage may cause server damaged.

(2-2) Two AC input, 10 A per wire.


- (2-3) Caution: It is strongly recommended that the power on wall of the miner does not exceed this value.
- (2-4) Max condition: Fan is under max RPM(rotation per minute).
- (2-5) When the miner is used at an altitude from 900m to 2000m, the highest operating temperature decreases by 1°C for every increase of 300m.

Performance Curves


1. Hashrate Vs. Ambient Temperature

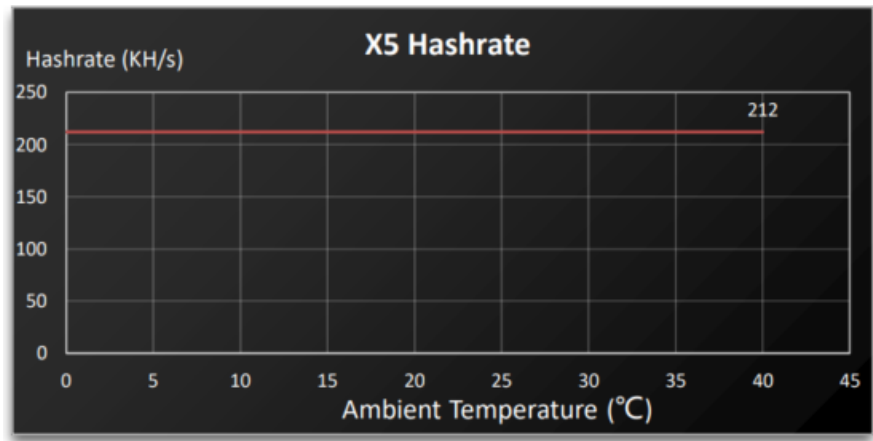

2. J/KH Vs. Ambient Temperature

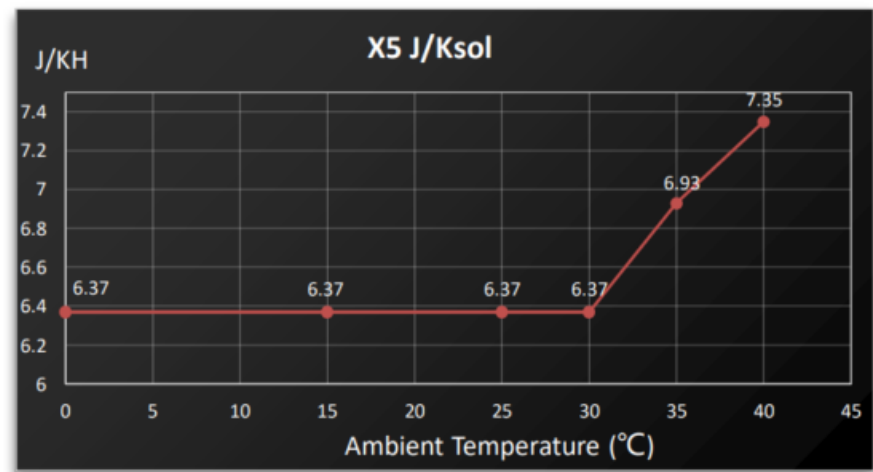

Documents / Resources

	BITMAIN ANTMINER X5 Server With Power Supply [pdf] Instructions ANTMINER X5 Server With Power Supply, ANTMINER X5, Server With Power Supply, With Po wer Supply, Power Supply, Supply
---	---

References

- [BITMAIN](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.