



BITMAIN S21 Hyd 335T BTC Miner Bitmars Instruction Manual

[Home](#) » [BITMAIN](#) » BITMAIN S21 Hyd 335T BTC Miner Bitmars Instruction Manual 

BITMAIN S21 Hyd 335T BTC Miner Bitmars Instruction Manual



Contents

- [1 Specification](#)
- [2 Performance Curve](#)
- [3 Documents / Resources](#)
 - [3.1 References](#)
- [4 Related Posts](#)

Specification

Product Glance	Value		
Model	S21 Hyd.		
Version	m0-10		
Crypto algorithm/coins	SHA256 BTC/BCH/BSV		
Typical Hashrate, TH/s (1-1)	335	319	302
Power on wall @35°C(1-2), Watt (1-1)	5360	5104	4832
Power efficiency on wall@35°C(1-2), J/TH (1-1)	16.0		

Detailed Characteristics	Value
Power supply	
Phase	3
Input voltage, Volt (2-1)	380~415
Input frequency range, Hz	50~60
Input max current, Amp	12
Hardware configuration	
Network connection mode	RJ45 Ethernet 10/100M
Server size (Length*Width*Height, w/o package), mm	339*173*207
Server size (Length*Width*Height, with package), mm	570*316*430
Net weight, kg	12.3
Gross weight, kg	13.6
Environment requirements	
Inlet coolant temperature, °C	20~50
Coolant flow, L/min	8.0~10.0
Coolant pressure, bar	≤3.5
Working coolant(2-2)	Antifreeze/ Pure water/Deionized water
Coolant pH value	Antifreeze: 7.0~9.0 Pure water: 6.5~7.5Deionized water 8.5~9.5
Diameter of coolant pipe connector, mm	OD10
Storage temperature, °C	-20~70
Operation humidity(non-condensing), RH	10~90%

Notes:

(1-1) The Hashrate value, power on wall, and power efficiency on wall are all typical values.

The actual Hashrate value fluctuates by ±3%, and the actual power on wall and power efficiency on wall fluctuate by ±5%.


(1-2) Inlet coolant temperature.

(2-1) Caution: Wrong input voltage may cause server damaged.


(2-2) For detailed working coolant use and maintenance instructions, please refer to “ANTSPACE HK3 Water Cooling Container & Dry-Wet Tower Product Manual”, Chapter 9, Article 3, Point 6, “Maintenance of Coolant”!

Performance Curve

1. Hashrate vs. Inlet Coolant Temperature

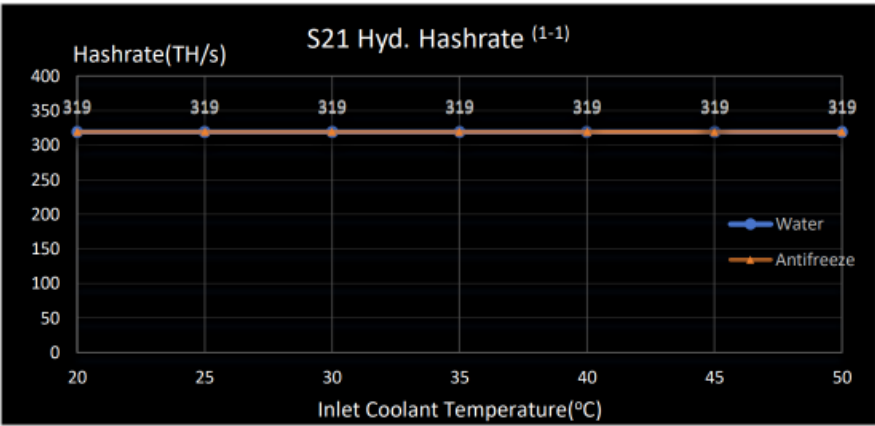

2. Power Efficiency vs. Inlet Coolant Temperature

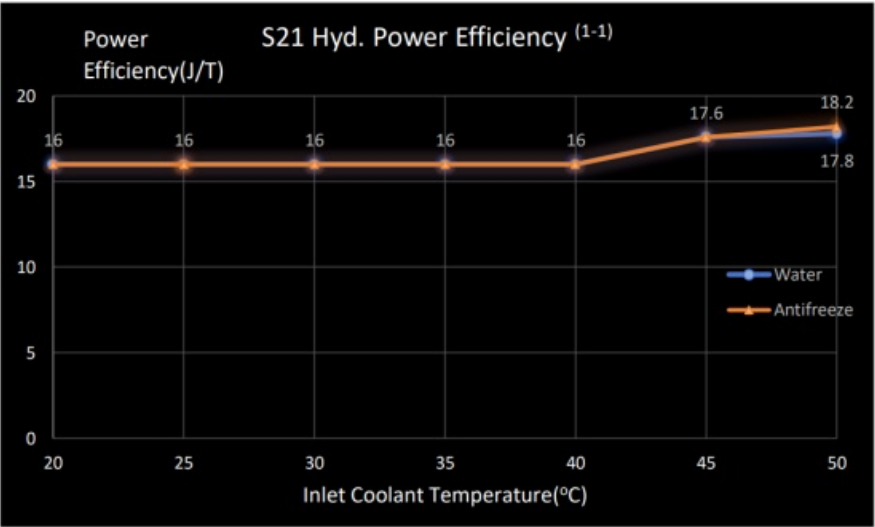



(1-1) The hashrate value, and power efficiency on wall are all typical values. The actual hashrate value fluctuates by ±3%, and the actual power efficiency on wall fluctuate by ±5%.

BITMAIN TECHNOLOGIES INC.

www.bitmain.com

BITMAIN

Documents / Resources

<div> S21 Hyd. Product Manual </div>	<div>BITMAIN S21 Hyd 335T BTC Miner Bitmars [pdf] Instruction Manual S21 Hyd 335T BTC Miner Bitmars, S21 Hyd, 335T BTC Miner Bitmars, Miner Bitmars, Bitmars</div>
--	--

References

-  [BITMAIN](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.