

BLNAN LD-GB-029WM Motion Sensor Ceiling Light Wired



BLNAN LD-GB-029WM Motion Sensor Ceiling Light Wired User Manual

[Home](#) » [BLNAN](#) » BLNAN LD-GB-029WM Motion Sensor Ceiling Light Wired User Manual 

Contents

- [1 BLNAN LD-GB-029WM Motion Sensor Ceiling Light Wired](#)
- [2 Introduction](#)
- [3 Product Specifications](#)
- [4 Precautions](#)
- [5 Package Contents](#)
- [6 Installation Steps](#)
- [7 DETECTION INTRODUCTION:](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)

BLNAN®

BLNAN LD-GB-029WM Motion Sensor Ceiling Light Wired



User Manual

LS-CL-GIBW-M-5



On/Off
Control



Daylight
Sensor



Detection
Area



3 Color
Temperatures



Hold Time

Introduction

Dear customer,

Thank you for purchasing our ceiling light. In order to use this product correctly, please read and keep this instruction for future reference.

If you have any questions, please contact the following

Email address: support@blnan.net

Product Introduction

This is an infrared motion sensor & light sensor ceiling light. There are 3 modes (Auto/ ON/ G), 3 color temperatures selectable (3000K/ 4000K/ 5000K), and optional time (30s/ 120s/ 180s). We are committed to bringing a convenient and comfortable experience to customers.

Product Specifications

Light Size	Φ220*25mm/ Φ8.66*0.98in
Wattage	18W
Voltage	AC120V 60Hz
Luminous Flux	1800LM
Color Temperature	3000K / 4000K / 5000K
LED Quantity	108PCS
LED Type	2835
CRI	90
Material	High-quality PC (fireproof)
Waterproof	IP40
Detection Angle	120°
Remote Control Frequency	Infrared
Life Span	30000H
Sensor	Motion sensing and light sensing
Sensor Mode	Auto/ ON/ G
Delay Time	30S/ 120S/ 180S

Precautions

Precautions Before Installation:

1. Power off before installation.
2. Do not exceed the rated voltage.
3. Do not install it on the surfaces where are not stable or deformed.
4. Do not install it on or above the surface with high temperature.
5. Please make sure that no gas, water or electricity pipes and wires can be drilled through or damaged in your chosen mounting location.

Precautions During Installation:

1. There must be no corrosive, explosive or flammable materials around the lamp.
2. User should connect the cable correctly, and the lamp should be installed by qualified electrician.
3. Please pay attention to connect the wires correctly, and make sure the cable connection comply with national regulations.




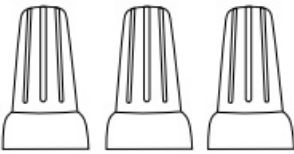

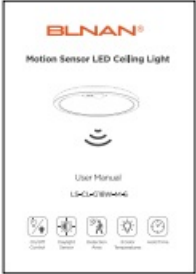
(Description of the supply terminals: Black: Live Wire, White=Neutral Wire, Green=Earth Wire.)

4. Please make sure that the lampshade is clear in case of low luminous efficiency.
5. Please make sure that illuminants are securely fixed during the installation.

Precautions About the Product:



1. It is not suitable for dimmer switches.
2. The LED light source inside the lamp body can not replaceable.
3. The lampshade cannot be opened.
4. Do not look straight into the light source (illuminant, LED, etc.).
5. Pets with larger body shape can trigger lights on.
6. During the installation, please avoid close to heating objects (electric heaters, heater, etc.).

Package Contents



 <p>Screws for expansion tube</p>	 <p>Expansion tubes</p>	 <p>Wire Rope</p>
 <p>Wiring caps</p>	 <p>Screws for mounting box</p>	 <p>Instruction for installation</p>

Installation Steps


1. Rotate and remove the base plate, fix the base plate to junction box with screws(provided)
2. Please use the correct size junction box. The screw hole distance of the junction box is: 2.75-3.54 inches.

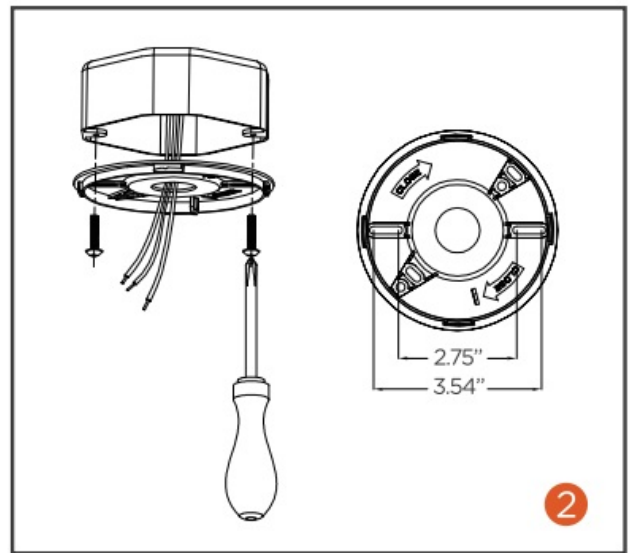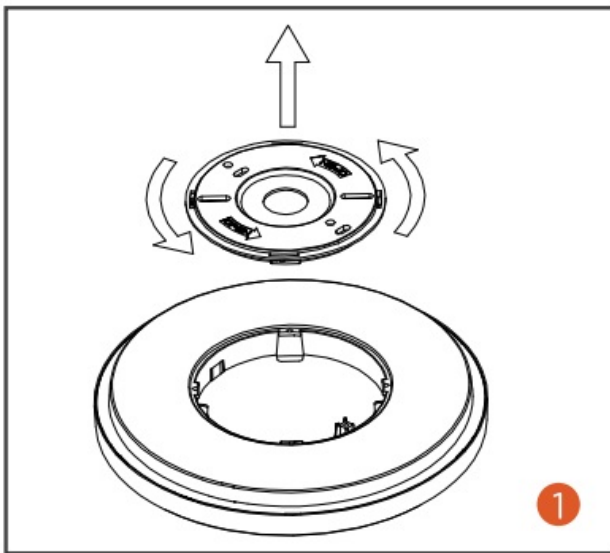

3. Connect power cord and plug the excess wire back into the junction box. (Description of the supply terminals:
Black: Live Wire, White: Neutral Wire, Green: Earth Wire.)
4. Push and rotate the lamp and install onto base plate.

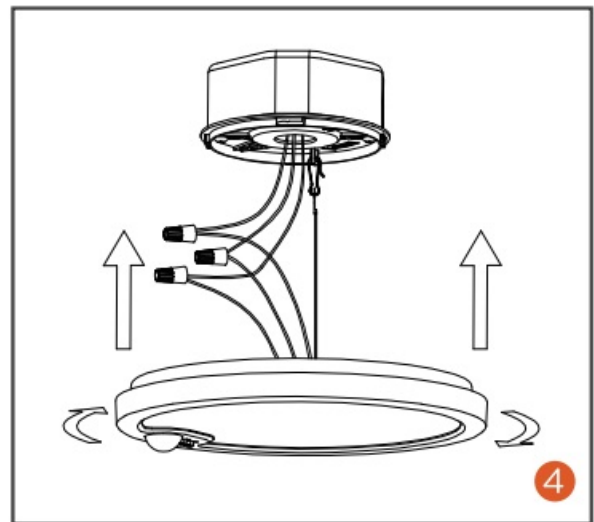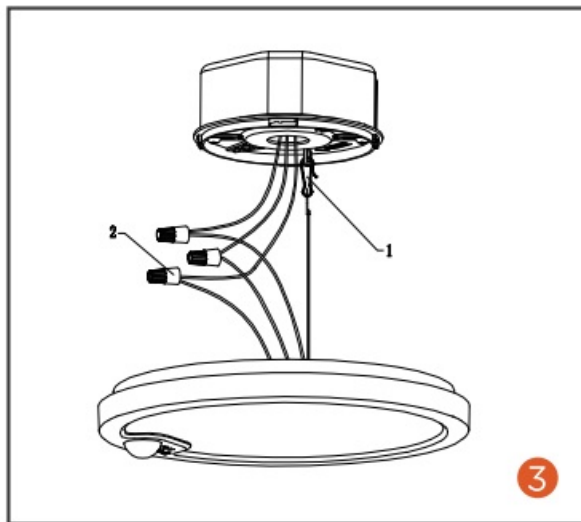


DETECTION INTRODUCTION:

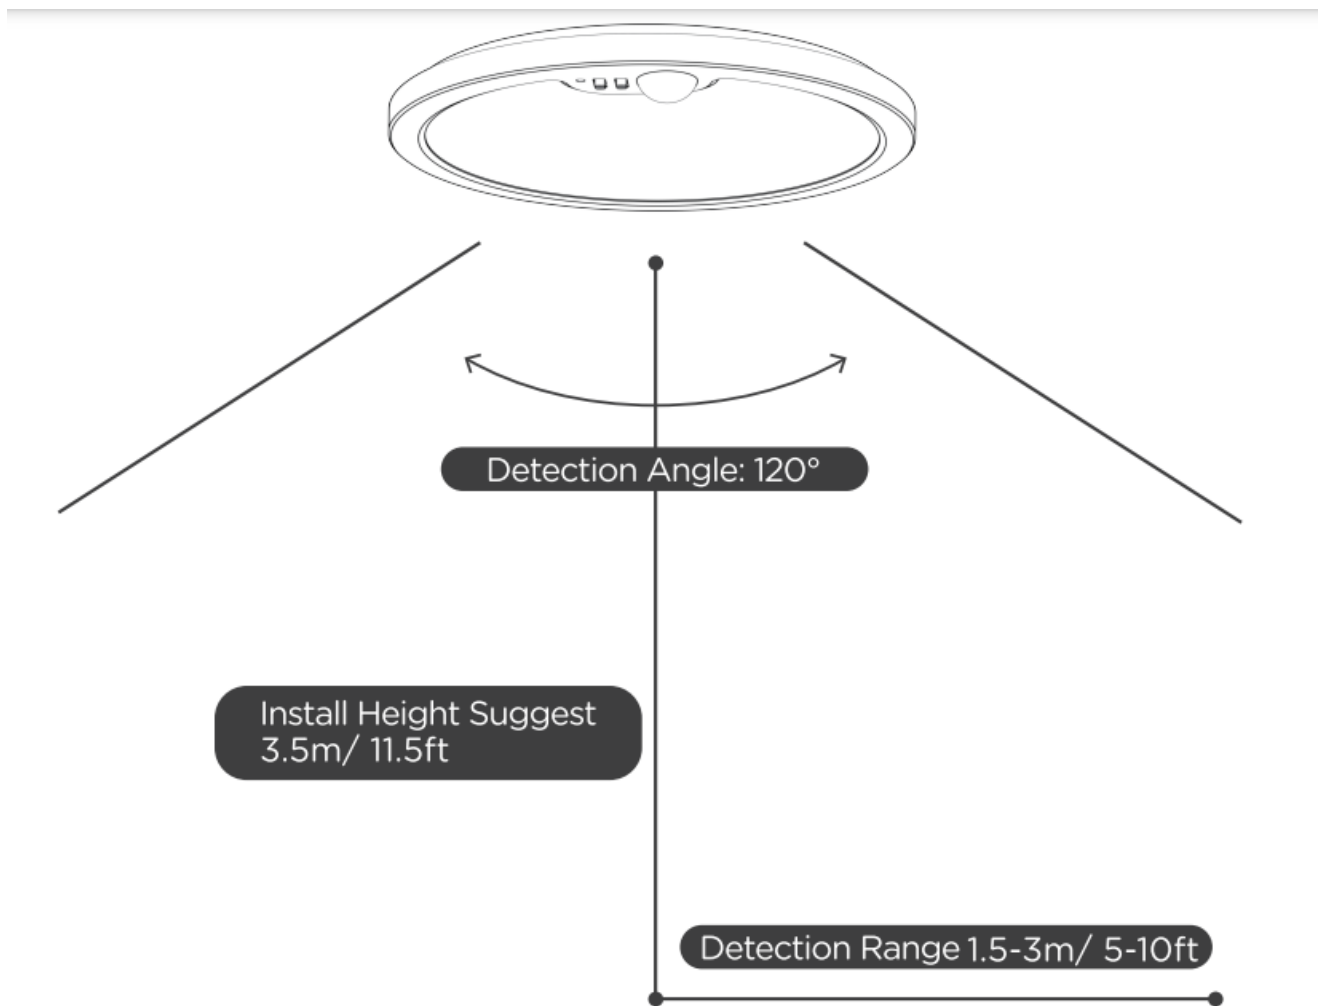


THREE MODES INTRODUCTION:

- **AUID(Motion & Light Sensor):** The light will turn on when detecting movement in DARK enough condition,
- **ON(Light Always):** The light will keep on all the time.
- **G(Only Motion Sensor Mode):** The light will turn on as long as it detects human's movement, not only in the dark but also in the daytime.

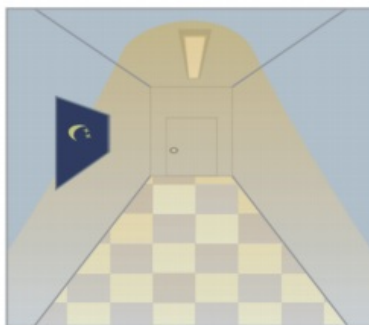

TOGGLE SWITCH INTRODUCTION:


3 colors in 1: 3000K/ 4000K/ 5000K color selectable before installation.

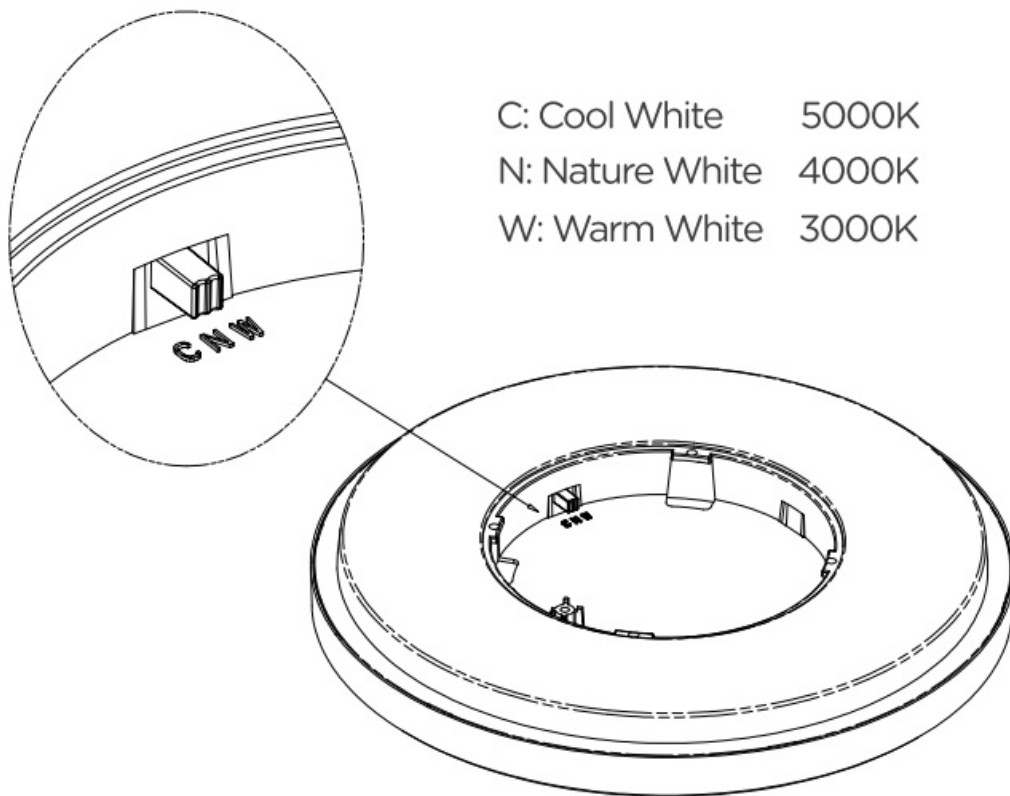

MADE IN CHINA



Documents / Resources

	BLNAN LD-GB-029WM Motion Sensor Ceiling Light Wired [pdf] User Manual LD-GB-029WM Motion Sensor Ceiling Light Wired, LD-GB-029WM, Motion Sensor Ceiling Light Wired, Sensor Ceiling Light Wired, Ceiling Light Wired, Light Wired, Wired
---	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.