



BULOVA COMPUTRON 97C110 Mens Watch Owner's Manual

[Home](#) » [Bulova](#) » BULOVA COMPUTRON 97C110 Mens Watch Owner's Manual 


BULOVA

COMPUTRON 97C110 Mens Watch
Owner's Manual

Contents

- [1 COMPUTRON 97C110 Mens Watch](#)
- [2 Features](#)
- [3 Operation Manual](#)
- [4 Specification](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)

COMPUTRON 97C110 Mens Watch

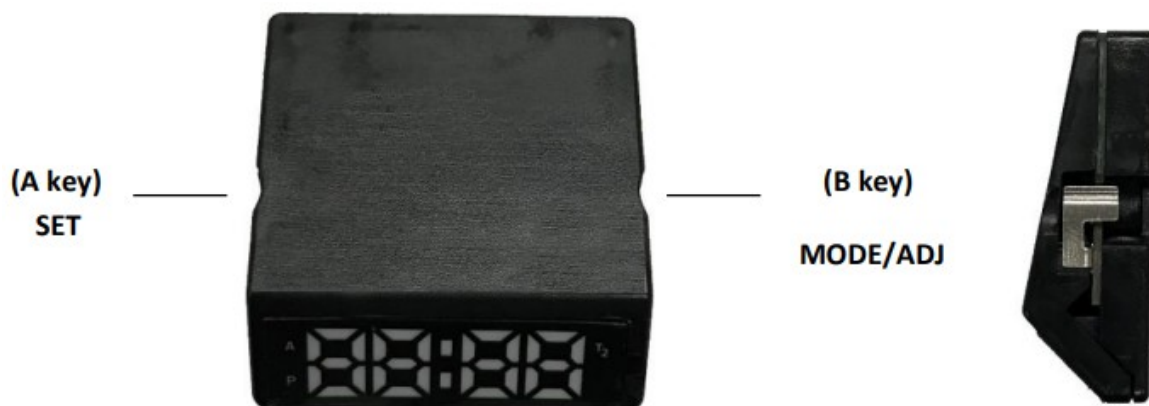


Features

- > Four digits LED display: hour, minute, second, month, date, day.

- 12/24 hour format.
- 81 years fully automatic calendar (from 2019 to 2099).
- Dual time.


Operation Manual

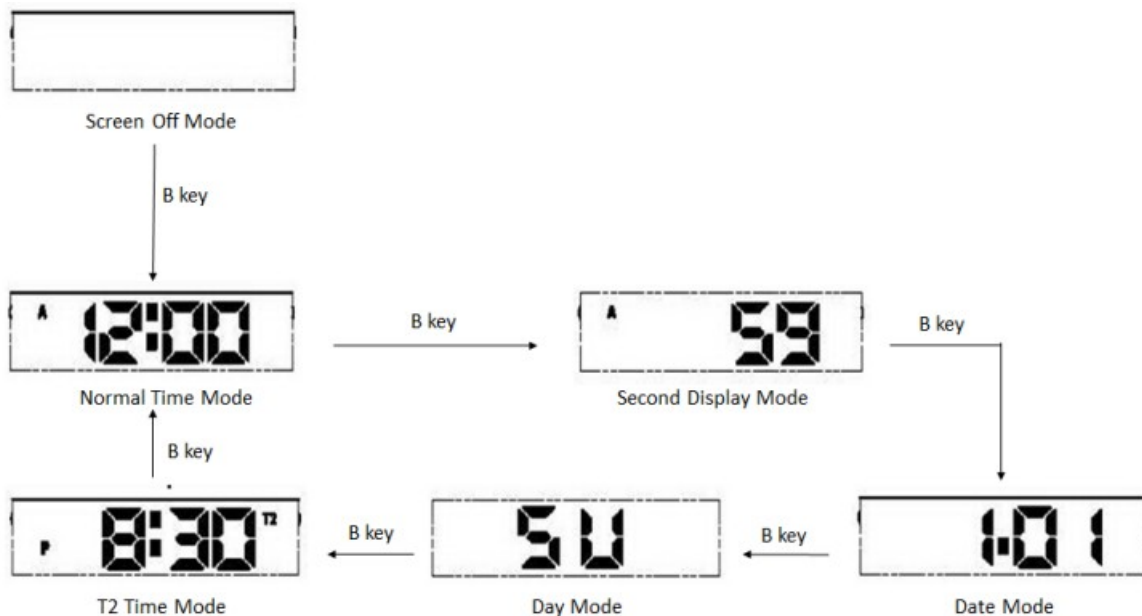

- In the Screen Off Mode, press B key to display the normal time first.
- In Normal Time Mode, press B to shift the display mode: hour, minute, second, date, day and T2 (dual zone) time.
- If there is no key operation for 5 seconds, it will enter into the Screen Off Mode automatically.

1. Time and Date Setting


- In the Normal Time Mode, press (using the tip of a pen or other sharp object) and hold A key for 3 seconds to enter the setting mode, and then press the A key to move the flashing item as follows:

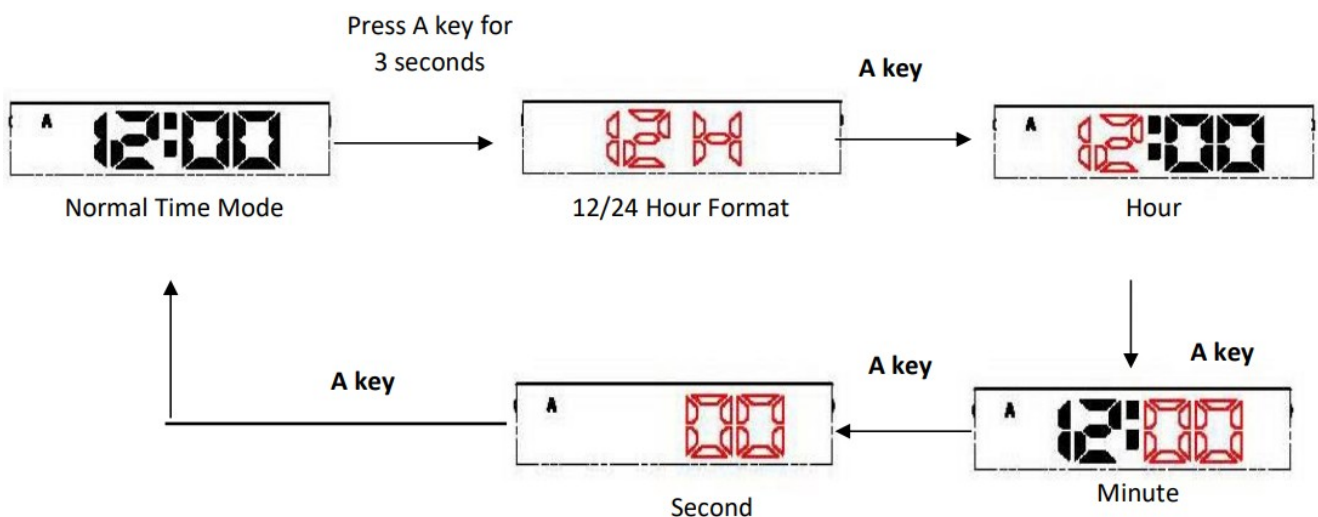

- When 12 or 24 flashes, press B key to select 12 or 24 hour format.
- Press B key to increase value, press and hold B key to increase the value quickly.
- When setting seconds, press B key to reset the seconds to "00".
- In setting mode, if there is no key operation for 10 seconds, it will return to the Normal Time Mode.

2. Date Setting


- In the date mode, press and hold the A key for 3 seconds to enter the setting mode, and then press A key to move flashing item as follows:

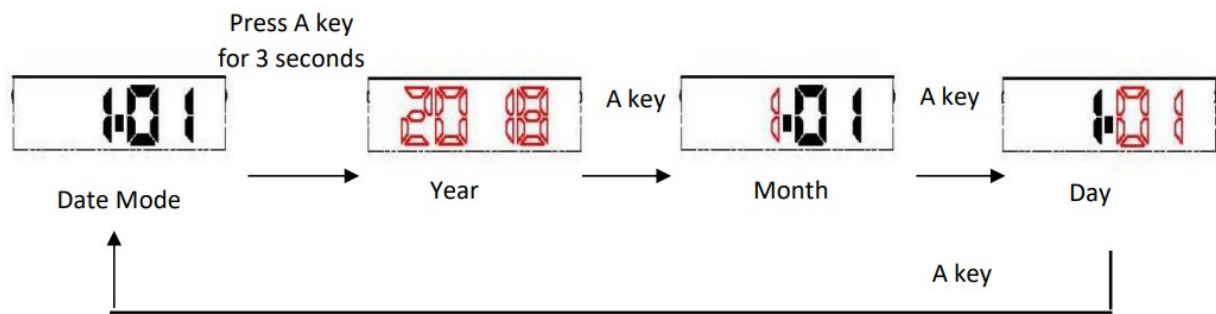

- Press B key to increase the value, press and hold B key to increase the value quickly.
- In the setting mode, if there is no key operation for 10 seconds, it will return to date mode.

3. T2 Time Setting


- In the T2 Time Mode, press and hold the A key for 3 seconds to enter the setting, and then press the A key to move the flashing item as follows:

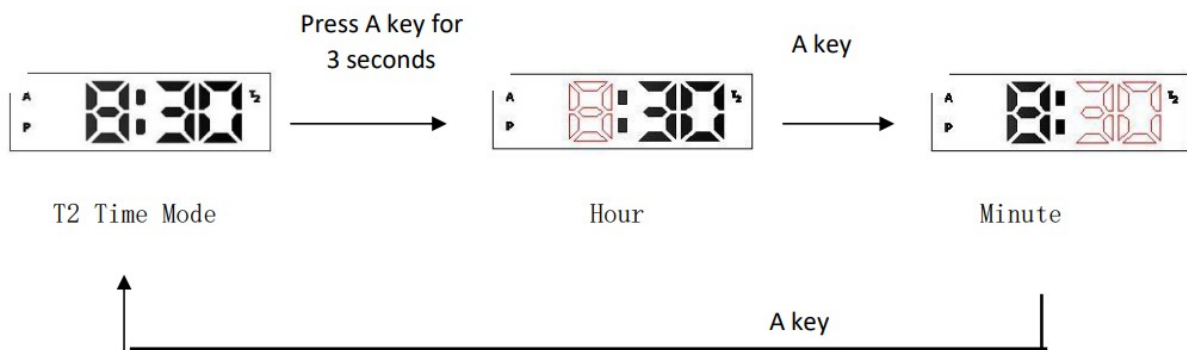

- Press B key to increase the value, press and hold B key to increase the value quickly.
- In the setting mode, if there is no key operation for 10 seconds, it will return to T2 Time Mode.

Note: Press A key and B key at the same time can display all the LEDs. If keys are not pressed, the display will return to the original mode.

- Normal time default: AM12:00 00
- Date default: January 1st, 2019
- T2 time default: AM6:00 00
- The day is shown as below.

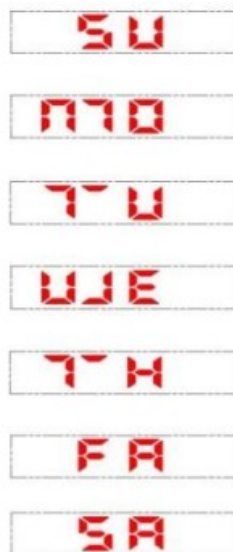

Specification


- Module Size: 27.2*25.5mm
- Module Thickness: 9.00mm
- Operational Temperature Range: -10°C—+60°C

- Operational Voltage: 3.0V
- Accuracy: $\pm 30\text{sec/month}$
- Battery Code and Capacity: CR2032 (220mAh)
- Average Static Current: $1.43\mu\text{A}$ (static maximum current: $10.68\mu\text{A}$)
- LED Illumination Average Current: 527.91mA (LED light maximum current: 35.00 mA)
- Battery Life (85%): 24 months

(Battery life is calculated according to LED illumination of 5 times a day and 3 seconds per time, for a total of 15 seconds per day).

BULOVA

Documents / Resources

	<p>BULOVA COMPUTRON 97C110 Mens Watch [pdf] Owner's Manual 97C110, COMPUTRON 97C110 Mens Watch, Mens Watch, Watch</p>
---	---