



C-LITE C-TR-C-FP-SCCT LED Selectable Flat Panel Instruction Manual

[Home](#) » [C-LITE](#) » C-LITE C-TR-C-FP-SCCT LED Selectable Flat Panel Instruction Manual 




INSTALLATION INSTRUCTIONS C-LITE Backlit LED Flat Panel With Selectable CCT and Wattage C-TR-C-FP-SCCT LED Selectable Flat Panel Instruction Manual

Contents

- [1 C-TR-C-FP-SCCT LED Selectable Flat Panel](#)
- [2 IMPORTANT SAFEGUARDS](#)
- [3 READ AND FOLLOW ALL SAFETY INSTRUCTIONS](#)
- [4 INSTALLATION](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)

C-TR-C-FP-SCCT LED Selectable Flat Panel

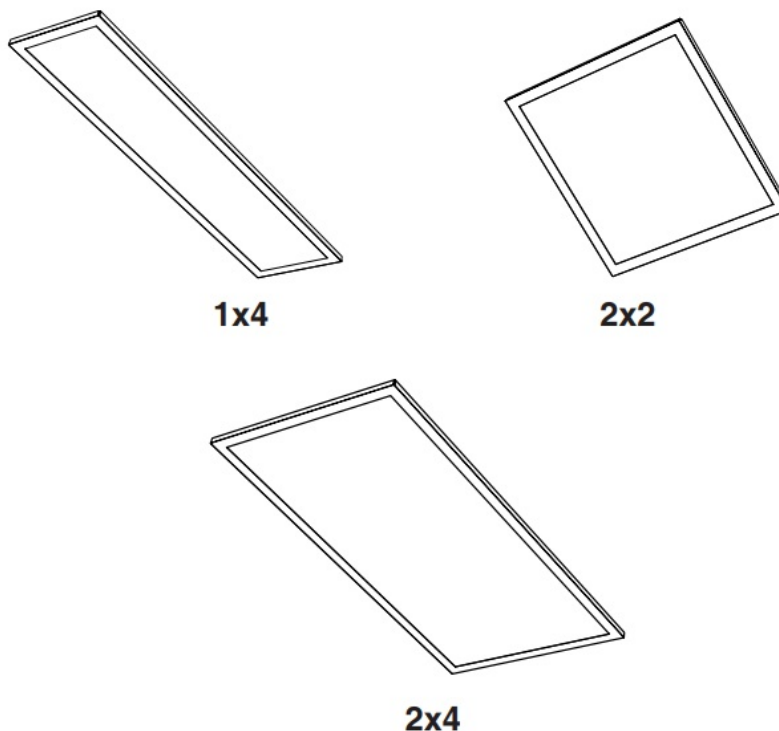

CAUTIONS

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. **DANGER**– Risk of shock- Disconnect power before installation.
2. **CAUTION** – Risk of Fire.
3. This luminaire must be installed in accordance with the NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician
4. Suitable for damp locations.
5. ACCESS ABOVE THE CEILING IS REQUIRED. ACCES REQUIS AU-DESSUS DU PLAFOND.
6. INHERENTLY PROTECTED.
7. TYPE IC. The vapor barrier must be suitable for 90°C.
8. FOR USE IN NON-FIRE-RATED INSTALLATIONS ONLY.
9. NO USER-SERVICEABLE PARTS.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

Document:	LPN00701X0001A0_B	Date 8-25-2021
Created By:	TMT	

INSTALLATION

1. Locate desired fixture located in the ceiling grid.
2. Remove the existing ceiling panel at the chosen location. Remove adjacent ceiling panels to allow for wiring access from above.
3. Place fixture into T-bar ceiling grid. Bend clips on top of the fixture up and rotate out to engage with the T-bar support grid. See Figure 1. Secure fixture to grid in compliance with state and local codes.
4. Remove the screw on the driver wiring chamber, disengage the retention spring clip, and remove the cover. Set screw and cover aside to be reinstalled later.
5. Remove appropriate 1/2" knockout(s) to allow for entry of supply wiring into the wiring chamber.
6. Make wiring connections per the Fixture Wiring section.
7. Reattach the cover of the wiring chamber with a screw that was removed in Step 4 above.
8. Select the desired CCT and wattage using the dip switch on the top of the driver enclosure. See Figure 2.
9. Replace the adjacent ceiling panel removed in Step 2.

FIGURE 1


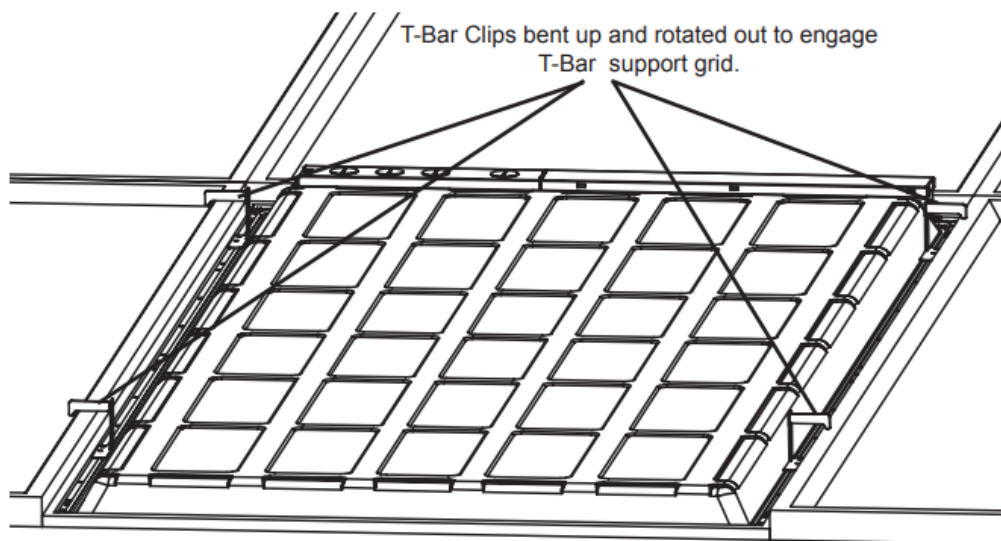


FIGURE 2




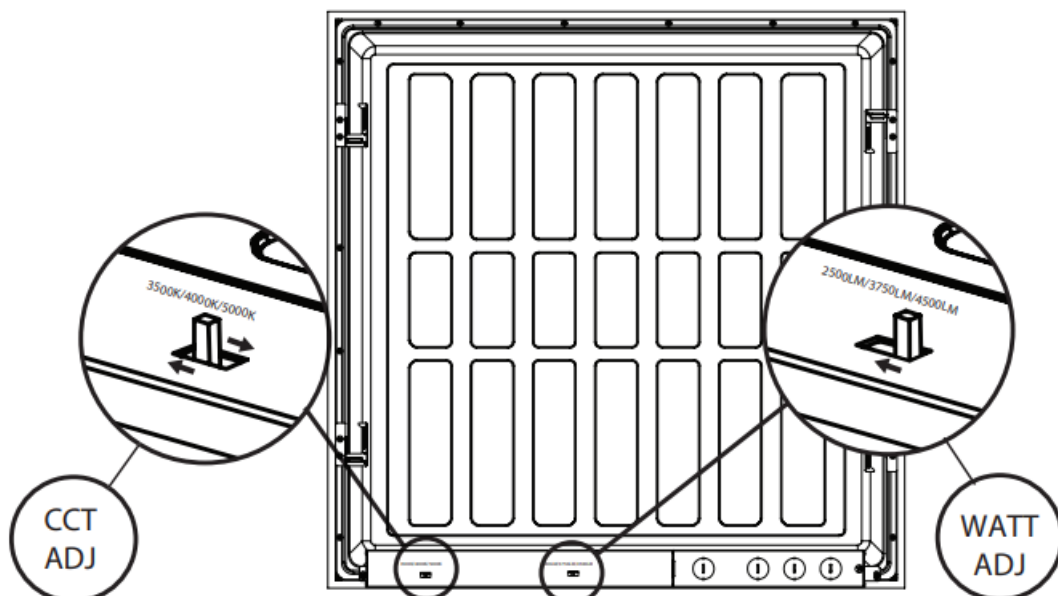

<http://lighting.cree.com/warranty>

1-800-236-6800

Documents / Resources



[C-LITE C-TR-C-FP-SCCT LED Selectable Flat Panel](#) [pdf] Instruction Manual
C-TR-C-FP-SCCT, LED Selectable Flat Panel, C-TR-C-FP-SCCT LED Selectable Flat Panel, S
electable Flat Panel, Flat Panel

References

- [Warranties - Cree Lighting](#)

[Manuals+](#).