



## Cable Matters USB-C DisplayPort Multiport Adapter Power Delivery User Manual

[Home](#) » [Cable Matters](#) » Cable Matters USB-C DisplayPort Multiport Adapter Power Delivery User Manual

## Contents [ [hide](#) ]

1	Cable Matters USB-C DisplayPort Multiport Adapter Power Delivery User Manual
2	1. Introduction
3	1.2 Copyright and Trademarks
4	1.3 FCC Compliance Statement
5	2. Product Overview
5.1	2.1 Package Contents
6	2.2 Product Description
7	2.3 Product Features
8	2.4 System Requirements
9	3. Connection and Operating Instructions
9.1	3.1 Application Diagram
10	3.2 Connecting the Adapter to a Laptop with Power Delivery
11	Installation Instructions
12	Troubleshooting Tips (for charging a laptop)
13	Important Notes: (when using the P.D. power port)
14	3.3 Connecting to a LAN or Router
15	Installation Instructions
16	Troubleshooting Tips
17	Windows (Duplicate or Extend the Display)
18	Mac (Duplicate or Extend the Display)
19	3.5 Connecting a USB Peripheral Device
20	Troubleshooting Tips
21	3.6 Troubleshooting Tips for Windows
22	Cabling
23	Computer/Host Source
24	3.7 Troubleshooting Notes for Mac
25	4. Technical Specifications
26	5. Warranty and Support
27	5.2 Warranty Information
28	5.3 Limitation of Liability
29	Read More About This Manual & Download PDF:
30	Documents / Resources
30.1	References
31	Related Posts

## Cable Matters USB-C DisplayPort Multiport Adapter Power Delivery User Manual



## 1. Introduction

Thank you for your purchase from Cable Matters® Inc., the 'Reliable Connectivity' company. This User Manual provides an overview of the features and installation of your new USB-C™ to DisplayPort™ Multiport Adapter with Power Delivery

Please read these instructions carefully before connecting, operating or configuring this product. Please keep this user manual for future reference.

Contact [support@cablematters.com](mailto:support@cablematters.com) for questions or product support.

### 1.2 Copyright and Trademarks

Specifications are subject to change without notice. Cable Matters is a registered trademark or trademark of Cable Matters Inc. All rights reserved. All other trademarks are the property of their respective owners.

Thunderbolt and the Thunderbolt Logo are trademarks of Intel Corporation in the U.S. and/or other countries. USB Type-C™ and USB-C™ are trademarks of USB Implementers Forum DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

macOS® is a trademark of Apple Inc., registered in the U.S. and other countries. Windows® is a registered trademark of Microsoft Corporation in the U.S. and other countries.

### 1.3 FCC Compliance Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1) This device must not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

## 2. Product Overview

### 2.1 Package Contents

Please check that the following items are contained in the package:

- USB-C to DisplayPort Multiport Adapter with Power Delivery
- Quick Start Guide (User manual is available [cablematters.com/dl/201046](https://cablematters.com/dl/201046))

### 2.2 Product Description

The Cable Matters® USB-C™ to DisplayPort Multiport Adapter with Power Delivery is an essential companion for computers with a USB-C or Thunderbolt™ 3 port. Connect to a Fast network, a USB peripheral device, and a monitor with DisplayPort. Simultaneously charge a laptop while transferring data or viewing video.

### 2.3 Product Features

- USB-C™ and Thunderbolt™ 3 port compatible
- Connect a monitor with DisplayPort input
- Connect to a Fast Ethernet network
- Connect USB peripherals such as a flash drive, keyboard or mouse
- Supports 8K DisplayPort video resolutions up to 7680 x 4320 @ 60Hz
- Power and charge a laptop up to 60 watts


## 2.4 System Requirements

Computer	USB 3.1 Type-C™ or Thunderbolt™ 3 computer port
Supported OS	Windows 10 macOS 10.9 or higher Chrome OS, Linux, Android (with DP Alt mode) DisplayPort input port and a DisplayPort cable
Ethernet Network:	LAN or router with an RJ45 port
USB 2.0	USB Type-A cable to connect a peripheral device
Power Delivery 2.0/3.0	USB-C charger or USB-C charger/cable
<a href="http://www.cablematters.com">www.cablematters.com</a>	

## 3. Connection and Operating Instructions

### 3.1 Application Diagram

#### ***Full-Featured Device with USB-C / Thunderbolt 3***

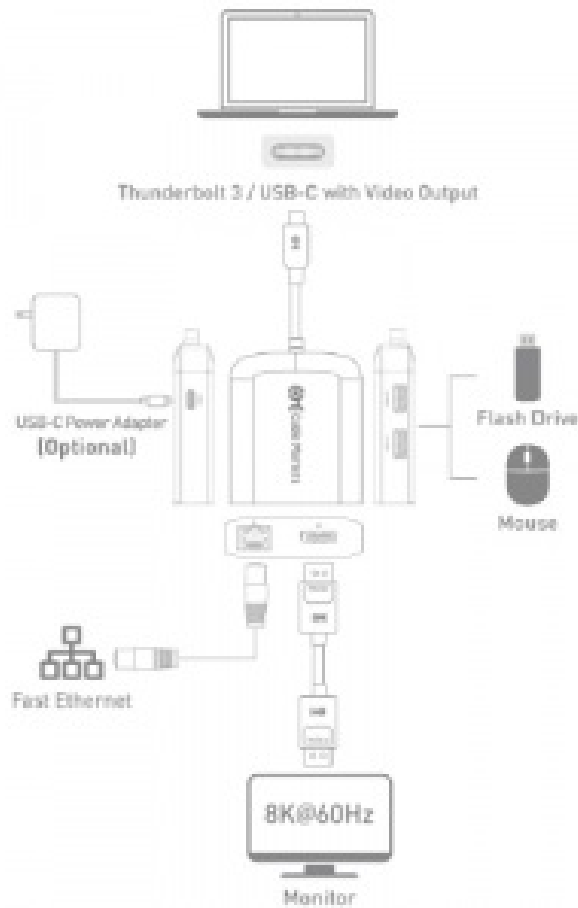

- Connect to a Fast Ethernet network
- Connect two USB 3.0/2.0 peripheral devices
- Connect a display with DisplayPort input
- Connect a USB-C charger to charge a laptop while in use

### 3.2 Connecting the Adapter to a Laptop with Power Delivery

The Multiport Adapter can be connected to a USB-C charger to provide power to the Adapter or charge a laptop while in use (with P.D. equipped computers).



### Installation Instructions

1. Test with a fully charged laptop
2. Connect DisplayPort and Ethernet cables BEFORE connecting the Adapter

3. Connect a USB-C charger to the P.D. port of the Adapter
4. Connect the Adapter to a USB-C port on the computer
5. Look for the charging icon indicator on your computer


### **Troubleshooting Tips (for charging a laptop)**

- Check that the blue LED in the logo is lit on the Adapter
- USB-C Power Delivery 2.0/3.0 must be supported by your computer to charge a laptop
- USB-C charger or charger/cable must be rated for USB-C Power Delivery 2.0/3.0
- Adapter can only charge up to 60 watts (some computers use more)
- Use the USB-C charger/cable that came with the laptop for the best performance

### **Important Notes: (when using the P.D. power port)**

- Do NOT disconnect power to the Adapter while in use or it may interrupt the video, Ethernet, or USB functions
- Steps if the connected display or Ethernet function is not working:
  1. Unplug the Adapter
  2. Check the P.D. connection to the USB-C charger
  3. Check that the DisplayPort and Ethernet cables are securely connected
  4. Reconnect the Adapter to the computer
  5. Disconnect all cables, reboot the computer, and reconnect the cables and Adapter

### **3.3 Connecting to a LAN or Router**

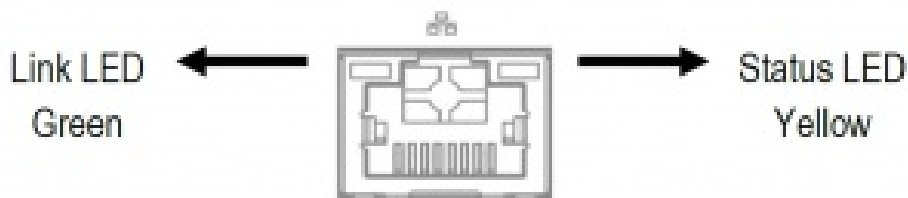

### **Installation Instructions**

1. Connect an RJ45 Ethernet patch cable to the Adapter
2. Connect the patch cable to a LAN or router port
3. Connect the Adapter P.D. port to a USB charger for the best performance
4. Connect the Adapter to a USB-C port on the computer
5. Check the documentation of your LAN or router to configure network access
6. Link and Status LED's should blink to indicate a live connection

### **Troubleshooting Tips**

- Disconnect all cables, reboot the computer, and reconnect the cables and Adapter
- Check that the Link and Status LEDs are lit

- Test by turning off all wireless connections
- Update the USB-C drivers from the computer manufacturer
- Test the patch cable with a different device or try another USB port
- Gigabit Ethernet speeds are NOT supported, only Fast Ethernet speed
- Some USB-C devices may not support an Ethernet connection over USB-C

## **Windows**

Search 'Device Manager' > Click on: Universal Serial Bus devices > Cable Matters USBC Multiport Adapter

## **Mac**

Search: About this Mac > System Report > Hardware > USB > USB 3.0 Bus > USB 2.0 Hub > USB-C to Multiport Adapter with Charging

## Installation Instructions

1. Connect an DisplayPort cable (sold separately) to the Adapter
2. Connect the cable to the DisplayPort input of the monitor
3. Connect the Adapter P.D. port to a USB charger for the best performance
4. Connect the Adapter to a USB-C port on the computer
5. Select the DisplayPort video and audio input from the display menu
6. Select the audio output from the computer (optional)

## Troubleshooting Tips

- Disconnect all cables, reboot the computer, and reconnect the cables and Adapter
- DisplayPort Alternate mode must be supported by your device
- 8K video resolution requires a 8K-rated source, cable, and monitor
- Check that your computer supports an external video monitor
- Check for updated video graphics drivers from the computer maker
- Test with an HD (not 8K) display, if possible

## **Windows (Duplicate or Extend the Display)**

Video: Press Windows Logo + P or

Search Display > Click Adjust Resolution

Audio: Search Sound > Click on the display name > Set Default > OK


## **Mac (Duplicate or Extend the Display)**

Video: Apple Menu > System Preferences > Displays > Select the Arrangement Tab >

Choose to Duplicate or Extend the display

Audio: Apple Menu > System Preferences > Sound > Output

## **3.5 Connecting a USB Peripheral Device**

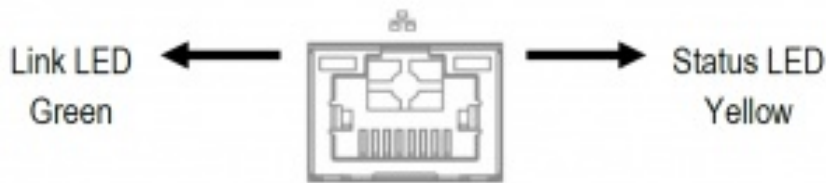

## Installation Instructions

1. Connect a USB 2.0 or 3.0 device to the Adapter (cables sold separately)
2. Connect the Adapter P.D. port to a USB charger for the best performance
3. Connect the Adapter to a USB-C port on the computer
4. The device should be recognized after downloading any needed drivers
5. Always Safely Remove or Eject the device before unplugging

## Troubleshooting Tips

- Disconnect all cables, reboot the computer, and reconnect the cables and Adapter
- USB 2.0 port will not charge a device like a smartphone
- Test the USB device with a different computer
- Test the USB device with a different USB cable
- USB 3.0 devices will be limited to the USB 2.0 data transfer rate

## 3.6 Troubleshooting Tips for Windows

- When using Power Delivery to charge a laptop, first connect all cables and the USB-C charger BEFORE connecting the Adapter
- Check that your computer recognizes the Adapter – Blue LED should be lit
- Search 'Device Manager' > Click on: Universal Serial Bus devices > Cable Matters USB-C Multiport Adapter

## Cabling

- Check that all cable and adapter connections are secure
- Test any connected cables with different equipment
- 8K DisplayPort video resolution requires a 8K cable

## Computer/Host Source

- Test with a fully charged computer and the P.D. port connected to a charger
- Try different video resolution and refresh rates supported by the display
- Check the DisplayPort audio output from the Playback Devices on the taskbar
- Verify that the DisplayPort audio is not muted
- Disconnect all cables, reboot the computer, and reconnect the cables and Adapter

Check for updated BIOS, firmware and software drivers from the computer manufacturer Computers with Thunderbolt 3 ports can check for driver information at:



## Connected Display

- DisplayPort Alternate mode must be supported by your device for video
- Select the DisplayPort input from the display menu
- Adjust the audio level from the display menu
- Test with an HD (not 8K) display, if possible
- 8K DisplayPort video resolution requires a 8K-rated display

## 3.7 Troubleshooting Notes for Mac

- When using Power Delivery to charge a laptop, first connect all cables and the USB-C charger BEFORE connecting the Adapter
- Check that your computer recognizes the Adapter – Blue LED should be lit
- Search: About this Mac > System Report > Hardware > USB > USB 3.0 Bus > USB 2.0 Hub > USB-C to Multiport Adapter with Charging

## Cabling

- Check that all cable and adapter connections are secure
- Test any connected device cables with different equipment
- 8K DisplayPort video resolution requires a 8K cable

## Computer Source

- Test with a fully charged computer and the P.D. port connected to a charger
- Check for updated OS software patches from Apple
- Try different video resolution settings supported by the display
- Check the DisplayPort audio output from the Sound menu in System Preferences
- Verify that the DisplayPort audio is not muted
- Disconnect all cables, reboot the computer, and reconnect the cables and Adapter

## Connected Display

- Select the DisplayPort input from the display menu
- Adjust the audio level from the display menu or remote
- Test with an HD video resolution display, if possible
- 8K DisplayPort video resolution requires a 8K-equipped display

## 4. Technical Specifications

Host Connector: USB-C Male

Network Connector: RJ45 8P/8C 568-B Female

USB-A Ports: 2x USB 2.0 Type A Female

Video Port: DisplayPort Female  
PD Port: USB-C Power Delivery  
OS Support Windows 10, macOS 10.9 or higher  
Chrome OS, Linux, Android (with DP Alt mode)  
DisplayPort Resolution Support Up to 7680 x 4320 @ 60Hz  
DisplayPort Audio Support 8-Channel LPCM, compressed audio  
Adapter Housing L x W x H /Cable Tail 3.1 x 2.7 x 0.8 / 11 Inches  
Compliance C E, FCC, RoHS  
Warranty: Limited One-Year  
Note: Specifications are subject to change without notice

## 5. Warranty and Support

### 5.1 Customer Support and Contact Information

Cable Matters offers lifetime technical support as an integral part of our commitment to provide industry leading solutions.

Email us with any questions at [support@cablematters.com](mailto:support@cablematters.com).

### 5.2 Warranty Information


This product is backed by a limited one-year warranty. The warranty covers parts and labor costs only. Cable Matters does not warrant its products from defects or damages arising from misuse, abuse, or normal wear

### 5.3 Limitation of Liability

In no event shall Cable Matters Inc. (including their officers, directors, employees or agents) be liable for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of data, loss of profits, loss of business, or any pecuniary loss, arising out of, or related to the use of this product exceeding the actual price paid for the product (as allowed by state law).

***Read More About This Manual & Download PDF:***

## Documents / Resources

 <p><b>Cable Matters</b> USB-C™ to DisplayPort™ Multiport Adapter with Power Delivery Model 201046</p> <p>• Cable Matters and its products are not responsible for any damage or loss of data, loss of profits, loss of business, or any pecuniary loss, arising out of, or related to the use of this product exceeding the actual price paid for the product (as allowed by state law).</p> <p>Not a Manufacturer <a href="mailto:support@cablematters.com">support@cablematters.com</a></p>	<p><a href="#">Cable Matters USB-C DisplayPort Multiport Adapter Power Delivery</a> [pdf] User Manual USB-C DisplayPort Multiport Adapter Power Delivery, 201046</p>
---	--

## References

- [cablematters.com/dl/201046](https://cablematters.com/dl/201046)
- [Cable Matters Knowledge Base](#)
- [Cables, Adapters, & Docking Stations: USB-C, Thunderbolt 3, DisplayPort, HDMI, DVI, VGA, USB, Computer, SATA, SAS, Ethernet, Networking, AV, Power | Cable Matters](#)

