



CASAMBI CBU-DCS Bluetooth Controllable DALI Controller Installation Guide

[Home](#) » [CASAMBI](#) » CASAMBI CBU-DCS Bluetooth Controllable DALI Controller Installation Guide 

*CASAMBI CBU-DCS Bluetooth Controllable DALI
Controller Installation Guide*

ENGLISH

CASAMBI
www.casambi.com

CBU-DCS

Bluetooth controllable DALI controller



www.casambi.com

Contents

- 1 Description
- 2 Wiring diagram, sensor
- 3 Wiring diagram, DALI LED driver and DALI sensor
- 4 Installation
- 5 Range
- 6 Dimensions
- 7 Technical data
- 8 Documents / Resources
 - 8.1 References
- 9 Related Posts

Description


CBU-DCS is a Bluetooth controllable, Casambi enabled DALI controller. CBU-DCS does not have its own power supply. Instead, it is powered directly from a DALI bus.

CBU-DCS can be used with a DALI sensor for presence detection or daylight harvesting, or it can be used for controlling DALI drivers that have an integrated DALI bus power supply.


CBU-DCS can be controlled with Casambi app which can be downloaded free of charge from Apple App Store and Google Play Store.

Different Casambi enabled products can be used from a simple one luminaire direct control to a complete and full featured light control system where up to 127 units form automatically an intelligent mesh network.

Wiring diagram, sensor

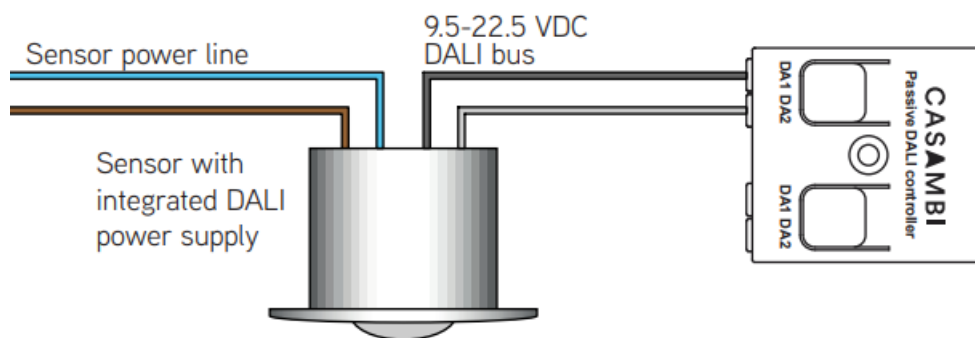

Wiring diagram, DALI LED driver and DALI sensor

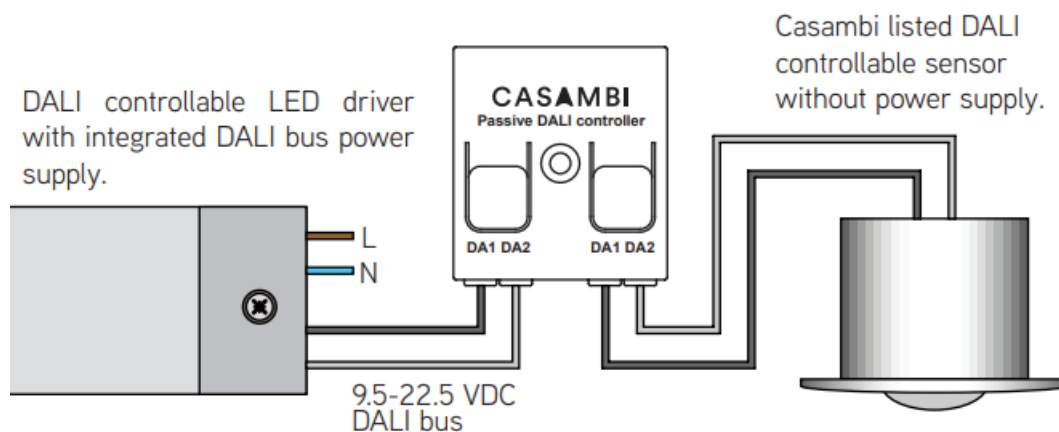

Installation


CBU-DCS draws its operating power directly from the DALI bus. For this reason, it is important to make sure that the DALI bus is externally powered. If CBU-DCS is connected directly to a DALI sensor or a DALI driver, these products must have an integrated DALI bus power supply. CBU-DCS draws 5 mA in idle mode with 30 mA peak current from the DALI bus.

Use 0,5-1,5 mm² solid or stranded conductor electrical wires. Strip the wire 6-8 mm from the end. Using wire ferrules is not recommended. Press the buttons on top of the dimmer case and insert the wires into the corresponding holes. The polarity of DA1 and DA2 does not matter.

CBU-DCS has two sets of connectors. These connectors are internally connected in parallel with each other. This way the DALI bus can be routed through the product for easy installation.

CBU-DCS, as any other Casambi product, should not be placed in a metal enclosure or next to large metal structures. Metal will effectively block radio signals which are crucial to the operation of the product. A thorough connectivity testing is strongly recommended in the installation site.

Range

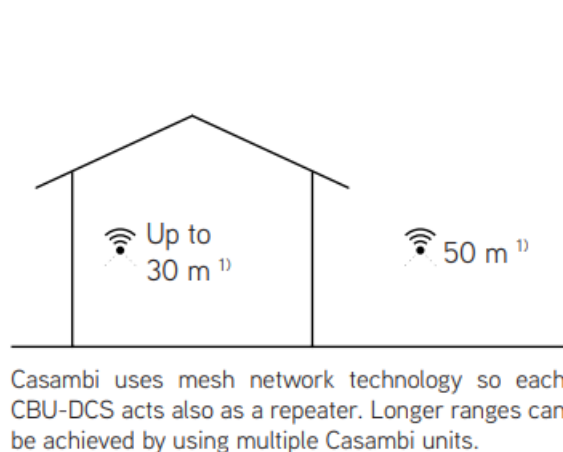

Compatible devices:

iPhone 4S or later

iPad 3 or later

iPod Touch 5th gen or later

Android 4.4 KitKat or later devices


produced after 2013 with full BT

4.0 support

[App Store](#)

[Google Play Store](#)

Dimensions

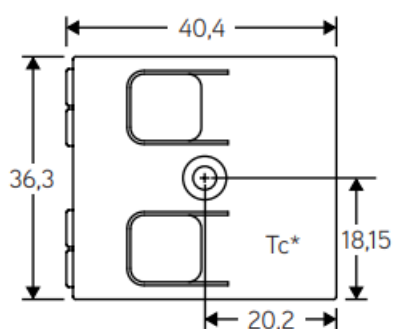


* Tc point is on bottom side

Wire info:

Solid and stranded:

0,5-1,5 mm²/16-20 AWG

Strip length: 6-8 mm



Disposal Instructions

In line with EU Directive 2002/96/EC for waste electrical and electronic equipment (WEEE), this electrical product must not be disposed of as unsorted municipal waste.

Please dispose of this product by returning it to the point of sale or to your local municipal collection point for recycling.

Technical data

Input

Voltage range:	9,5-22,5 VDC
Input current when idle, I_{idle} :	5 mA
Peak input current, I_{peak} :	30 mA
Max. DALI bus current:	250 mA
Standby power:	< 0,1 W

Radio transceiver

Operating frequencies:	2,4...2,483 Ghz
Maximum output power:	+4 dBm

Operating conditions

Ambient temperature, t_a :	-20...+55°C
Max. case temperature, t_c :	+65°C
Storage temperature:	-25...+75°C
Max. relative humidity:	0...80%, non-cond.

Connectors

Wire range, solid & stranded:	0,5 - 1,5 mm ² 16 - 20 AWG
Wire strip length:	6 - 8 mm

Mechanical data

Dimensions:	40,4 x 36,3 x 14,0 mm
Weight:	15 g
Degree of protection:	IP20 (indoor use only)

Insulation

Casing to DALI:	Reinforced
-----------------	------------


CASAMBI

Lighting control for the Modern World
Casambi Technologies Oy Bertel Jungin aukio 1E 02600 Espoo, Finland

Information in this document is subject to change. CBU-DCS User Guide v1.4 ENG

Copyright Casambi Technologies Oy 2018.

Documents / Resources



[CASAMBI CBU-DCS Bluetooth Controllable DALI Controller](#) [pdf] Installation Guide CBU-DCS, Bluetooth Controllable DALI Controller

References

-  [Casambi - Smart Lighting Control](#)

[Manuals+.](#)