

CASIO 5125 Analog Watch



CASIO 5125 Analog Watch Instruction Manual

[Home](#) » [Casio](#) » CASIO 5125 Analog Watch Instruction Manual 

Contents

- [1 CASIO 5125 Analog Watch](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 INTRODUCTION](#)
- [5 Usage Instructions](#)
- [6 Specifications](#)
- [7 Frequently Asked Questions](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)

CASIO

CASIO 5125 Analog Watch



Product Information

Specifications

- **Module No.:**
5125/5128/5206/5207/5237/5249/5361/5167/5180/5199/5223/5342/5343/5358/5218/5250/5284/5364/5339/5340/5
- **Accuracy at normal temperature (per month):** Varies by module
- **Battery type:** SR626SW, SR920SW, SR621SW, SR616SW, SR521SW, SR920SW, SR716SW
- **Battery life:** Approx. 2-5 years, depending on the module
- **Low Battery Indicator:** Second hand moves in 2-second increments. When power is low (Module 5364)

Product Usage Instructions

Setting the Time:

1. When the second hand is at noon, pull out the crown to stop it.
2. Set the hands by rotating the crown. Move the minute hand four or five minutes past the desired setting, then back it up to the setting.
3. Push the crown back in on a time signal to resume timekeeping.

Crown Operation

1. When the second hand is at noon, pull out the crown to the second click to stop it.
2. Set the hands by rotating the crown. Move the minute hand four or five minutes past the desired setting, then back it up to the setting.
3. Push the crown back in on a time signal to resume timekeeping.

First Click (Day Setting):

1. Pull out the crown to the first click.
2. Set the day by rotating the crown.

3. Push the crown back into its normal position.

Second Click (Time Setting)


1. Pull out the crown to the first click.
2. Set the day by rotating the crown counterclockwise.
3. Set the day of the week by rotating the crown clockwise.
4. Push the crown back into its normal position.

INTRODUCTION

- Your watch may differ somewhat from the one shown in the illustration.

Notes

- Some water resistant models are equipped with a screw lock crown.
- With such models, you must unscrew the crown in the direction noted in the illustration to loosen it before you can pull it out.
- Do not pull too forcibly on such crowns.
- Also note that such watches are not water resistant while their crowns are loosened. Be sure to screw the crowns back in as far as they will go after making any setting.

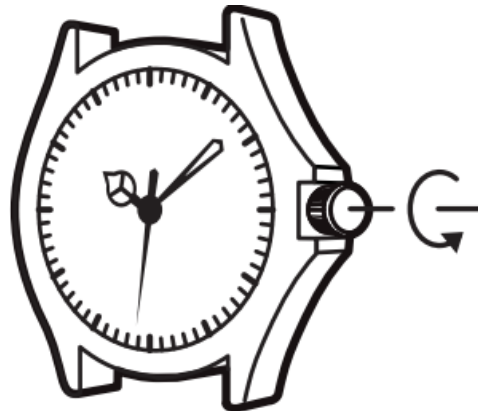


Usage Instructions

[Modules 5284, 5361, and 5364]

To set the time


1. When the second hand is at noon, pull out the crown to stop it.
2. Set the hands by rotating the crown. Move the minute hand four or five minutes past the setting you want, and then back it up to the setting.
3. Push the crown back in on a time signal to resume timekeeping.

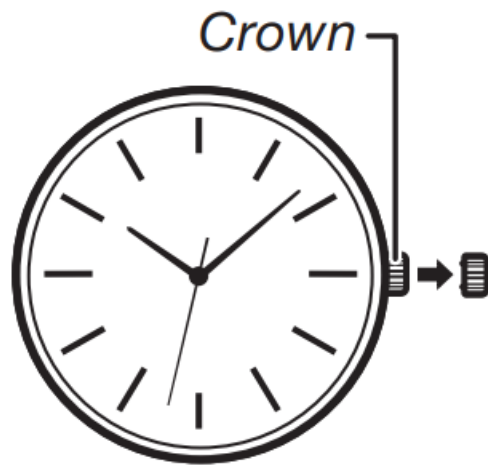

[Modules 5128, 5180, 5199, 5206, 5207, 5218, 5250, 5340, 5341, 5342, 5343, 5352, and 5358]

To set the time

1. When the second hand is at 12 o'clock, pull out the crown to the second click to stop it.
2. Set the hands by rotating the crown. Move the minute hand four or five minutes past the setting you want, and then back it up to the setting.
3. Push the crown back in on a time signal to resume timekeeping.

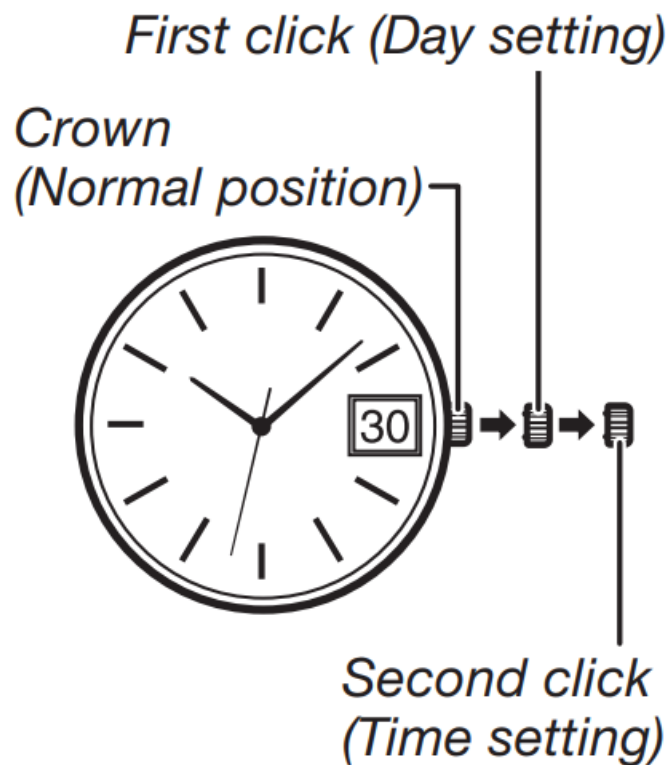


To set the day

- Avoid setting the day between 9:00 p.m. and 1:00 a. m. The day may not change in the following day if you do.
 1. Pull out the crown to the first click.
 2. Set the day by rotating the crown.
 3. Push the crown back into its normal position.

[Modules 5125, 5167, 5223, 5237, 5249, and 5339]

To set the time


1. When the second hand is at midnight, pull out the crown to the second click to stop it.
2. Set the hands by rotating the crown. Move the minute hand four or five minutes past the setting you want, and then back it up to the setting.
3. Push the crown back in on a time signal to resume timekeeping.

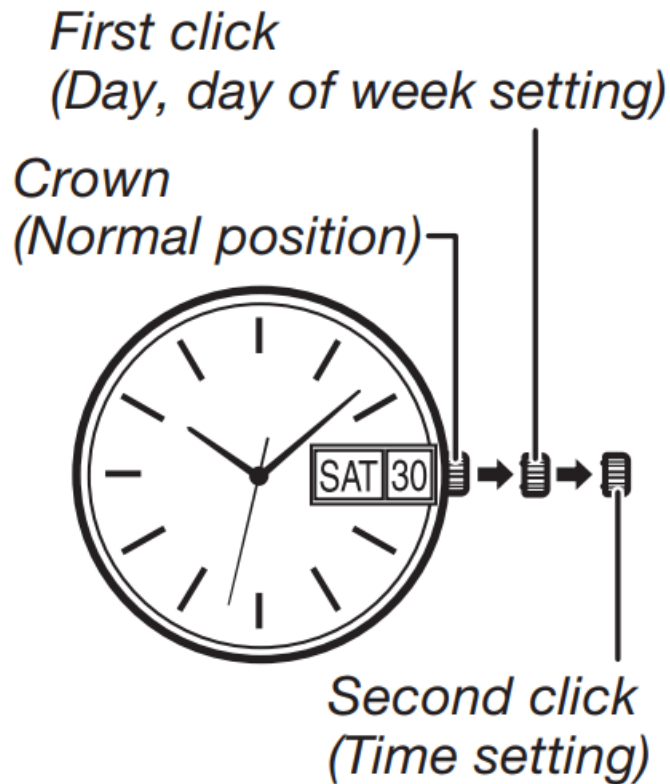


To set the day and the day of the week

- Avoid setting the day and day of the week between 9:00 p.m. and 5:00 a.m. The day and day of the week may not change in the following day if you do.
 1. Pull out the crown to the first click.
 2. Set the day by rotating the crown counterclockwise.
 3. Set the day of the week by rotating the crown clockwise.
 4. Push the crown back into its normal position.

For a watch with the elapsed time bezel:

- Rotate the elapsed time bezel to align the  mark with the minute hand.
- After a certain amount of time has elapsed, read the graduation on the elapsed time bezel, which the minute hand points to.
- The elapsed time is indicated.

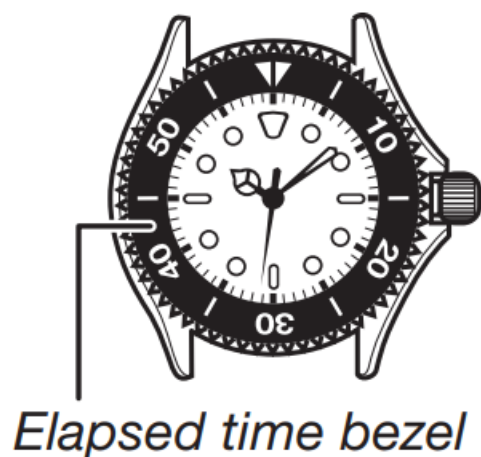

Specifications

Module No.	Accuracy at normal temperature (per month)	Battery type	Battery life
5125/5128/5206/ 5207/5237/5249/ 5361	±20 seconds	SR626SW	Approx. 3 years
5167	±20 seconds	SR920SW	Approx. 5 years
5180/5199/5223/ 5342/5343/5358	±20 seconds	SR621SW	Approx. 3 years
5218/5250	±20 seconds	SR616SW	Approx. 2 years
5284/5364	±20 seconds	SR521SW	Approx. 2 years
5339/5340/5341	±20 seconds	SR920SW	Approx. 3 years
5352	±20 seconds	SR716SW	Approx. 3 years


[Module 5364]

Low Battery Indicator: The Second hand moves in 2-second increments when power is low.

Frequently Asked Questions

- **Q: How can I tell if the battery is low in Module 5364?**
 - **A:** In Module 5364, a low battery indicator is present where the second hand moves in 2-second increments when power is low.

Documents / Resources

	<p>CASIO 5125 Analog Watch [pdf] Instruction Manual 5125 Analog Watch, 5125, Analog Watch, Watch</p>
---	--

References

-  [Your Ultimate Resource for Millions of User Manuals](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.