

# Cell2 OF01 Single LED Lighthead User Manual

[Home](#) » [Cell2](#) » Cell2 OF01 Single LED Lighthead User Manual 

Contents

1 Cell2 OF01 Single LED Lighthead User Manual

1.1 WIRING

1.2 OPERATION

1.3 INSTALLATION

1.4 APPROVED MOUNTING POSITION


2 Documents / Resources

3 Related Posts

## Cell2 OF01 Single LED Lighthead User Manual

### WIRING

12-24VDC

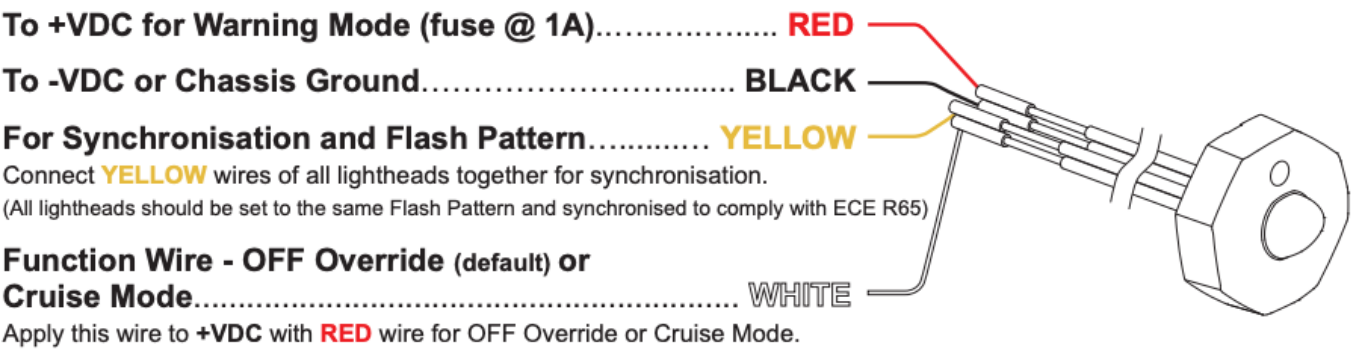

### OPERATION

For Flash Pattern Selection:

While activating a warning mode, momentarily apply **YELLOW** wire to **+VDC**:

- Once to the next pattern.
- Quick three times to the default flash pattern.

FP#	Flash Pattern
1	Double [R65]*
2	Single [2Hz]
3	Triple [2Hz]
4	Quad [2Hz]
5	Random
6	Steady EF**
7	Single-Quad
8	Single H/L
9	Single-Triple-Quint

\* Actual approval will be based on the model ordered.

\*\* For use with external flash controller.

#### For Simultaneous or Alternating Synchronisation:

1. Apply **+VDC** to RED and **YELLOW** wires simultaneously then remove **YELLOW** wire to enter *SETTING MODE*; the lighthouse will display short flashes:
  - Single flash = Group 1
  - Double flash = Group 2
2. To change Group, momentarily apply **YELLOW** wire to **+VDC**.
  - Lighthouses of the same Group will flash together.
  - Lighthouses of the different Group will flash alternately.

**Note:** To comply with ECE R65, 4 units need to be synchronised and set to the same group.
3. Save and exit *SETTING MODE* by disconnecting all power.

#### Function Wire Setting – OFF Override or Cruise Mode:

1. Apply **+VDC** to RED , WHITE and **YELLOW** wires simultaneously then remove just the **YELLOW** wire to enter *FUNCTION WIRE SETTING*; the lighthouse will display short flashes:
  - Triple flash = OFF Override (default)
  - Quad flash = Cruise Mode
2. To change Function, momentarily apply **YELLOW** wire to **+VDC**.
3. Save and exit *FUNCTION WIRE SETTING* by disconnecting all power.

#### Reset to Factory Default Settings:

1. Apply **+VDC** to **RED** and **YELLOW** wires simultaneously then remove **YELLOW** wire to enter *SETTING MODE*.
2. Apply to **+VDC** for more than 5 seconds. The lighthouse will display fast short flashes to signify restoring successfully.
3. Save and exit *SETTING MODE* by disconnecting all power.

## INSTALLATION

### (Covert Mount for Side Mirror with Turn Signal Light)

#### IMPORTANT:

The disassembling method of the original vehicle parts will be different based on each vehicle manufacturer and model, please refer to original vehicle manufacturer's manual before installation.

**1**




1. Remove the front mirror using a plastic pry tool.
2. Remove the side mirror cover by pushing the clips or loose screws from inside to access the harness assembly.
3. Disconnect the wire harness and disassemble the turn signal light assembly from the side mirror unit.

**2**



1. Drill an 8.5mm hole with 4mm depth on the inner lens or reflector of the turn signal light assembly.
2. Apply silicone and fix the lighthouse into the assembly. 3. Assemble the turn signal light back into side mirror set.
3. Route lighthouse's wire into vehicle chassis and connect the wires to the switch accordingly.

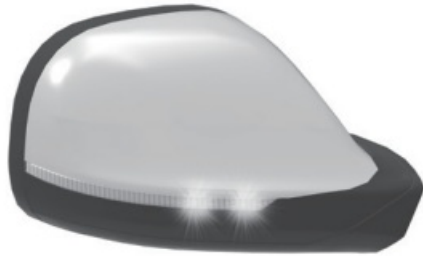



**Note:** Ensure the mark is oriented upward for correct optical distribution.

## APPROVED MOUNTING POSITION

The lightheads must be set up in a set of four units to meet ECE R65 Cat. X. (Amber, Blue, Red)  
Follow the diagram and position the lightheads within the maximum separation distance to fulfill the approval requirement.



## Application Examples

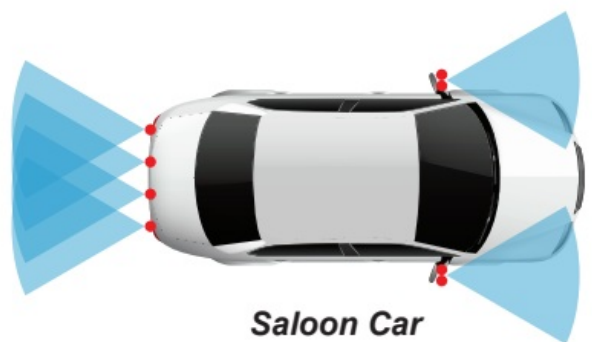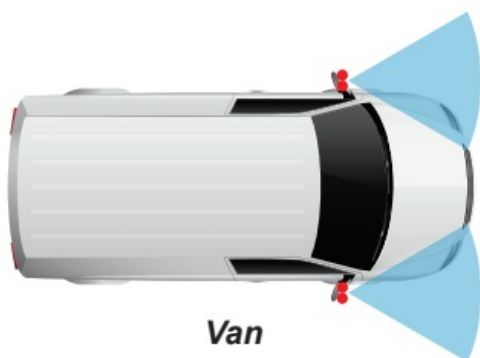

## Documents / Resources



