




COMMSCOPE TC-96365-IP Prodigy Connector User Guide

[Home](#) » [CommScope](#) » COMMSCOPE TC-96365-IP Prodigy Connector User Guide 

COMMSCOPE TC-96365-IP Prodigy Connector User Guide



Contents


- [1 Installing Female Converter on Prodigy™ Connector](#)
- [2 Removing Female Converter from Prodigy™ Connector](#)
- [3 Documents / Resources](#)

Installing Female Converter on Prodigy™ Connector


1. Remove dust cap as follows: **(a)** Rotate locking nut 45 degrees in direction shown, and **(b)** pull off dust cap

from Prodigy connector.


NOTE: Work on a clean surface, taking care to avoid dust contamination of mating surfaces.

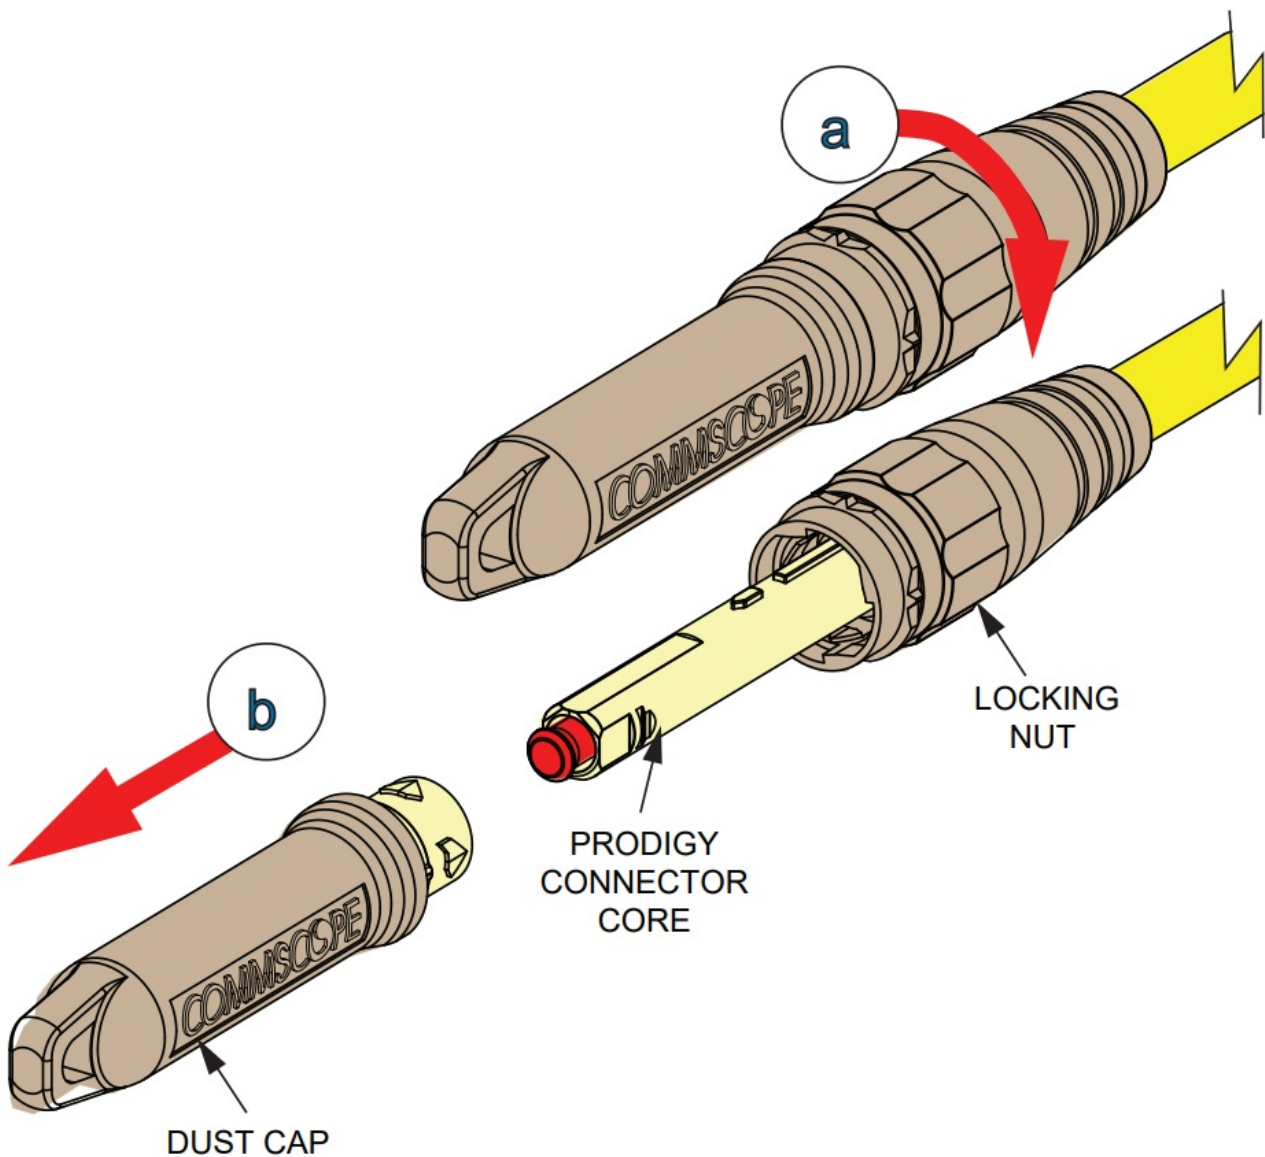

2. Install the female converter as follows: **(a)** remove the red ferrule dust cap from the Prodigy connector, **(b)** locate Prodigy female converter, (c) hold onto converter body to keep it from turning, **(d)** Roughly align the alignment key on Prodigy connector core with alignment guide in converter body; **(e)** insert the connector core all the way in.

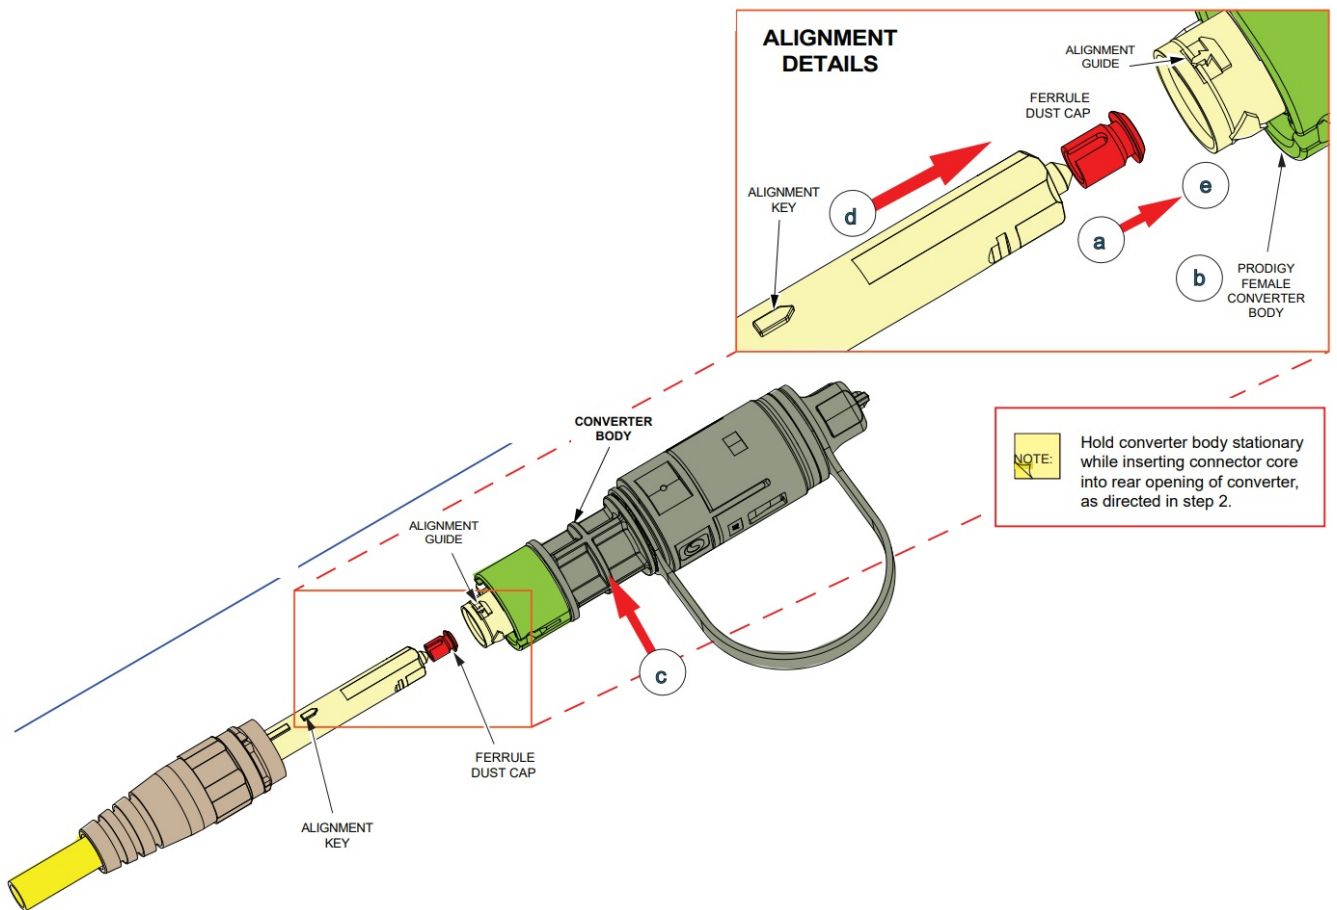

(f) turn the locking nut 45° in direction shown until it locks into position.

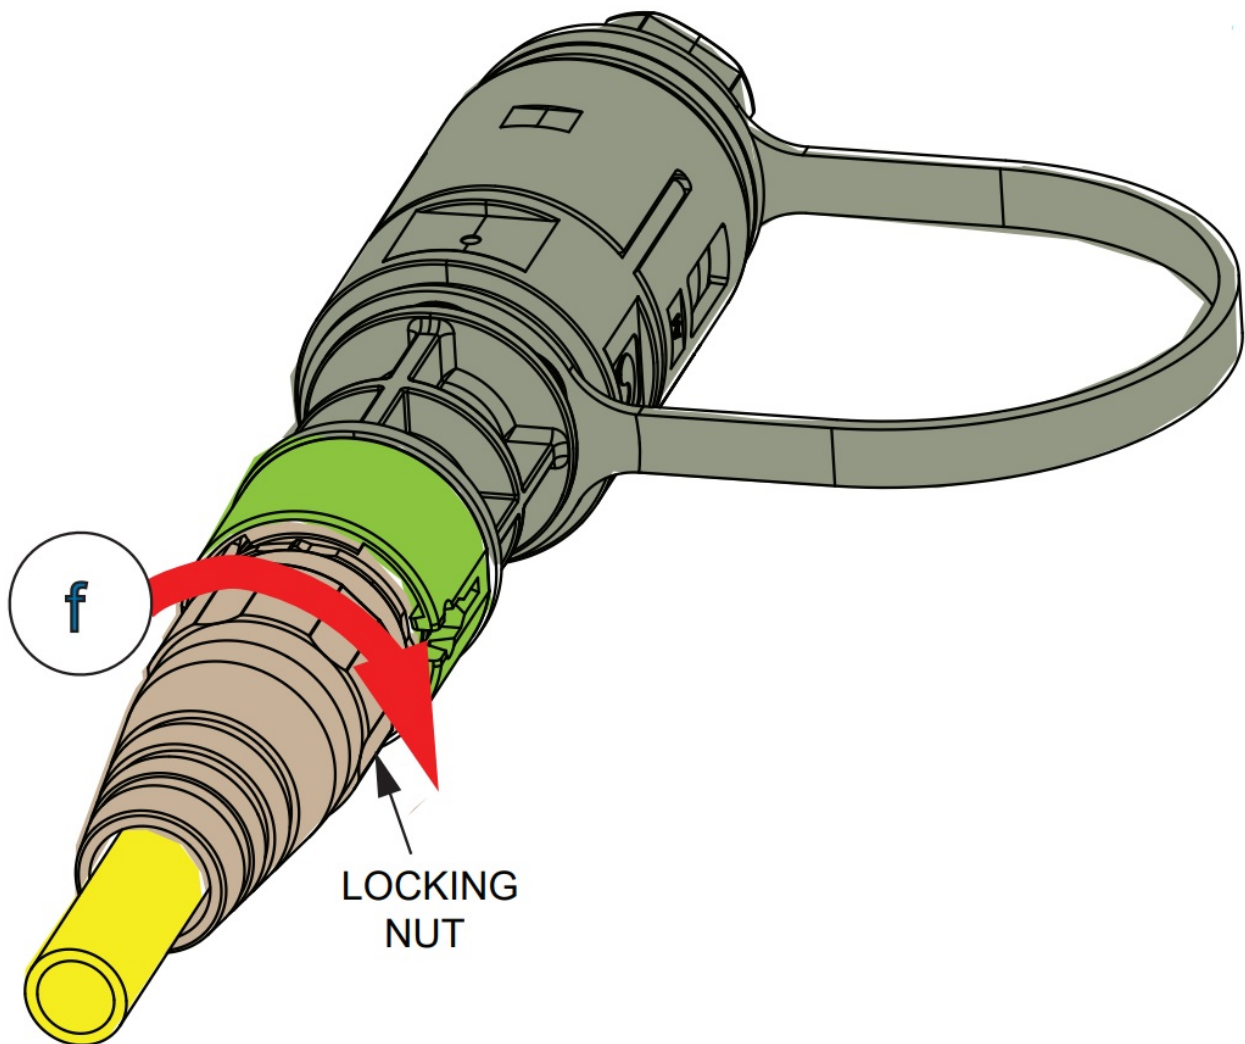

FEMALE


CONVERTER FULLY ASSRMBLED

NOTE : Colors in lustrations are muted.

Removing Female Converter from Prodigy™ Connector

1. Remove coupling nut as follows:


- (a) Insert converter dust cap flat head feature in converter coupling nut break line indicator;
- (b) twist converter dust cap $\pm 90^\circ$ in direction shown to crack the coupling nut;
- (c) if required, repeat the action at the opposite side of the coupling nut;
- (d) pull off coupling nut parts from Prodigy female converter.

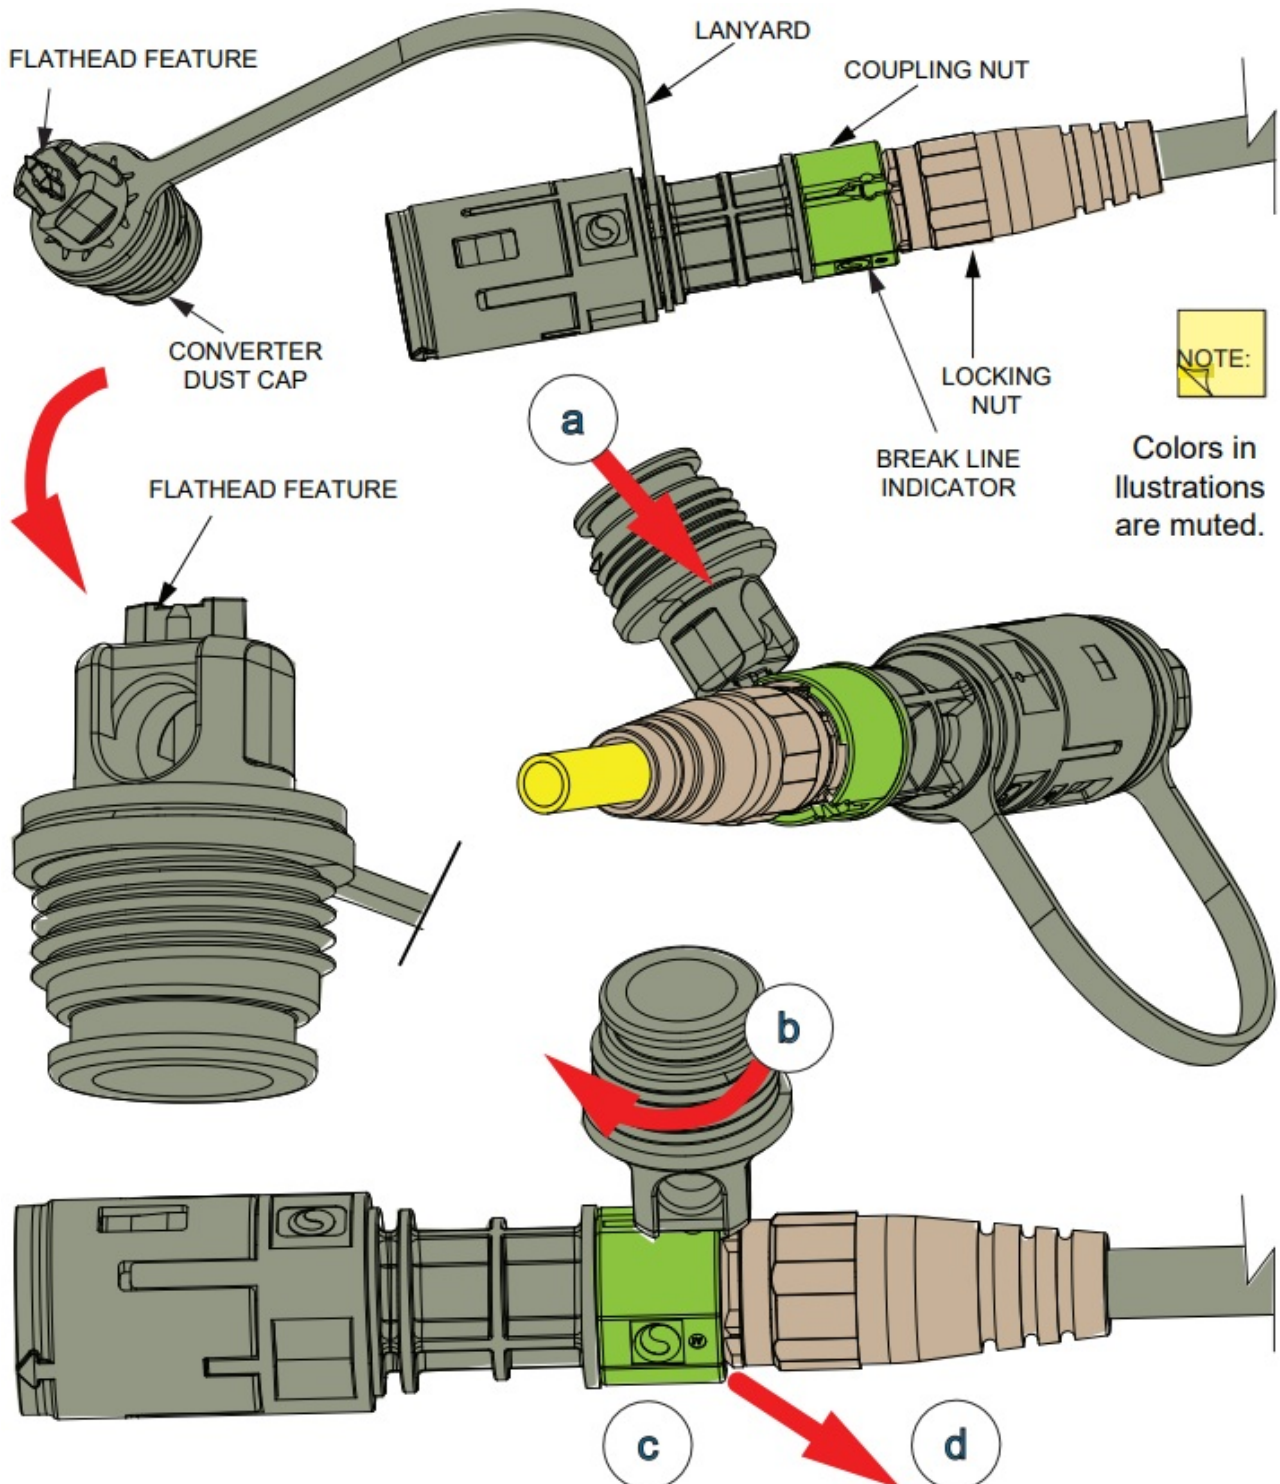

2. Remove the female converter from the Prodigy connector as follows:

- (a) Rotate locking nut 45° in direction shown to unlock the Prodigy from the Female converter;


(b) pull off converter from Prodigy connector core.

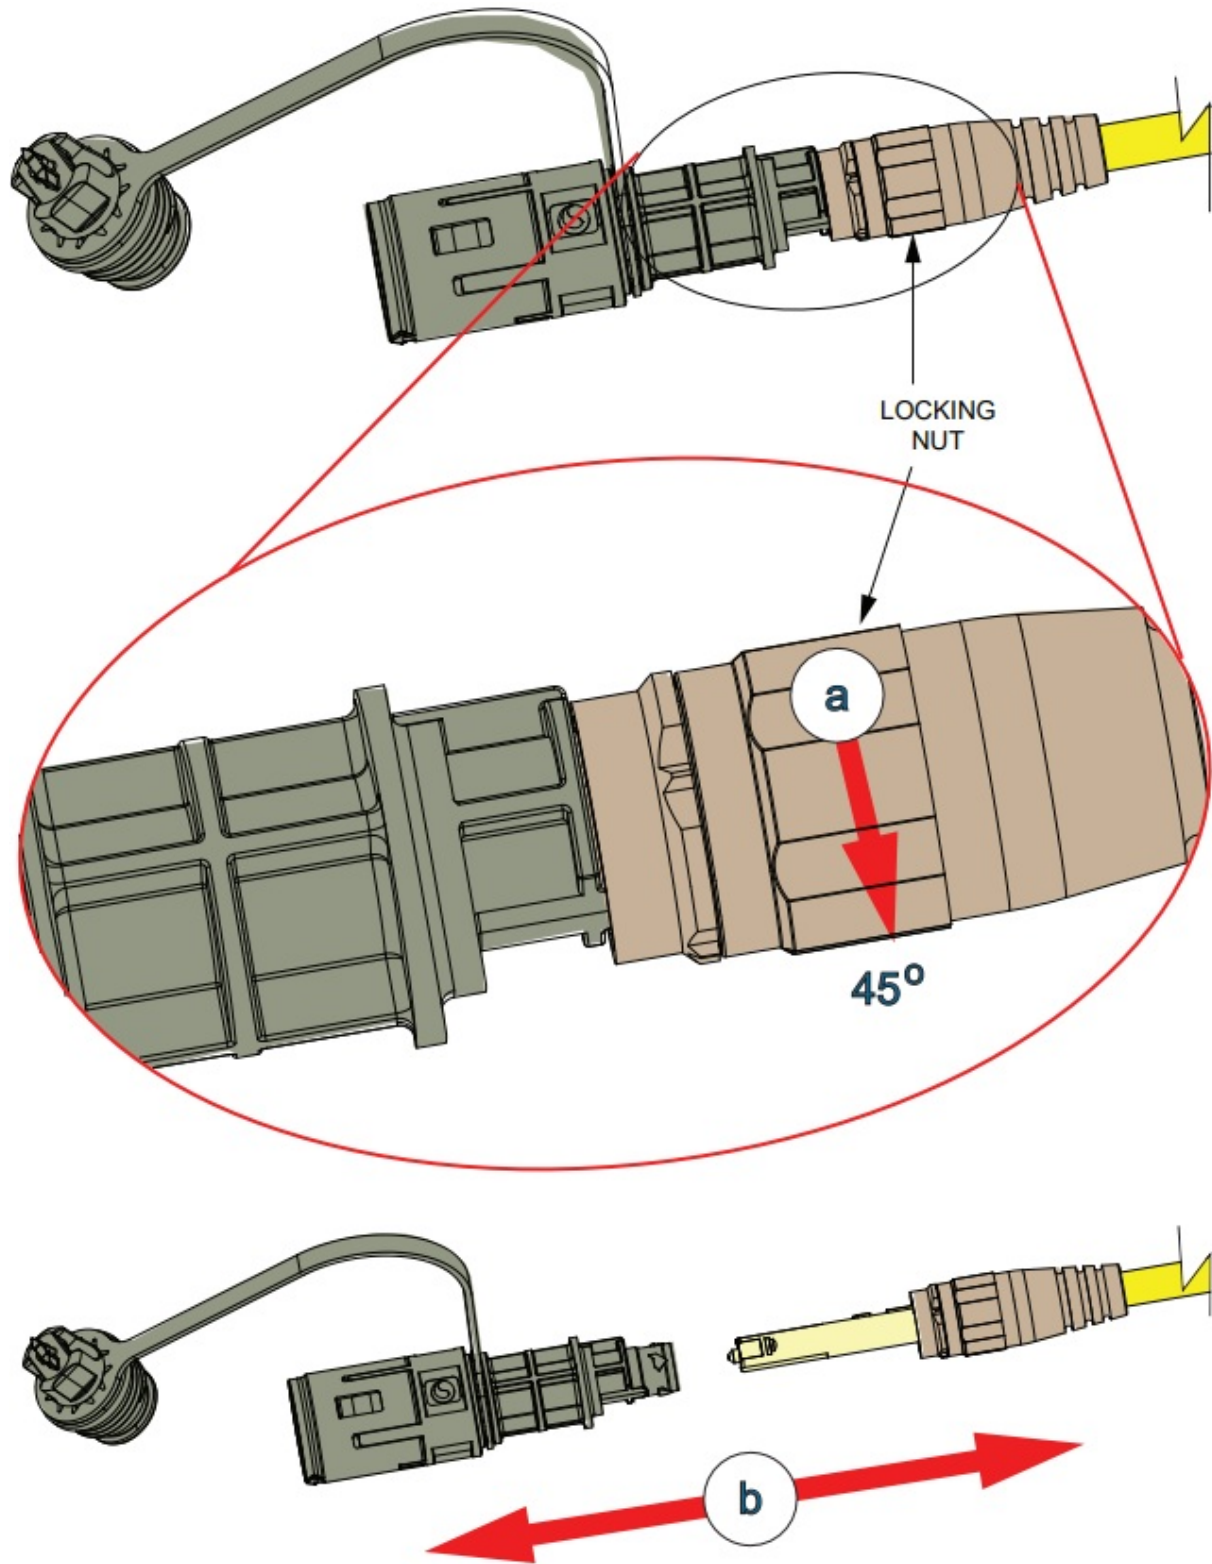

Electronic Only Document (EOD) CommScope (logo), CommScope, and Prodigy are trademarks.
© 2023, CommScope, Inc. All Rights Reserved. 28088-A

COMMSCOPE®

Documents / Resources



[COMMSCOPE TC-96365-IP Prodigy Connector](#) [pdf] User Guide
TC-96365-IP Prodigy Connector, TC-96365-IP, Prodigy Connector, Connector

Manuals+