



COMREX MAX-M Peplink Pepwave MAX Adapter User Manual

[Home](#) » [COMREX](#) » COMREX MAX-M Peplink Pepwave MAX Adapter User Manual 

COMREX MAX-M Peplink Pepwave MAX Adapter



Contents

- [1 Attaching the Modem\(s\)](#)
- [2 Installing the Bracket](#)
- [3 Connect via USB](#)
- [4 Enable in Network Manager](#)
- [5 CUSTOMER SUPPORT](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

Attaching the Modem(s)

1. **Locate the Mounting Posts:** The modem bracket contains two pairs of mounting posts, one vertical pair facing down toward the ACCESS NX and one horizontal, pair facing up away from the unit.



Figure 1 – Mounting Posts

2. **Locate the Screw Holes:** The Pepwave MAX Adapter contains four screw holes on the “underside”, where the model label can be found. One pair of these holes will align with the mounting posts on the bracket.



Figure 2 – Screw Holes

3. **Align the Modem:** Align the correct screw holes with one set of mounting posts on the modem bracket and attach the modem by tightening the screws from the other side of the bracket.



Figure 3 – Modem Position

4. **Align a 2nd Modem:** To attach a second modem, repeat the process using the remaining set of mounting posts.



Figure 4 – Second Modem

Installing the Bracket

5. **Locate the Mounting Screws:** The ACCESS NX Portable comes equipped with two accessory-mounting screws, located on the “top” metal plate, where the A/C power and Ethernet jacks can be found.

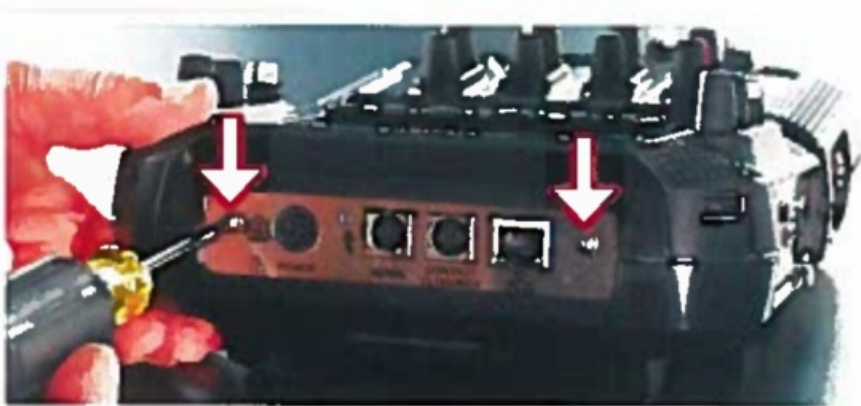


Figure 5 – Mounting Screws

6. **Secure the Bracket In Place:** Remove the two screws and use them to attach the modem bracket to the ACCESS NX Portable. The bracket’s longest side should rise “forward”, past the LCD touchscreen.

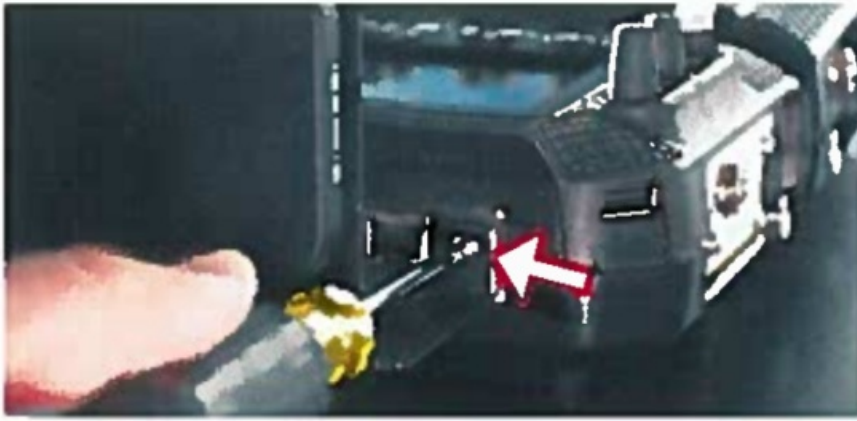


Figure 6 – Bracket Position

Connect via USB

7. **Identify the Left and Right USB Cables:** The modem bracket comes with two different USB cables. One cable is oriented toward the ACCESS NX's '**Right**' USB port, and the other is oriented for the '**Left**' USB port.

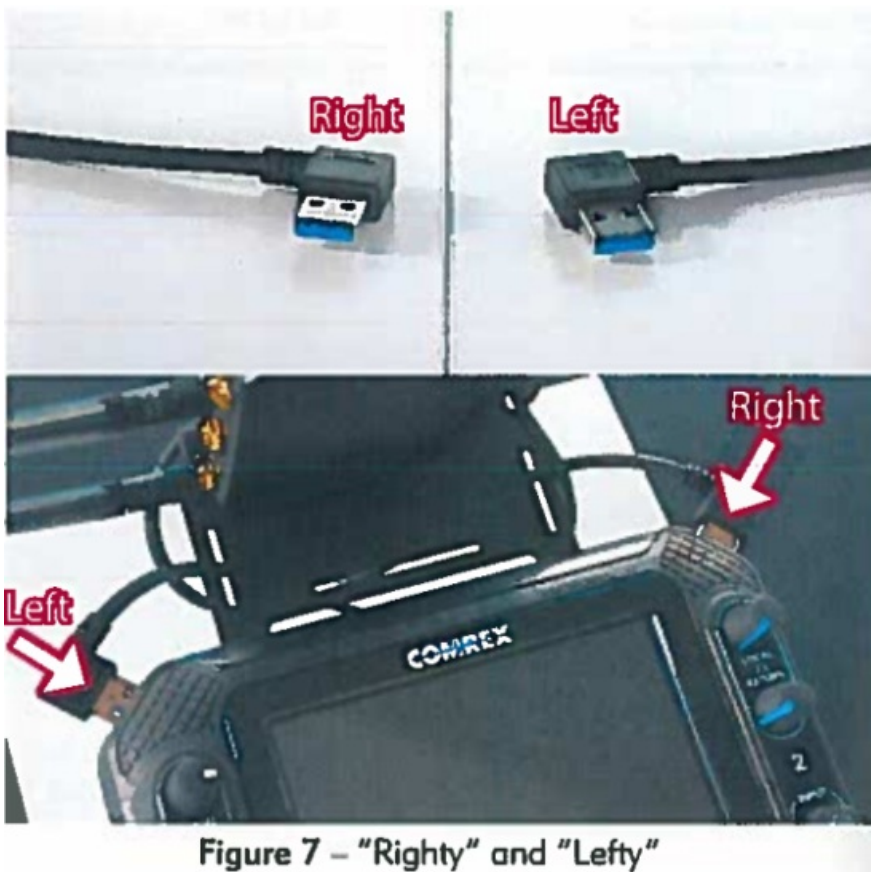


Figure 7 – "Righty" and "Lefty"

8. **Connect the Cable(s):** Connect the smaller USB-C side into the Pepwave MAX Adapter, then connect the larger USB A side into the appropriate USB port on the ACCESS NX Portable.

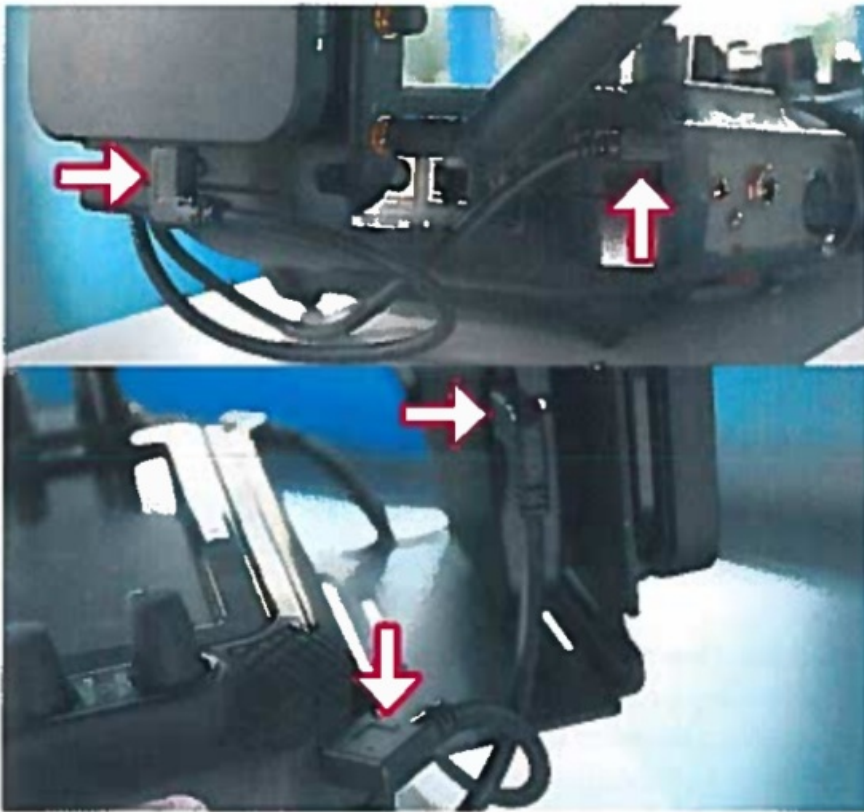


Figure 8 – USBs Plugged

Enable in Network Manager

9. **Open the Network Manager:** Open the ACCESS NX Portable's Network Manager by pressing the 3-line menu button in the upper left corner of the touchscreen and choosing "Network Manager".

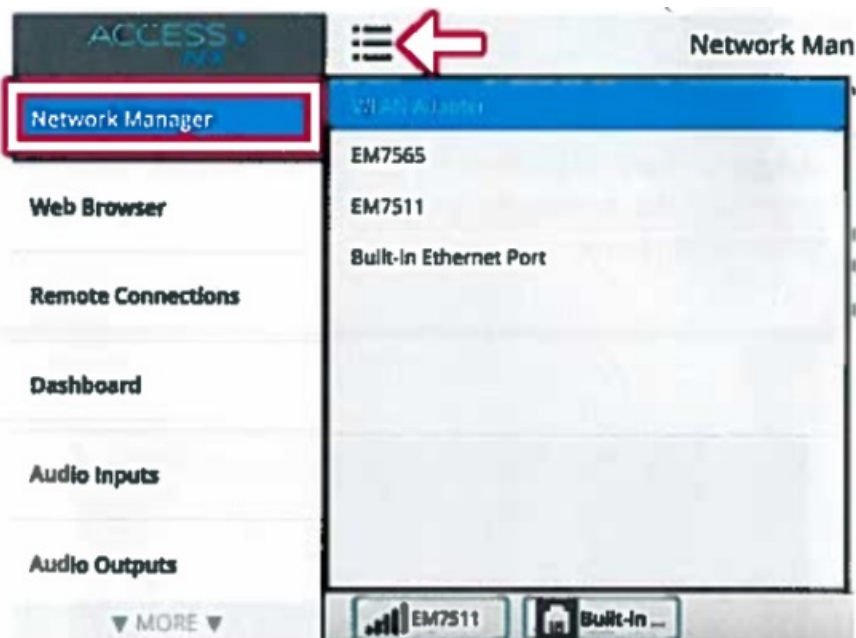


Figure 9 – Network Manager

10. **Enable the Installed Modem(s):** Find the Pepwave MAX Adapter in the network device list on the left side of the screen and select it to open more details on the right side. Ensure that the modem is listed as "Installed and enabled". Tap the "Enable" button below if needed.

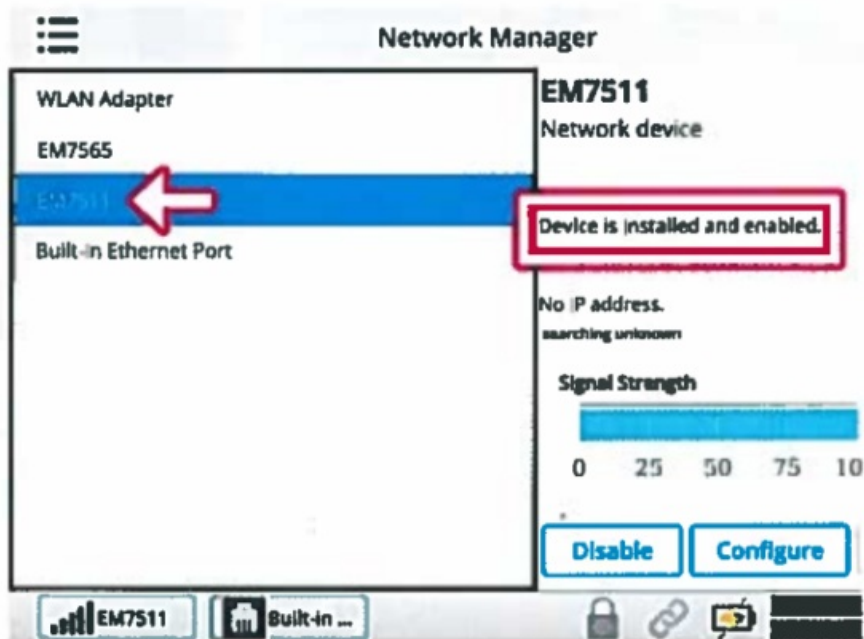


Figure 10 – Enable Device

CUSTOMER SUPPORT

Toll Free in USA: 800-237-1776_ www.comrex.com

e-mail: info@comrex.com

19 Pine Road, Devens, MA 01434 USA

Tel: +1-[978-784-1776](tel:978-784-1776) • Fax: +1-[978-784-1717](tel:978-784-1717)



Documents / Resources



[COMREX MAX-M Peplink Pepwave MAX Adapter](#) [pdf] User Manual

MAX-M Peplink Pepwave MAX Adapter, MAX-M, Peplink Pepwave MAX Adapter, MAX Adapter, Adapter

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.