



PORTABLE AIR CONDITIONER

up to 500 sq.ft.

Model: AP-14DR2SFTS10



- Precise Temperature Control with I-Feel
- Cooling, Fan, and Dehumidifier functions
- · Remote Control is included



Convenient Dual Display

A second, front-facing Temperature display is easy to read, even from across the room.



I-FEEL Remote Control

The I-FEEL temperature sensor built into the remote control senses its surrounding temperature, and transmits the signal back to the unit, providing maximum comfort.



Warranty

2 Years Parts & Labor.






PORTABLE AIR CONDITIONER

up to 500 sq.ft.


TECHNICAL SPECIFIC	ATIONS
Performance	
Hisense-Model	AP-14DR2SFTS10
Cooling Capacity (BTU)	14,000 BTU
Heating Capacity	N/A
Maximum Cooling space	500 sq. ft.
Refrigerant	R-410A
Noise Level in dB(A)	51 ~ 53 dB(A)
Electrical	
Voltage / Freq / Amps	115V/60Hz / 11.8A
Control Features	
Unit Control Type	Electronic
Fan Control	Button
Thermostat Control	16 ~ 30 °C
Display Type	Dual LED
Sleep Mode	Yes (on remote)
Dry Mode	Yes
Smart Mode	Yes (on remote)
Cooling Speeds	3 speeds
Temp Display Units	°C/°F
Clock	Yes (on remote)
Timer	24 Hr
Auto Restart	Yes
General Features	
Removable Filter	Yes
Washable PP Filter	Yes
Motorized Air Swing	Yes (on remote)
Vent System	Single Hose, 5.9"D x 59"L
Dehumidification	3.23 Pints / hr
Airflow (CFM)	204 - 278
Accessories	
Remote Control	Yes
AA Batteries	Yes - included
Air Hose	Yes
Window Kit	Yes
Approvals	
Safety	ETL
Parcel Shippable	No
Shipping	
Unit Dimension WxDxH (mm)	443x375x750

Carton Dimension WxDXH (mm)	500x425x890
Net Weight /Gross Weight (Kg)	36.9/39.8
Unit Dimension WxDxH (inch)	17.5x14.8x29.5
Carton Dimension WxDXH (inch)	19.6x16.8x35.0
Net Weight /Gross Weight (lbs)	81.3/88.4
Loading(40HQ)	374
Loading (53')	312 (floor loaded)
Warranty/UPC	
Parts & Labor	2 years
UPC	819130025780

Dual Display

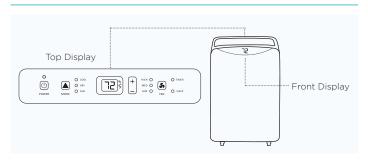

Window Size

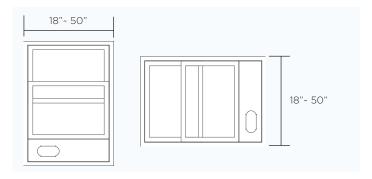

The window installation kit allows you to install the air conditioner in most vertical-sliding windows 18" to 50" wide, or horizontal-sliding windows from 18" to 50" high.

