



## **dahua Dome Network Camera Application User Guide**

[Home](#) » [Dahua](#) » dahua Dome Network Camera Application User Guide 

**dahua Dome Network Camera Application**



## Contents

### [1 Operating with DMSS](#)

### [2 Installation](#)

#### [2.1 Packing List](#)

#### [2.2 Dimensions](#)

#### [2.3 Installing Camera](#)

##### [2.3.1 Installation Method](#)

##### [2.3.2 Installing SD Card](#)

##### [2.3.3 Attaching Camera](#)

##### [2.3.4 \(Optional\) Installing Waterproof Connector](#)

##### [2.3.5 Adjusting Lens Angle](#)

### [3 Documents / Resources](#)

### [4 Related Posts](#)

## Operating with DMSS




**Make sure that there are no obstacles and electromagnetic interference between the device and the router for best possible wireless performance.**

**Step 1** Add the device.

- 1) Tap + button on the upper-right corner of the DMSS home page to scan the QR code on the camera. If your DMSS fails to scan the QR code, tap Manually enter SN.
- 2) Select **Wireless Camera**.

Figure 1-1 Add the device

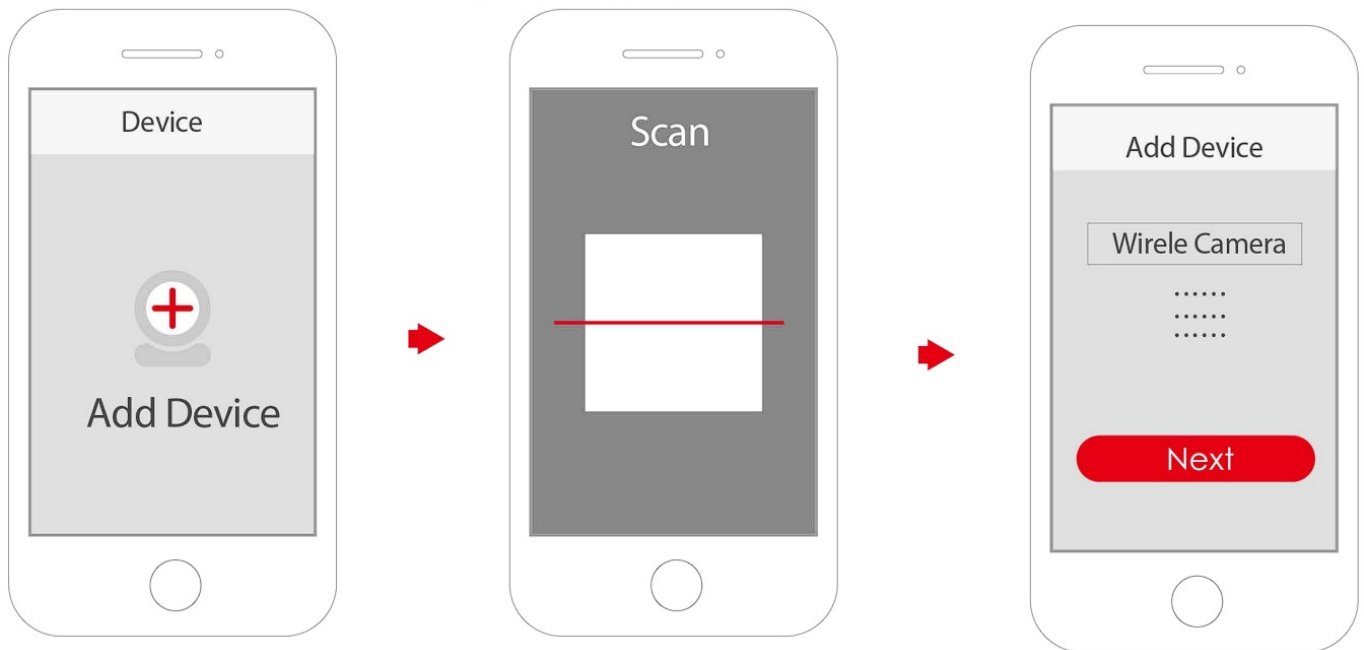

**Step 2** Configure the device hotspot.



**If you connect the device with Ethernet cable, please jump to Step4 directly.**

- 1) Make sure that the device is connected to power and enables device hotspot, and then click **Next**.
- 2) Go to Wi-Fi settings of your mobile phone, and then connect hotspot named DAPxxxxxxx.
- 3) Create the username and password for the device and then tap **Next**.

Figure 1-2 Configure the device hotspot



**Step 3** Configure the Wi-Fi.

Select your Wi-Fi network from SSID list and then enter the password.

**Step 4** Configure the device information.

- 1) Create the device name and password.
- 2) Set the time zone and then click Done.

Figure 1-3 Configure the device information













**Installation**

**Packing List**




- The tool required for the installation such as electric drill is not provided in the package.
- The operation manual and related tool information are contained in the disk or the QR code.

Figure 2-1 Packaging list

Network Camera × 1	Manual × 2	Adapter × 1	Waterproof Connector × 1
			
Screw Package × 1	CD-ROM/QR Code × 1	Positioning Map × 1	Antenna × 1
			
Gasket × 1	Wrench × 1		
			

## Dimensions

Figure 2-2 Dimensions (mm [inch])

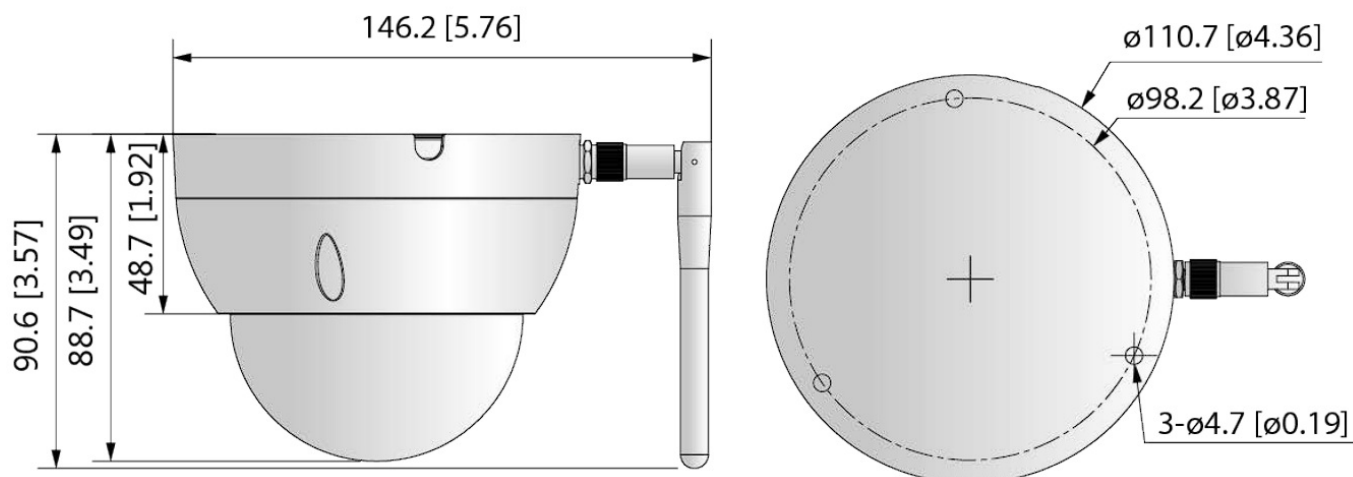

## Installing Camera

### Installation Method

## Figure 2-3 Installation method




### Installing SD Card

- SD card slot is available on select models.
- Disconnect the power before installing or removing the SD card.
- Do not open the cover for a long time to avoid spray in cameras.



**Press the reset button for 10 seconds to reset the device.**

## Figure 2-4 Install SD card

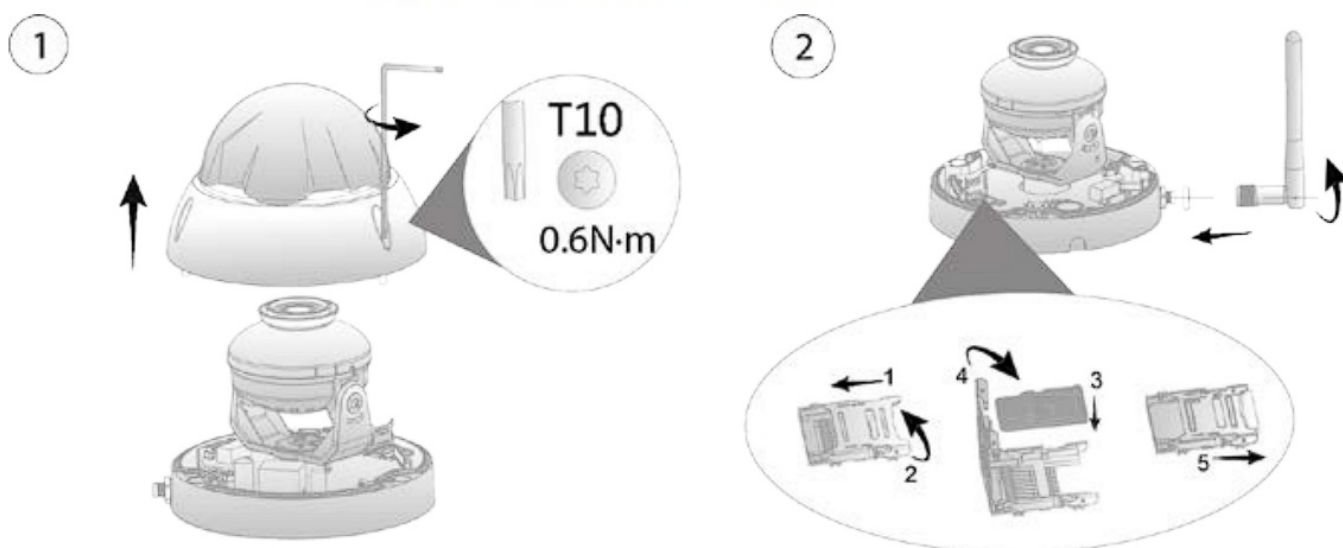


### Attaching Camera




- **Make sure that the mounting surface is strong enough to hold at least three times the weight of the camera and bracket.**
- **Remove the protective film after finishing installation.**

Figure 2-5 Cable going through the side cable tray

①

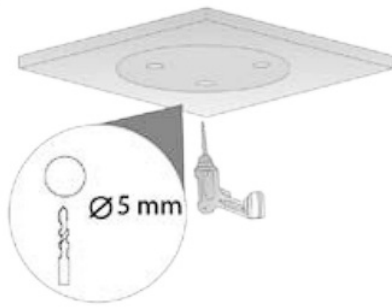

②

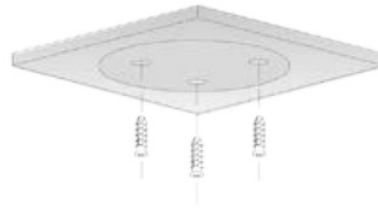


③



④



Figure 2-6 Cable going through the mounting surface

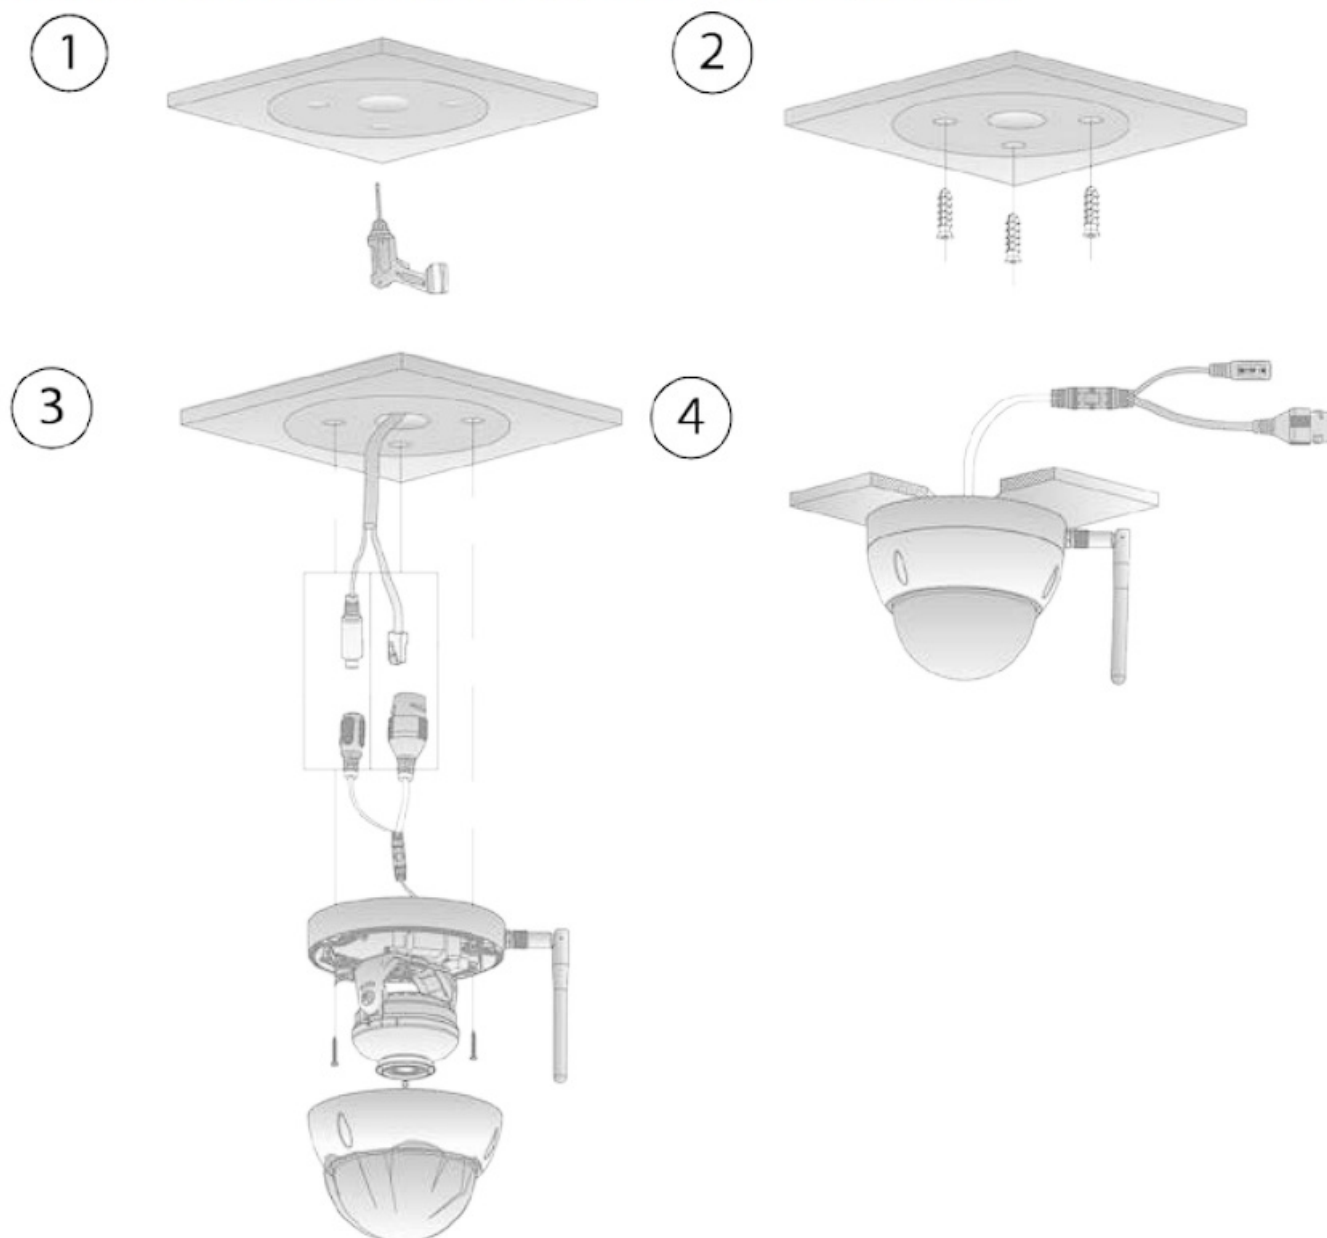


(Optional) Installing Waterproof Connector



This part is needed only when a waterproof connector comes with the camera and the camera is used outdoors.




Figure 2-7 Install waterproof connector

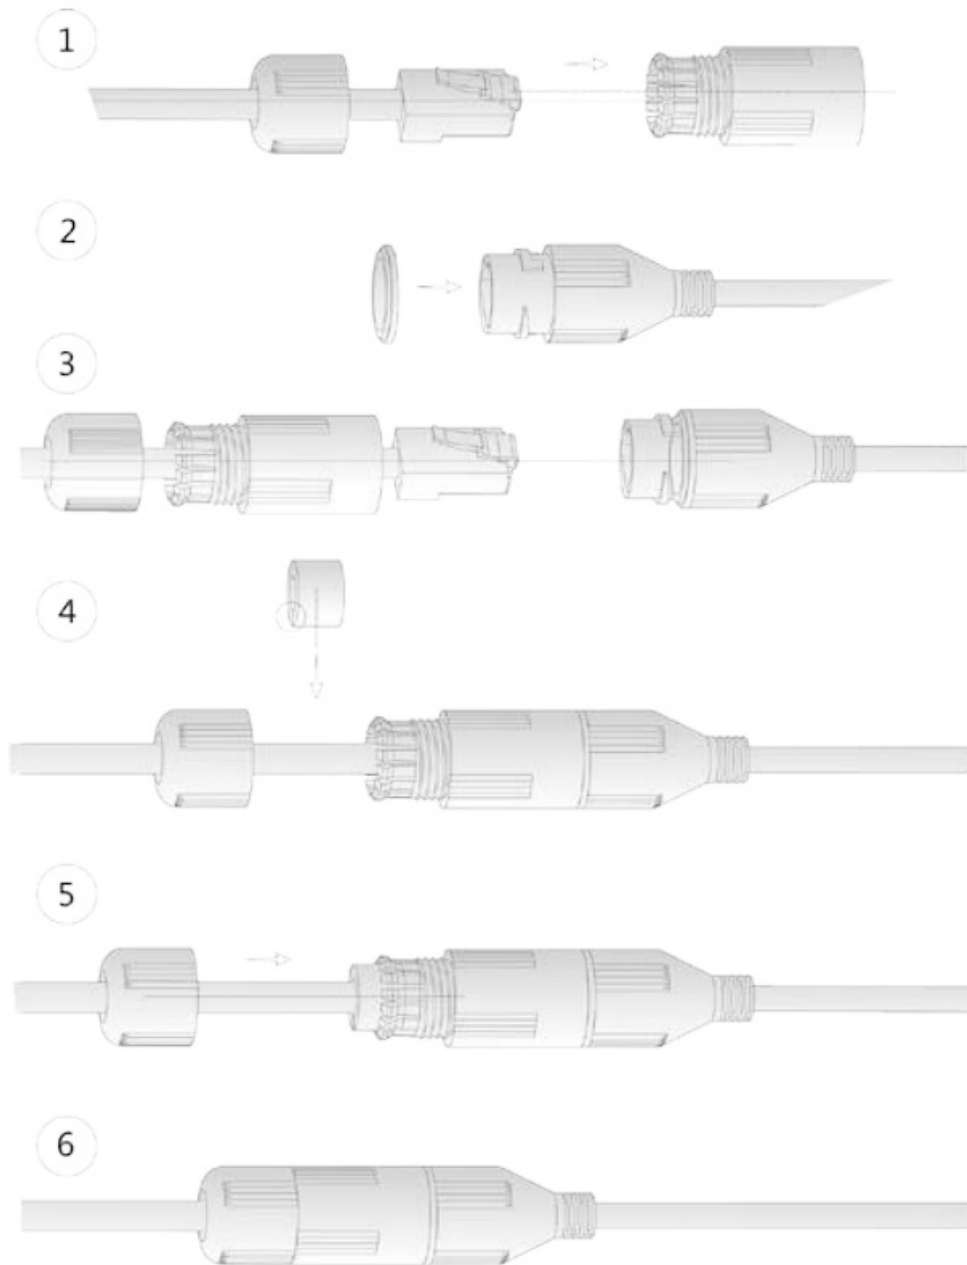

Adjusting Lens Angle

Figure 2-8 Adjust lens angle

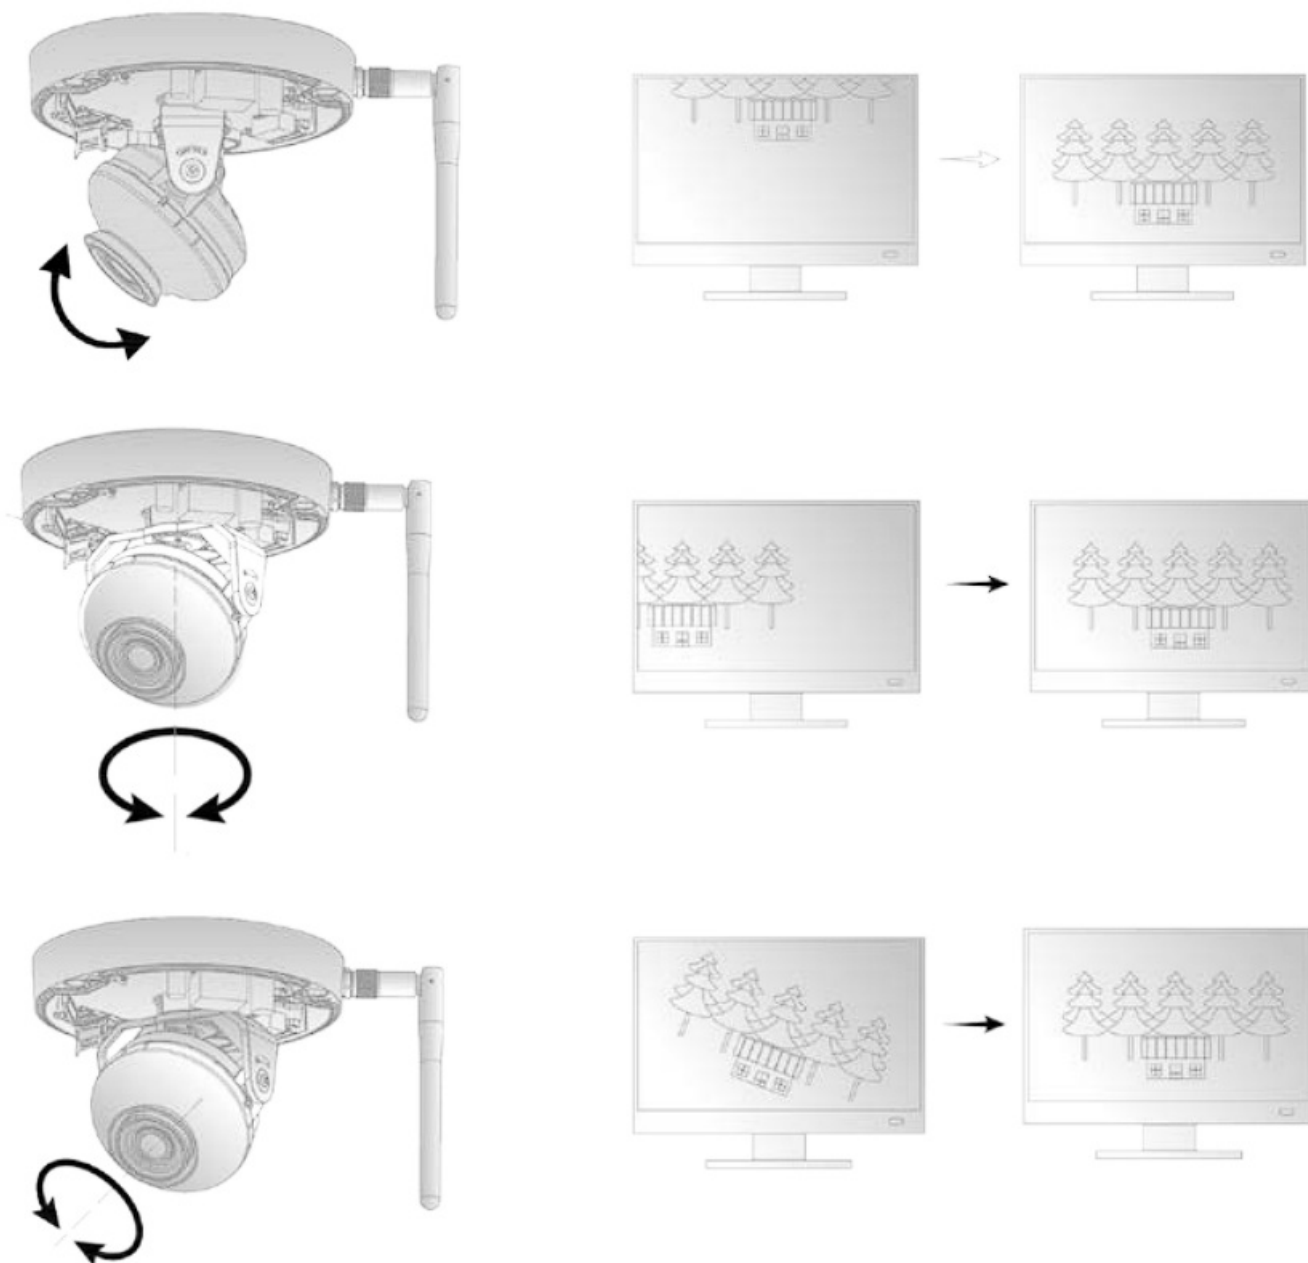

ENABLING A SAFER SOCIETY AND SMARTER LIVING



**ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.**

Address: No.1199 Bin'an Road, Binjiang District, Hangzhou, P. R. China | Website: [www.dahuasecurity.com](http://www.dahuasecurity.com) |

Postcode: 310053

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com) | Fax: +86-571-87688815 | Tel: +86-571-87688883



<div data-bbox="148 114 185 132"></div> <div data-bbox="148 150 218 174"><p>Dome Network Camera Application Quick Start Guide</p></div> <div data-bbox="148 185 292 257"></div> <div data-bbox="148 291 229 300"><p>DONGSHI DONGSHI TECHNOLOGY CO., LTD.</p></div> <div data-bbox="261 291 271 300"><p>01/17</p></div>	<div data-bbox="317 174 1380 244"><p><a href="#">dahua Dome Network Camera Application</a> [pdf] User Guide Dome Network Camera Application, Dome Network Camera, Network Camera, Camera</p></div>
--	--