Sound Control Technologies

RC-SDA5+UNI™ Application Guide

Updated: 01/24/2024

Shown: Sony SRG-X120

The RC-SDA5+UNI™ Supports Mutiple Cameras. Please Reference the SCT Solution Finder

RC-SDA5+HE™

3rd Party
RS232 Controller

RC5-CE™

Host PC

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

PPC-004-0.4M
DC Power Cable

RCC-C002-0.3M
RJ45 to RJ45
UTP Control Cable

RCC-C001-0.3M
HDMI to HDMI
Video Cable

RCC-M005-1.0M
USB-A to USB-C

RCC-M003-1.0M
USB-A to USB-A

SCTLink™ Cable
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

SCTLink™ Cable Specs
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)

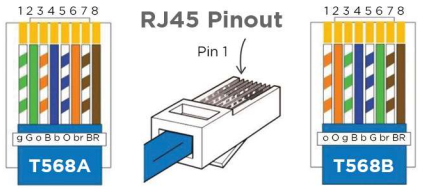

RCC-H016-1.0M
RJ45 to RJ45
UTP Control Cable

Sony RM-IP10 or Generic Controller

HDMI Device

RCC-H001-1.0M
HDMI to HDMI
Video Cable

Module Dimensions
RC5-CE™: H: 0.93" (23mm) **x W:** 2.5" (63mm) **x D:** 3.741" (95mm)
RC-SDA5+HE™: H: 1.28" (33mm) **x W:** 9.47" (241m) **x D:** 4.88" (124mm)