



DELUX GM903 Ergonomic Keyboard User Manual


[Home](#) » [DELUX](#) » DELUX GM903 Ergonomic Keyboard User Manual 



User Manual
GM903
ERGONOMIC KEYBOARD



Thank you for choosing this keyboard. Please read the user manual carefully before using this product.

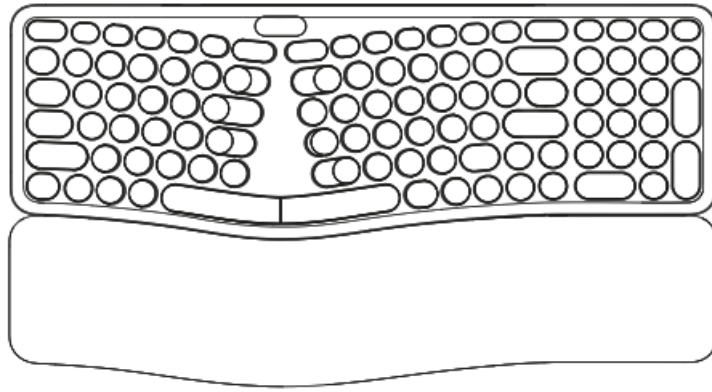

Contents

- [1 Compatibility](#)
- [2 Documents / Resources](#)
- [3 Related Posts](#)

Compatibility

Compatible with Windows/Mac OS.

Keyboard Usage

1. Connection



This ergonomic keyboard can connect with 2.4G and two Bluetooth 5.0 devices at the same time. You can switch the connection modes circularly by the mode button.

2. Mode switch





Press the mode button to switch between 2.4G-BT1-BT2, now the display screen shows the current mode state 2.4G/BT1/BT2.

3. How to code


► 2.4G mode

The first switch to 2.4G mode, then hold down the mode button for 2S to code (20S code matching time), now the screen shows 2.4G disconnection icon,  next release the mode button, insert the receiver to the computer USB port to code(30CM code matching distance), after the coding is finished properly the icon will show as  now the keyboard can work normally.

► Bluetooth mode

First switch to Bluetooth mode, then hold down the mode button for 2S to code(2 minutes code matching time), now the screen shows a Bluetooth disconnection icon , or  next release the mode button, "Delux-GM903" can be searched for(outdated systems including WIN7 NOT available), click "Delux-GM903" to code, after the coding is finished properly the icon will show as  or .

4. Display screen

- Battery capacity: battery voltage between 3.0V-4.0V shows battery capacity between 0%-100% (the data is for reference only).
- The screen shows  during charging and will disappear when fully charged.
- Connection Mode:2.4G/BT1/BT2.
- Coding state: disconnection icon during the coding state, and connection icon when finishing coding.
- Button icon: NUM LOCK, CAP LOCK, FN, MAC/WIN.

5. Charging reminding

This keyboard is with a built-in 1100mAH Li-on battery and a charging temperature of 0-45 C.

Low voltage warning: when the battery capacity is lower than 20%(now the battery voltage is lower than













3.3V±0.1V), the keyboard backlight will flash twice every 10S to indicate the user to charge the keyboard in time. When the battery capacity is lower than 10/0(now the battery voltage is lower than 3.0V±0.1V), the keyboard will be off and stop working.

Button function

Standard button+mode switch keys+wireless/wired version switch keys+multimedia keys.

Multimedia function

This keyboard is set as a Multimedia function(default), and F3/F4 is designed for the Apple system. Press FN+ESC to open FN, and now the screen shows, when F1-F12 is working. Press FN+ESC to close FN, now the icon will disappear, and back to the multimedia function.

F1		Brightness-	F2	
F3		Multi-window	F4	
F5		Desktop	F6	
F7		Previous track	F8	
F9		Next track	F10	
F11		Volume-	F12	

8. Keyboard version function

This keyboard is set as MAC before factory and this screen shows the **Mac** icon. The screen will show the icon **Win** when switching the version new the keyboard is with WIN function

Numlock & uppercase/lowercase

The screen will show when switching **1** on Numlock and will disappear when switching off. The screen will show **A** when switching on uppercase/lowercase and will disappear when switch off.


10. Backlight switch(only applicable for keyboard with backlight)

FN+WIN(at right) to switch on/off the backlightFN+↓↑to adjust the brightness with 4gears.

11. Working distance:10M



Documents / Resources

	DELUX GM903 Ergonomic Keyboard [pdf] User Manual GM903, Ergonomic Keyboard, GM903 Ergonomic Keyboard, Keyboard
---	---

