



## **DS18 SLG-WFCC8LD Polaris Slingshot Waterfall Center Console Speaker Pod Owner's Manual**

[Home](#) » [DS18](#) » DS18 SLG-WFCC8LD Polaris Slingshot Waterfall Center Console Speaker Pod Owner's Manual



**HYDRO**

**SLG-WFCC8LD Polaris Slingshot Waterfall Center Console Speaker Pod  
Owner's Manual**




**OWNER'S MANUAL  
SLG-WFCC8LD  
POLARIS SLINGSHOT WATERFALL CENTER CONSOLE  
SPEAKER POD WITH NXL-8BK & PRO-TW1L INCLUDED**

**Contents**

- 1 SLG-WFCC8LD Polaris Slingshot Waterfall Center Console Speaker Pod**
- 2 INTRODUCTION**
- 3 FEATURES**
- 4 WHAT'S IN THE BOX**
- 5 INSTALLATION**
- 6 CONNECTION OPTIONS**
- 7 TWEETER SPECIFICATIONS**
- 8 MEASUREMENTS**
- 9 Documents / Resources**
  - 9.1 References**

**SLG-WFCC8LD Polaris Slingshot Waterfall Center Console Speaker Pod**

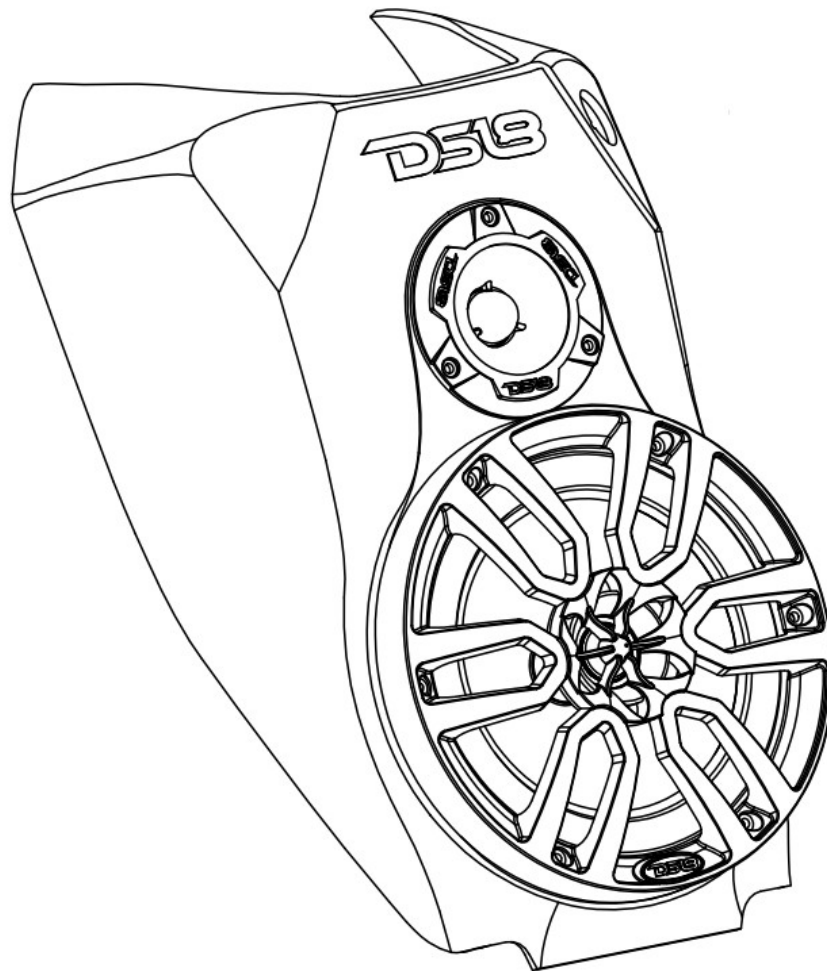

△▲ FOR ALL ELEMENTS ≡

### **SLG-WFCC8LD**

POLARIS SLINGSHOT WATERFALL CENTER CONSOLE SPEAKER POD WITH NXL-8BK & PRO-TW1L INCLUDED

### **INTRODUCTION**

If you're looking to maximize sound in your Polaris Slingshot, you may consider adding this durable Polyethylene Waterfall Center Console pod by DS18. This pod includes one 8" Waterproof Speaker with RGB LED lights (NXL-8BK) and one 3.8" Super bullet tweeter with RGB LED lights (PRO-TW1L) that your stereo system deserves. This pod comes with a black textured finish to match the factory's look. Very easy to Install using supplied bolts that fits directly into place.

### **FEATURES**

- Easy to Install – All Hardware and Wiring Included.


- OFC Tinned Wiring for More Power Handling and Durability.
- 6 core 0.6M Input Wires for RGB Lighting and Speakers.
- Fits only on 2015-2019 Slingshot
- Includes an 8" NXL-8BK Waterproof Speaker with RGB LED Lights.
- Includes a 3.8" PRO-TW1L Super Bullet Tweeter with RGB LED Lights.
- Durable (PE) Waterproof Panel with UV Protection.
- Black OEM Finish

## WHAT'S IN THE BOX


- One Pod with NXL-8BK and PRO-TW1L included.
- Speaker Wiring.
- Screws and washers.

## INSTALLATION


Remove the factory 12V port pushing down the clips and disconnect it, also remove the cup holder to gain more room and seat properly. (Picture 1)

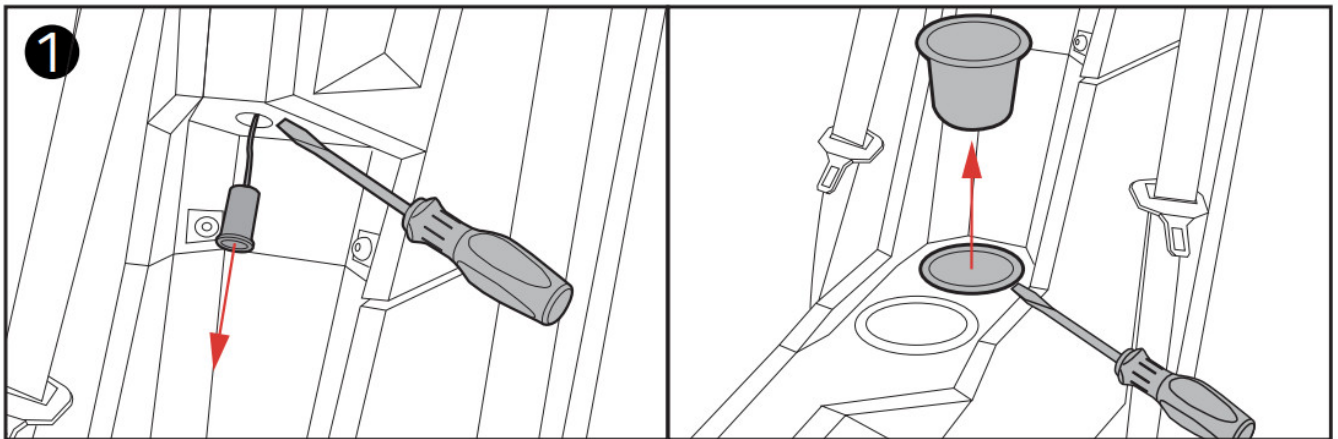

Place the pod in place and mark the holes to open at the sides, use a drill with a 1/8" bit and open the holes for the screws. (Picture 2)

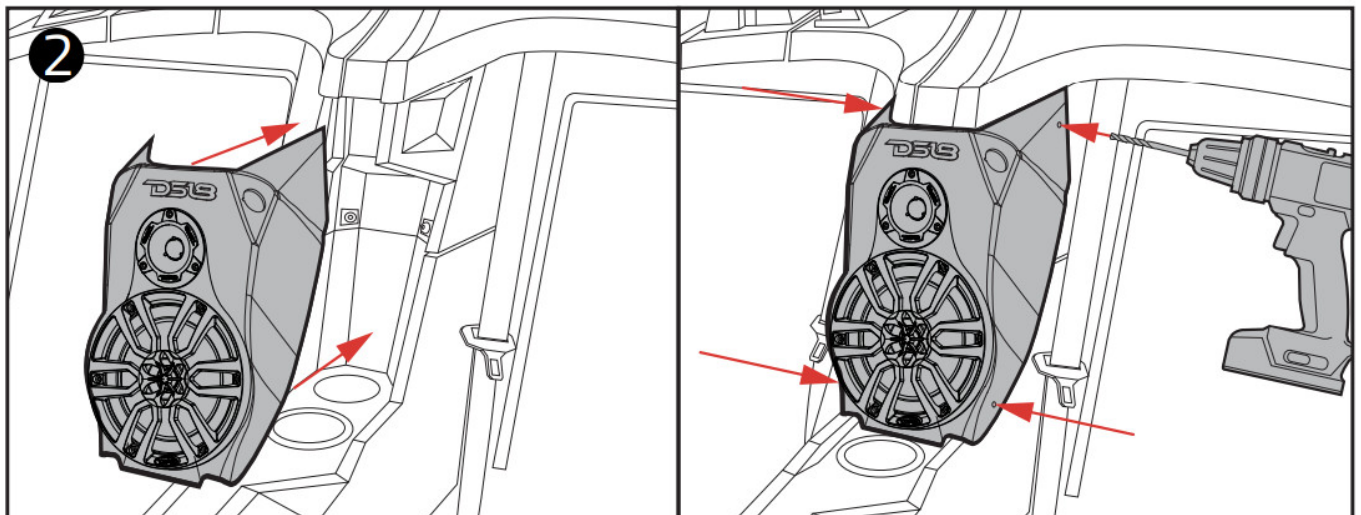

Then secure the pod (Picture 4) and reconnect the 12V port in the new hole position and re-connect it. (Picture 3)

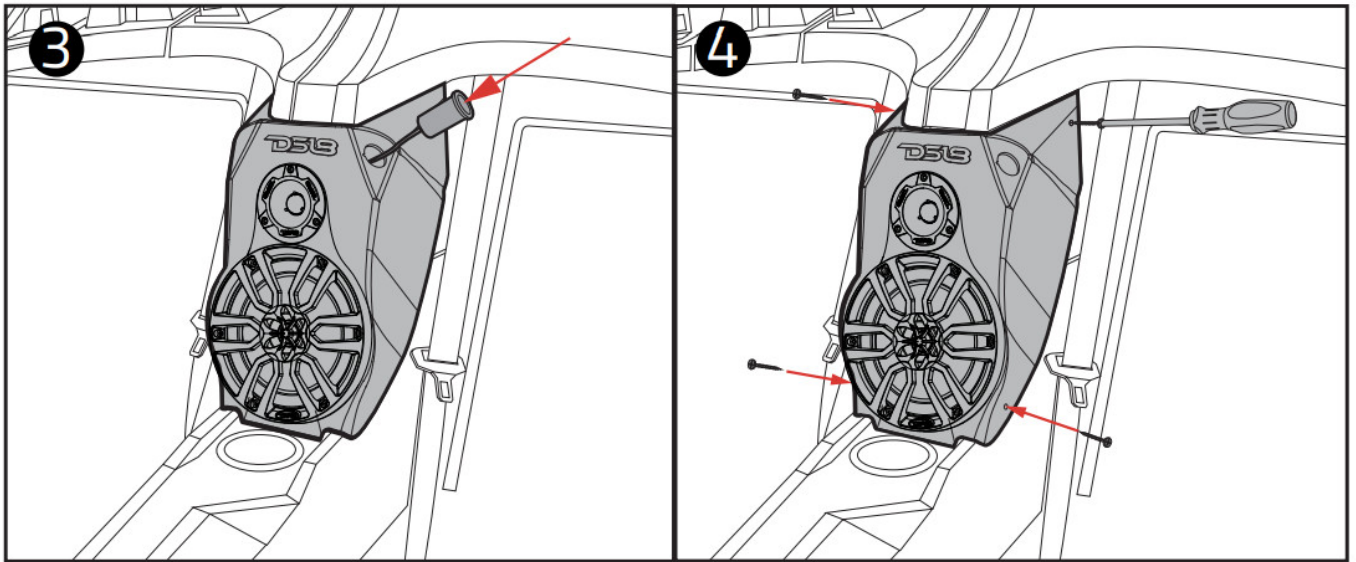


This kit needs an aftermarket amp pre-installed with the speaker wires in this location, only after this step can you install the speakers using the aftermarket amp's speaker wire and RGB LED wires (optional) of the LED module (LED – BTC not included). (Picture 6)

This concludes the installation of the SLG-WFCC8LD and it is ready to enjoy your new sound system upgrade!

## CONNECTION OPTIONS

1. If you have an LED Control Module (LED-BTC), Connect as Shown in the Following Diagram:

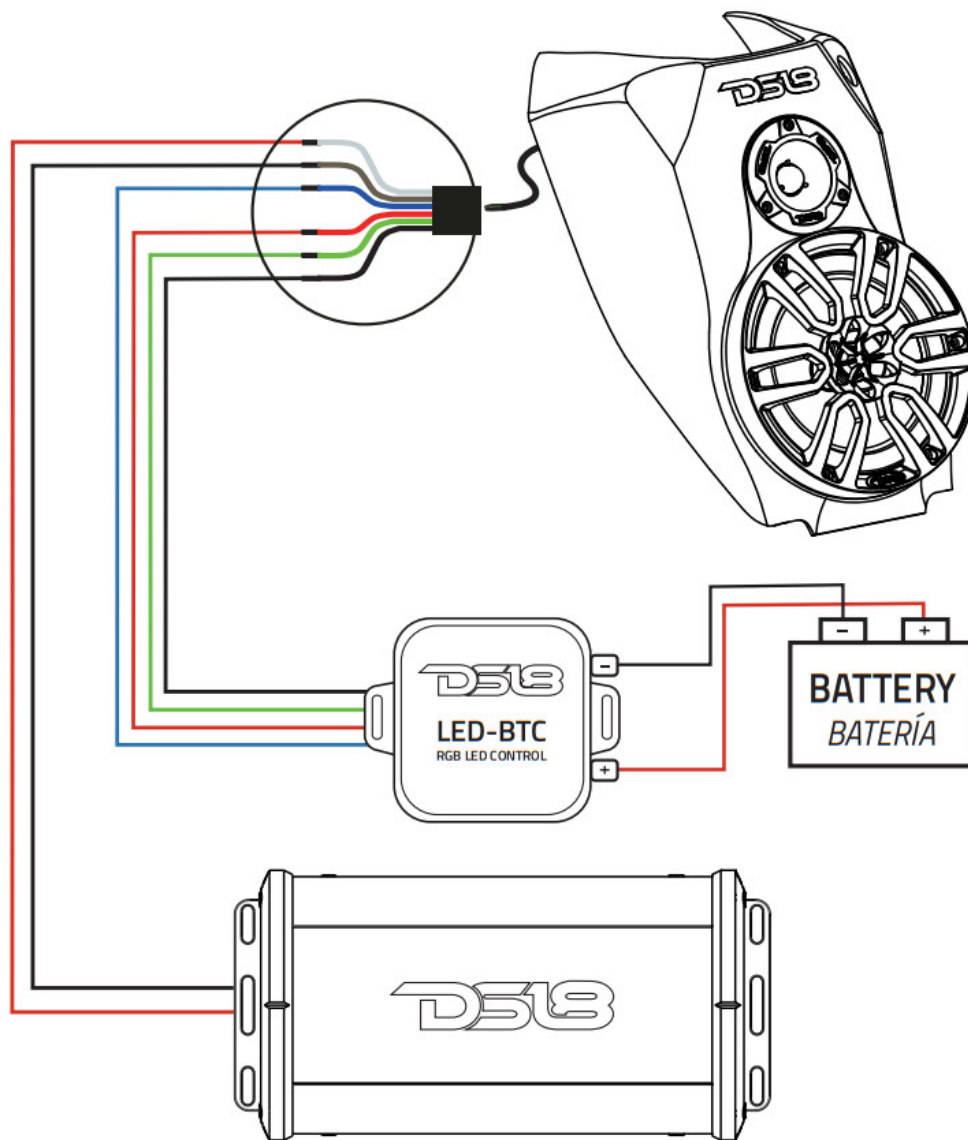

Blue LED (-)

Black 12V DC (+)

Red LED (-)

White Speaker (+)

Green LED (-)

Grey Speaker (-)


## CONNECTION OPTIONS

2. To connect without LED Control Module (LED-BTC), Connect as Shown in the Following Diagram:

- Black wire "BK" connected to battery Positive (+) 12V
- White Color Light "R"; "B" and "G" connected to battery Negative (-)
- Green Color Light "G" connected to battery Negative (-)
- Red Color Light "R" connected to battery Negative (-)
- Blue Color Light "B" connected to battery Negative (-)
- Purple Color Light "R" and "B" connected to battery Negative (-)
- Yellow Color Lighters "G" connected to battery Negative (-)



- Cyan Color Light “B” and “G” connected to battery Negative (-)

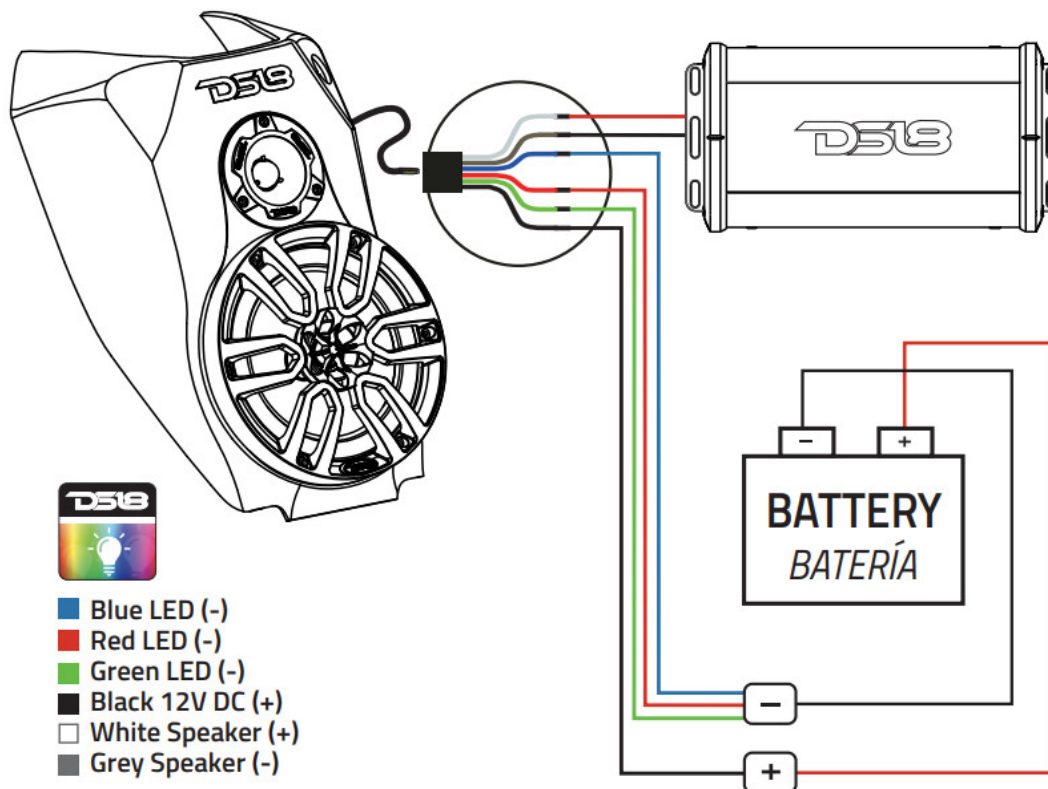

#### GENERAL :

Total Impedance..... 4 Ohms  
 Load Configuration .....Parallel  
 Input Wire .....6 Core OFC Tinned (2ft / 0.6m)

#### SPEAKER SPECIFICATIONS :

Speaker Type ..... 8" Waterproof Coaxial with RGB LED  
 RMS Power Handling .....125W  
 MAX Power Handling .....375W  
 Sensitivity (1w/1m) ..... 93dB  
 Frequency Response ..... 35Hz-23KHz  
 Recommended Hi Pass Crossover ..... 50 Hz  
 Voice Coil Diameter ..... 1.2" / 30.5mm  
 Voice Coil Former Material .....Kapton  
 Winding Material ..... CCAW  
 Cone Material ..... Injection Molded Polypropylene + UV  
 Compliant  
 Surround Material ..... Butyl (Rubber)  
 Basket Material .....High Temp Injection Molded Composite with UV Protection  
 coating  
 Magnet Material ..... Ferrite Neodymium  
 Magnet Weight ..... 14oz + 0.32oz

#### TWEETER SPECIFICATIONS

Speaker Type.....3.8" Super Bullet with RGB LED  
 RMS Power Handling ..... 60W  
 MAX Power Handling .....120W  
 Sensitivity (1w/1m) ..... 103dB  
 Frequency Response ..... 3.5KHz-20KHz  
 Recommended Hi Pass Crossover ..... 4KHz  
 Voice Coil Diameter .....1" / 25.4mm  
 Voice Coil Former Material .....Kapton

Winding Material ..... CCA  
Diaphragm Material .....Aluminum  
Magnet Material .....Ferrite Y30  
Magnet Weight ..... 8 Oz


**BOX SPECIFICATIONS :**

Box Type .....Front Baffle  
Box Material ..... Polyethylene (PE)  
Finish Material .....Black  
UV Protection ..... Yes  
Waterproof Rating ..... IP65

**MEASUREMENT:**

Overall Height ..... 17.4" / 442.2mm  
Overall Width ..... 9.12" / 231.6mm  
Overall Depth ..... 9.44" / 239.8mm

**MEASUREMENTS**

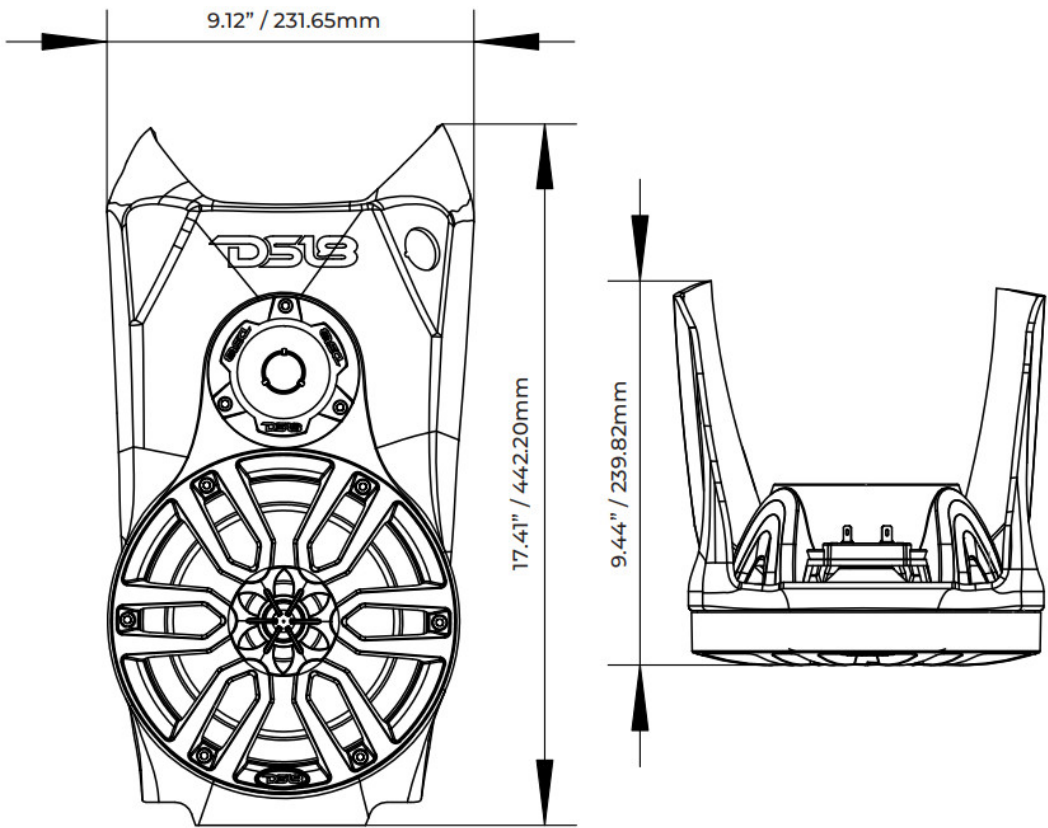

**WARRANTY**

Please visit our website DS18.com for more information on our warranty policy.  
We reserve the right to change products and specifications at any time without notice.  
Images may or may not included optional equipment.

**⚠ WARNING:**  
Cancer and Reproductive Harm. [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov)

SLG-WFCC8LD






FOR MORE INFORMATION  
PLEASE VISIT

[DS18.COM](https://www.ds18.com)

**#WELIKEITLOUD**



## Documents / Resources

	<p><a href="#">DS18 SLG-WFCC8LD Polaris Slingshot Waterfall Center Console Speaker Pod</a> [pdf] Owner's Manual</p> <p>SLG-WFCC8LD, NXL-8BK, PRO-TW1L, SLG-WFCC8LD Polaris Slingshot Waterfall Center Console Speaker Pod, Polaris Slingshot Waterfall Center Console Speaker Pod, Slingshot Waterfall Center Console Speaker Pod, Waterfall Center Console Speaker Pod, Speaker Pod</p>
-----------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## References

- [Official DS18 Pro Audio Store - Speakers, Subwoofers, Amps & More!](#)