



DynaLabs DYN-C-3000-DE Triaxial Capacitive Accelerometers User Manual

[Home](#) » [DynaLabs](#) » DynaLabs DYN-C-3000-DE Triaxial Capacitive Accelerometers User Manual 

Contents

- [1 DynaLabs DYN-C-3000-DE Triaxial Capacitive Accelerometers](#)
- [2 Introduction](#)
- [3 General Information](#)
- [4 Specifications](#)
- [5 Operation and Installation](#)
- [6 Sensor Static Calibration Verification](#)
- [7 Product Support](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)

DynaLabs

DynaLabs DYN-C-3000-DE Triaxial Capacitive Accelerometers



Introduction

Capacitive accelerometers are based on proven micro-electro-mechanical systems (MEMS) technology. These capacitive accelerometers are reliable and long-term stable. These sensors are Differential Ended type DC response sensors. The advantage of these sensors is their outstanding temperature stability, their lightweight and they are low-cost sensors. These sensors have reliable aluminum housing with an IP68 protection class. These sensors feature standard reliable aluminum housing with protection class IP68. Steel housing is also possible. Dynalabs 3000DE series accelerometers provide an outstanding noise performance from 20 to 260 $\mu\text{g}/\sqrt{\text{Hz}}$. These accelerometers provide a wide frequency range ($\pm 3\text{dB}$) from 1,500 Hz to 3,000 Hz.

DYN-C-3000-DE sensors offer the following options;



- Custom Cable Length (5m standard cable)
- Custom Housing Material
- Custom Connector
- Base plate

General Information

Unpacking and Inspection

Dynalabs products provide adequate protection for undamaged products to be transported. Document the damages that occur indirectly during the transport and contact the customer representative.

System Components

The DYN-C-3000-DE has the following components:

- MEMS Sensor
- Calibration Certificate
- Product Manual

Specifications

Table 1: Specifications datasheet

Full scale acceleration	(g)	3002DE	3004DE	3008DE	3010DE	3020DE	3040DE	3050DE	3100DE	3200DE	3500DE
		±2	±4	±8	±10	±20	±40	±50	±100	±200	±500
Frequency range (±3dB)	(Hz)	1,500	1,500	1,500	1,500	1,500	1,500	3,000	3,000	3,000	3,000
Non-linearity (full scale)	(%)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Noise (in band)	($\mu\text{g}/\sqrt{\text{Hz}}$)	25	25	25	80	75	110	35	50	80	170
Scale factor (nominal)	(mV/g)	400	200	100	80	40	20	40	20	10	4
Shock survivability	(g)	5,000	5,000	5,000	5,000	5,000	5,000	5,000	6,000	6,000	6,000

Environmental

Table 2 Environmental specifications datasheet

Protection Level	IP 68
Operating Voltage	6 V – 20 V
Operating Temperature	-40 °C to +100 °C
Operating Current Consumption mA	21 mA
Isolation	Case isolated


Physical

Table 3 Physical specifications datasheet

Sensing Element	MEMS Capacitive
Housing Material	Aluminum or Steel
Connector (Optional)	D-Sub 9 or 15 pin, Lemo, Binder
Mounting	Adhesive or screw mount
Base plate (Optional)	Aluminum or Steel
Weight (without cable)	19g (aluminum)
	44 g (steel)

Outline Drawing

The dimensional properties of DYN-C-3000-DE sensors are given below.

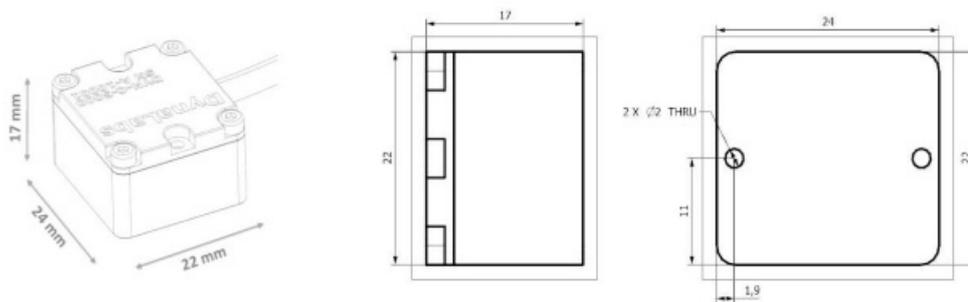

Operation and Installation

General

The general sensor connector configuration is given below; Cable Code/Pin Configuration:

- **Red:** V + Power supply voltage +6 to +20 VDC
- **Black:** Ground Power GND
- **X-Axis: Yellow:** Signal(+) Positive, analog output voltage signal for differential mode.
- **Purple:** Signal(-) Negative, analog output voltage signal for differential mode.
- **Y-Axis: Blue:** Signal(+) Positive, analog output voltage signal for differential mode.
- **Green:** Signal(-) Negative, analog output voltage signal for differential mode.
- **Z- Axis: White:** Signal(+) Positive, analog output voltage signal for differential mode.
- **Orange:** Signal(-) Negative, analog output voltage signal for differential mode.

WARNING

- Never connect the power supply and/or the power ground to yellow, purple, blue, green, white, and/or orange cables.
- Never connect the power supply to the power ground. Always use a clean power source and check the voltage range.

Sensor Static Calibration Verification

Using gravity, voltage values are measured in the + and – directions, providing a value of 1 g. The measurement should be made as follows; When the acceleration value of 3000DE series sensors is entered into the data acquisition system, the sensor shows +1 g with the effect of gravity, which is in the direction of the axis to be calibrated. When the sensor is positioned in the opposite direction to the axis to be calibrated, the arrow shows -1g as shown below under the effect of gravity.

Using gravity, the voltage values that provide 1 g in the + and – directions are measured and compared with the catalog value. The calibration value should be close to the catalog value with a 10% tolerance. Sensor catalog sensitivity values are given in Table 1.



This declaration of conformity is issued under the sole responsibility of the manufacturer. The product(s) are developed, produced and tested according to the following EC- directives:

- 2014/35/EU – Low Voltage Directive (LVD)
- 2006/42/EU – Machinery Safety Directive
- 2015/863/EU – RoHS Directive.

Applied standards:

- EN 61010-1:2010
- EN ISO 12100:2010
- MIL-STD-810-H-2019 (Test Methods: 501.7 – High Temperature, 502.7 – Low

Temperature, 514.8 – Vibration, 516.8 – Shock)

DYNALABS MÜHENDİSLİK SANAYİ TİCARET LİMİTED ŞİRKETİ declares that the above-mentioned products meet all the requirements of the above-mentioned standards and regulations.

Murat Aykan, Technical Manager

Ankara, 15.07.2021

Product Support

If at any time you have questions or problems with the DYN-C-3000-DE sensors, please contact a Dynalabs engineer at:

- Phone: +90 312 266 33 34 (9 a.m. to 5 p.m., UTC +3)
- E-mail: info@dynalabs.com.tr

Warranty

Our products are warranted against defective materials and workmanship for one year. Defects arising from user errors are not covered by the warranty.

Copyright

All copyrights of this manual belonging to Dynalabs products are reserved. It cannot be reproduced without written consent.

Disclaimer

Dynalabs Ltd. provides this publication “as is” without warranty of any kind, express or implied, including but not limited to, the implied warranties of merchantability or fitness for a particular purpose. This document is subject to change without notice, and should not be construed as a commitment or representation by Dynalabs Ltd.

This publication may contain inaccuracies or typographical errors. Dynalabs Ltd. will periodically update the material for inclusion in new editions. Changes and improvements to the product described in this manual may be made at any time.

Documents / Resources

 <small>© 2014 Dynalabs Ltd. All rights reserved. No part of this document may be reproduced without written permission from Dynalabs Ltd.</small>	<p>Dynalabs DYN-C-3000-DE Triaxial Capacitive Accelerometers [pdf] User Manual DYN-C-3000-DE Triaxial Capacitive Accelerometers, DYN-C-3000-DE, Triaxial Capacitive Accelerometers, Capacitive Accelerometers, Accelerometers</p>
--	---